

## CUBE67+ BUS NODE


Ethercat

Cube67+  
EtherCAT

Housing fully potted. For connection cables please see chapter "Connection Technology"  
Cube67+ modules can only be operated on Cube67+, Profibus + ProfiNet bus nodes.

### [Link to Product](#)

#### Illustration

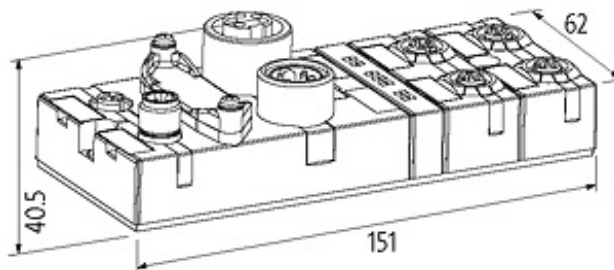

Product may differ from Image

#### Approvals



#### More Info



#### Connections

Fieldbus

M12, D-coded

Sensor-system/actuator supply	7/8", 5-pole, 2 × max. 8 A
-------------------------------	----------------------------

Internal system connection	M12, 6 pole; max. 4 A
----------------------------	-----------------------

### Fieldbus

Transfer rate	to 100 Mbit/s
---------------	---------------

Addressing	automatic
------------	-----------

I/O capacity	Autocrossing Autonegotiation
--------------	------------------------------

### General data

Protection	IP67
------------	------

Mounting method	2-hole screw mounting
-----------------	-----------------------

Temperature range	0...+55 °C (storage temperature -20...+75 °C)
-------------------	---

Dimensions H × W × D	151×62×40.5 mm
----------------------	----------------

### Module Supply

Operating voltage	24 V DC (EN 61131-2)
-------------------	----------------------

Current consumption	max. 200 mA
---------------------	-------------

### Diagnostic

Communication status	per LED and BUS
----------------------	-----------------

Diagnostic via LED	per module and channel
--------------------	------------------------

Diagnostic via BUS	per module and channel
--------------------	------------------------

Monitoring - under voltage	yes
----------------------------	-----

Monitoring - no voltage	yes
-------------------------	-----

Short circuit and overload	yes
----------------------------	-----

### Commercial data

country of origin	DE
-------------------	----

customs tariff number	85176200
-----------------------	----------

minimum order quantity	1
------------------------	---