

6V Electronic Buzzer with 10cm Lead



DESCRIPTION

A 6V DC Panel mount electronic buzzer with flying leads.

DISTINCTIVE FEATURES

- Rated voltage 6V DC
- Sound output 75dB

APPLICATIONS

This buzzer is ideal for warning panels, electronic toys and safety equipment. Also Suitable for inclusion in miniature electronics instrumentation projects.

**6
VDC**

25mA

75dB



ELECTRICAL SPECIFICATION

Rated Voltage	6V DC
Rated current	25mA



GENERAL SPECIFICATION

Type	Electronic buzzer
Resonant Frequency	400Hz \pm 100Hz
Sound Pressure Level min.	75dB @ 20cm



MATERIALS

Material	ABS
Colour	Black



ENVIRONMENTAL/OPERATING SPECIFICATION

Operating Temperature	-20°C to +60°C
Storage Temperature	-30°C to +70°C




TERMINALS

Termination	Flying leads
Lead Length	100mm

DIMENSIONS/DRAWINGS

Units	mm - unless stated otherwise
Dimensions	33.5 x 17 x 15mm
Weight	8g

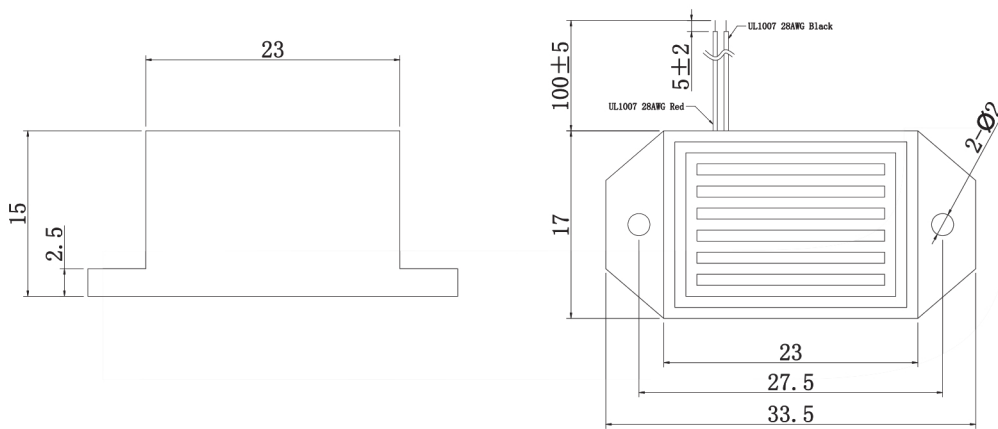

PART NUMBER TABLE

Part Number	EAN	UNSPSC	Country of Origin
52-4449	5053556005666	41112101	China

R-TECH
Tried & trusted technology

Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.