
# R-TECH



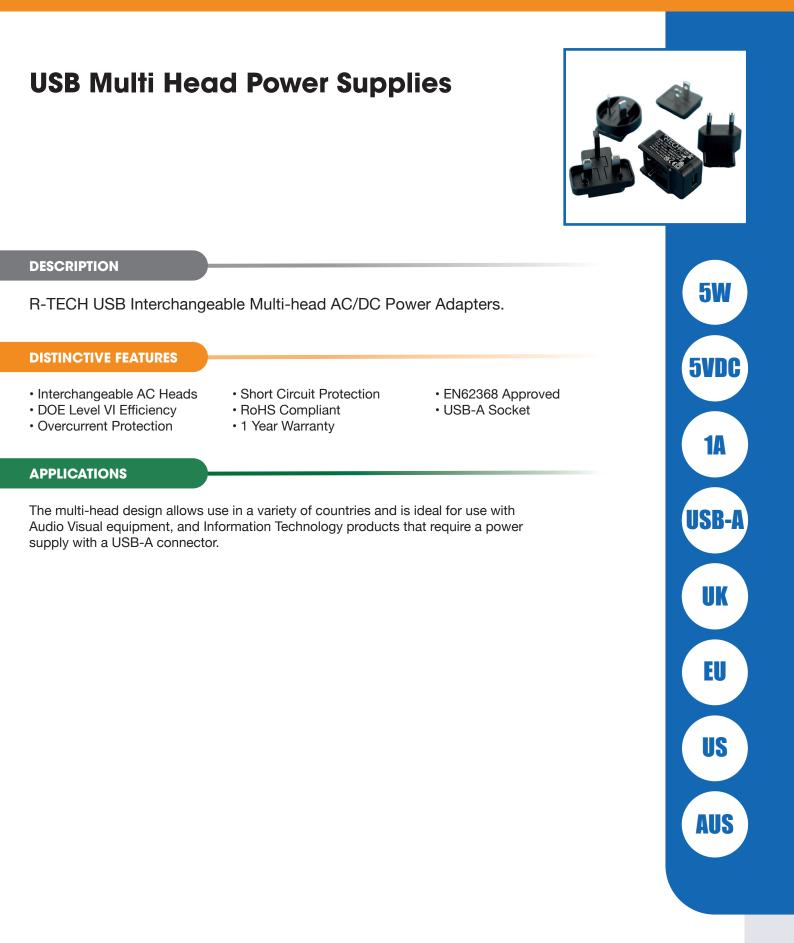

#### **ELECTRICAL SPECIFICATION**

Output			
DC Voltage	5VDC 1A		
Rated Current			
Current Range	0-1A		
Rated Power	5W		
Ripple & Noise	300mVp-p max		
Output Regulation	±5%		
Output Connector	USB-A Socket		
Input			
Voltage Range	90-264VAC		
Frequency Range	47-63Hz		
Nominal Voltage Range	100-240VAC 50-60Hz		
Nominal Frequency Range			
Input Current Inrush Current	0.3A Max		
	40A Max		
Standby Power	0.075W Max		
Leakage Current	0.25A Max		
Input Connector	UK, EU, US & AUS AC Heads		

#### **GENERAL SPECIFICATION**

Series	Power Supplies	
Туре	USB Multi head AC/DC Adapter	
RoHS Compliant	Yes	
DOE	Level VI Efficiency	
Class Rating	Class II Double Insulated	

U-U-U-

MATERIALS

Case Material	Polycarbonate
Case Colour	Black



 $\oslash$ 

-

#### **CERTIFICATION AND STANDARDS**

	UL/CUL 62368-1, GS/TUV EN62368-1, SAA AS/NZ 60950.1, CCC GB4943.1
EMC Emissions	EN55032, RCM GB9254, FCC Part 15 Class B

#### ENVIRONMENTAL/OPERATING SPECIFICATION

Operating Temperature	0°C~40°C	
Cooling	Convection	
Temperature Coefficient	0.05%/°C	
Humidity	5~95%RH (non-condensing)	
Storage Temperature	–20°C~+60%°C	
Operating Environment	Designed for indoor use only, and not suitable for use in damp or wet conditions	


## ₹**-**TECH





### DIMENSIONS/DRAWINGS


Units	mm - unless stated otherwise	
Overall Dimensions	47.0 x 34.57 x 26.5	
Weight	26g	
















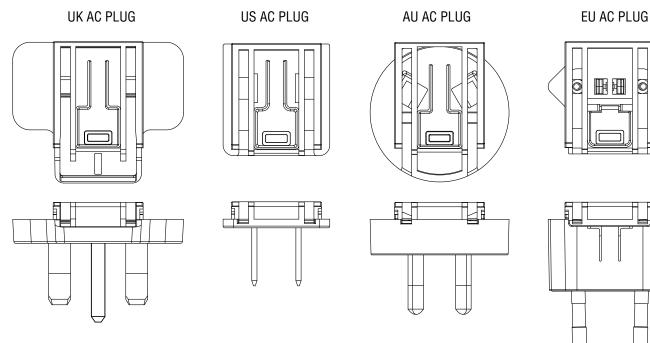





#### PART NUMBER TABLE

Part number	UNSPSC	EAN	Country of Origin
85-7074	39121004	5053556007950	China



Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use of it. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.