

**PROmax**  
**PRO MAX 240W 24V 10A**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com



PROmax offers diverse solutions for demanding automation.

Our high performance and durable PROmax switch-mode power supply units are designed for especially demanding requirements. PROmax reliably copes with continuous overload of up to 20% or short-term peak loads of 300% occurring with high control cabinet temperatures.

High boost capability and full power are also made possible in a wide temperature range. Our switch-mode power supply units can be used around the world and are also suitable for confined spaces thanks to their low width.

Together with our uninterruptible DC USPs, the diode modules or CAP modules, you can create a power supply solution that is tailored to your requirements.

#### General ordering data

Type	PRO MAX 240W 24V 10A
Order No.	<a href="#">1478130000</a>
Version	
GTIN (EAN)	4050118286052
Qty.	1 pc(s).

**PROmax**  
**PRO MAX 240W 24V 10A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions and weights**

Width	60 mm	Height	130 mm
Depth	125 mm	Net weight	1,050 g

**Temperatures**

Humidity at operating temperature	5...95 %, no condensation	Operating temperature	-25 °C...70 °C
Storage temperature	-40 °C...85 °C		

**Input**

AC current consumption	1.5 A @ 230 V AC / 3 A @ 115 V AC	AC input voltage range	85...277 V AC
Connection system [Input]	Screw connection	DC current consumption	1,5A @ 370 VDC / 3A @ 120 VDC
DC input voltage range	80...370 V DC	Frequency range AC	45...65 Hz
Input fuse (internal)	Yes	Inrush current	max. 15 A
Rated input voltage	100...240 V AC (wide-range input)	Recommended back-up fuse	10 A, char. B circuit breaker, 6...8 A, char. C circuit breaker

**output**

Connection system [Output]	Screw connection	Continuous output current @ $U_{Rated}$	12 A @ 45°C, 7,5 A @ 70°C
Output voltage	22.5...29.5 V (adjustable via potentiometer)	Parallel connection option	yes, max. 5
Power boost @ $U_{Rated}$	12 A (1 min), 15 A (4s)	Pulsed current capacity @ $U_{Rated}$	30 A (2ms)
Rated (nominal) output current @ $U_{Nom}$	10 A @ 60 °C	Rated output voltage	24 V DC $\pm$ 1 %
Residual ripple, breaking spikes	< 50 mVss @ $U_{Nenn}$ , Full Load		

**General data**

AC failure bridging time @ $I_{Nom}$	min. 20 ms	Current limiting	> 120 % $I_N$
Degree of efficiency	91.5%	Derating	> 60°C / 75% @ 70°C
Earth leakage current, max.	3.5 mA	Housing version	Metal, corrosion resistant
MTBF	>500.000h (25°C, IEC 61709)	Mounting position, installation notice	Horizontal on TS35 mounting rail, with 50 mm of clearance at top and bottom for air circulation. Can be mounted side by side with no space in between.
Operating temperature	-25 °C...70 °C	Power factor (approx.)	> 0.95 @ 230 V AC
Power loss, idling	2.4 W	Power loss, nominal load	22.3 W
Protection against reverse voltages from the load	30...35 V DC	Series switching capability	Yes
Start-up	$\geq$ -40 °C	Status indication	LED red/green and relay ( $\geq$ 21.6 V DC LED green, relay on/ $\leq$ 20.6 LED red, relay off)
Surge voltage category	III		

**PROmax**  
**PRO MAX 240W 24V 10A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****EMC / shock / vibration**

Vibration resistance IEC 60068-2-6	2.3 g	Interference immunity test acc. to	EN 55024, EN 55022, IEC61000-3-2,-3, IEC61000-4-2,-3,-4,-5,-6,-8,-11
Shock resistance IEC 60068-2-27	30 g in all directions		

**Insulation coordination**

Class of protection	I, with PE connection	Humidity at operating temperature	5...95 %, no condensation
Insulation voltage input / earth	3.5 kV	Insulation voltage output / earth	0.5 kV
Insulation voltage, input/output	4 kV	Pollution severity	2
Surge voltage category	III		

**Electrical safety (applied standards)**

Electrical machine equipment	Acc. to EN60204	For use with electronic equipment	Acc. to EN50178 / VDE0160
Protection against dangerous shock currents	Acc. to VDE0106-101	Protective separation / protection against electrical shock	VDE0100-410 / acc. to DIN57100-410
Safety extra-low voltage	SELV acc. to EN60950, PELV acc. to EN60204, IEC61204	Safety transformers for switch-mode power supplies	IEC61558-2-16

**Connection data (input)**

Conductor cross-section, AWG/kcmil , max.	10	Conductor cross-section, AWG/kcmil , min.	26
Conductor cross-section, flexible , min.	0.22 mm <sup>2</sup>	Conductor cross-section, rigid , max.	6 mm <sup>2</sup>
Conductor cross-section, rigid , min.	0.18 mm <sup>2</sup>	Connection system [Input]	Screw connection
Number of terminals [Input]	3 for L/N/PE	Screwdriver blade	0.8 x 4.0, PZ 1
Tightening torque, max.	0.6 Nm	Tightening torque, min.	0.5 Nm
Wire connection cross section, flexible (input), max.	4 mm <sup>2</sup>		

**Connection data (output)**

Conductor cross-section, AWG/kcmil , max.	10	Conductor cross-section, AWG/kcmil , min.	26
Conductor cross-section, flexible , max.	4 mm <sup>2</sup>	Conductor cross-section, flexible , min.	0.22 mm <sup>2</sup>
Conductor cross-section, rigid , max.	6 mm <sup>2</sup>	Conductor cross-section, rigid , min.	0.18 mm <sup>2</sup>
Connection system [Output]	Screw connection	Number of terminals [Output]	8 (+, -, 11, 13, 14)
Screwdriver blade	0.8 x 4.0, PZ 1	Tightening torque, max.	0.6 Nm
Tightening torque, min.	0.5 Nm		

**Signalling**

Contact load (NO contact)	max. 30 V DC / 1 A	Floating contact	Yes
Status indication	LED red/green and relay (≥21.6 V DC LED green, relay on/ ≤20.6 V DC LED red, relay off)		




**Data sheet**

**PROmax**  
**PRO MAX 240W 24V 10A**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com


**Drawings**

**Electric symbol**

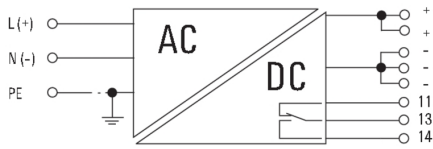

Pay attention to polarity of DC connection

**Derating curve**

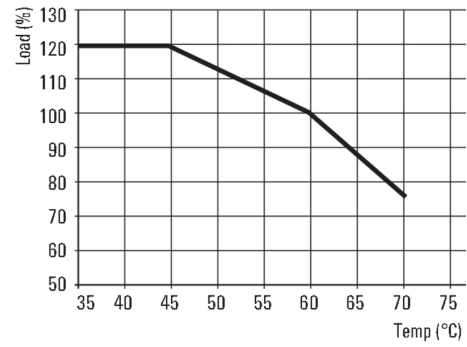


# Adressen weltweit

Let's connect.

- AE Vereinigte Arabische Emirate**  
Weidmüller Middle East FZE  
Warehouse Q3-79  
SAIF-Zone  
P.O. BOX 8591  
Sharjah  
Telefonnummer +971 65572723  
Faxnummer +971 65572724  
wme.info@weidmueller.com
- AO Angola**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika
- AR Argentinien**  
CPI SA  
Bauness 2660  
C1431DOF Buenos Aires  
Telefonnummer +54 11 4523 8008  
Faxnummer +54 11 4522 0546  
info@cpi.com.ar  
www.cpi.com.ar
- AT Österreich**  
Weidmüller GmbH  
IZ NOE Süd Straße 2b, Obj  
M 59  
2355 Wiener Neudorf  
Telefonnummer +43 2236 67080  
Faxnummer +43 2236 6708-899  
office.at@weidmueller.com  
www.weidmueller.com
- AU Australia**  
Weidmüller Pty. Ltd.  
PO BOX 6944  
Huntingwood 2148  
Huntingwood Drive 43  
Huntingwood NSW 2148  
Telefonnummer +61 2 9671 9999  
Faxnummer +61 2 9671 9911  
info@weidmueller.com.au  
www.weidmueller.com.au
- AZ Aserbaidtschan**  
Repräsentanz Büro  
Rashad Mahmudov  
Demirchi Tower, 4th floor  
37, Khojali ave.  
AZ 1025 Baku  
Telefonnummer +994 12 488 80 36  
Faxnummer +994 12 488 80 37  
rashad.mahmudov@weidmueller.com
- BA Bosnien und Herzegowina**  
Bitte kontaktieren Sie  
unser Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
Serbien  
  
oder  
  
BIG electric d.o.o  
Mladena Stojanovića 117A  
78000 Banja Luka  
Telefonnummer +387 51926277  
Faxnummer +387 51926277  
bigelectric@blic.net  
www.bigelectric.ba
- BE Belgien**  
Weidmüller Benelux B. V.  
Mechelsesteenweg 519 bus  
6 an 7  
1930 Nossegem  
Telefonnummer +32 2 752 40 70  
Faxnummer +32 2 751 36 06  
info@weidmueller.be  
www.weidmueller.be
- BG Bulgarien**  
Weid-Bul EOOD  
Bul. "Kliment Ohridski" 13  
1756 Sofia  
Telefonnummer +359 2 963 2560  
Faxnummer +359 2 963 1098  
sofia@weidbul.com  
www.weidbul.com
- BH Bahrain**  
Khayber Trading Company  
P.O Box 1976  
Manama  
Telefonnummer +973 720747  
Faxnummer +973 720331  
khayber@batelco.com.bh
- BR Brasilien**  
Weidmüller Conexel do Brasil  
Conexões Elétricas Ltda.  
Av. Presidente Juscelino, 642  
- Piraporinha  
Diadema, São Paulo  
09950-370  
Telefonnummer +55 (11) 4366-9600  
Faxnummer +55 (11) 4362-1677  
vendas@weidmueller.com.br  
www.weidmueller.com.br
- BW Botswana**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika
- BY Weißrussland**  
TECHNIKON Ltd.  
Nezavisimosti pr. 177-9  
220125 Minsk  
Telefonnummer +375 17 393-11-77  
Faxnummer +375 17 3930080  
wm@technikon.by
- CA Kanada**  
W Interconnections Canada  
Inc.  
10 Spy Court  
Markham Ontario L3R 5H6  
Telefonnummer +1 (905) 475-1507 Ext. 9836  
Faxnummer +1 (905) 475-2798  
support@weidmuller.ca  
www.weidmuller.ca
- CG Kongo**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika
- CH Schweiz**  
Weidmüller Schweiz AG  
Rundbuckstraße 2  
82 12 Neuhausen am  
Rheinfall SH  
Telefonnummer +41 52 674 07 07  
Faxnummer +41 52 674 07 08  
info@weidmueller.ch  
www.weidmueller.ch
- CL Chile**  
ATS- INTECH  
Maria Luisa Santander 0475  
Santiago  
Providencia 7500859  
Telefonnummer +56 2 341 1271  
Faxnummer +56 2 341 1275  
felipe@atsintech.com  
www.atsintech.com  
  
CPI CHILE LTDA  
Av. Presidente Frei Montalva  
6001, 47 complejo el cortijo  
Santiago - Conchalí  
Telefonnummer +562 963 8440  
cpi@cpichile.cl  
www.cpichile.cl
- CN China**  
Weidmüller Interface  
(Shanghai) Co. Ltd.  
100 Yutong Road  
25 F. BM Intercontinental  
Business Center  
200070 Shanghai  
Telefonnummer +86 21-22195008  
Faxnummer +86 512-68417505  
customer.hotline@weidmueller.com.cn  
www.cnweidmuller.com
- CO Kolumbien**  
Automatización Avanzada  
S. A.  
Carrera 97 No., 24 c - 23  
Bodega 4  
110911 Bogotá-D.C.  
Telefonnummer +57 (1) 547-8510  
Faxnummer +57 (1) 422-3044  
comercial@  
automatizacionavanzada.com  
www.  
automatizacionavanzada.com
- CR Costa Rica**  
ELVATRON S. A.  
la Uruca 400 Norte Banco  
Costa Rica  
San Jose Costa Rica  
Telefonnummer +506 2961-060  
Faxnummer +506 5200-609  
dirk.haese@elvatron.com  
www.elvatron.com
- CZ Tschechische Republik**  
Weidmüller s.r.o.  
Lomnického 5/1705  
140 00 Praha 4  
Telefonnummer +420 244 001 400  
Faxnummer +420 244 001 499  
office@weidmueller.cz  
www.weidmueller.cz
- DE Deutschland**  
Weidmüller GmbH & Co. KG  
Ohmstraße 9  
32758 Detmold  
Postfach 30 54  
32720 Detmold  
Telefonnummer +49 5231 1428-0  
Faxnummer +49 5231 14-292083  
weidmuller@weidmueller.de  
www.weidmueller.de
- DK Dänemark**  
Weidmüller Danmark  
Vallensbækvej 18A  
2605 Brøndby  
Telefonnummer +45 27747800  
kundeservice@weidmuller.dk  
www.weidmuller.dk
- EC Ecuador**  
Elsystec S. A., Electricidad  
Sistemas y Tecnología  
Vasco de Contreras N35-251  
y Mañosa  
Quito - Pichincha  
Telefonnummer +593 22456510  
Faxnummer +593 22456755  
Elsystec@uiio.satnet.net
- EE Estland**  
Bitte kontaktieren Sie  
unser Representative Office  
Weidmüller Interface GmbH  
& Co. KG  
Lettland  
  
oder  
  
Soots Interface OÜ  
Pärnu mnt 142  
11317 Tallinn  
Telefonnummer +372 609 6933  
Faxnummer  
info@sootsinterface.ee  
www.sootsinterface.ee
- EG Ägypten**  
Standard Electric (OMEGA)  
87, Mohamed Farid Street  
Heliopolis  
Cairo  
Telefonnummer +202 26229000  
Faxnummer +202 26221555  
stdelec@rite.com
- ES Spanien**  
Weidmüller, S. A.  
Narcis Monturiol 11-13, Pol.  
Ind. Sudoeste  
8960 Sant Just  
Desvern - Barcelona  
Telefonnummer +34 934 803 386  
Faxnummer +34 933 718 055  
weidmuller@weidmuller.es  
www.weidmuller.es
- FI Finnland**  
Weidmüller Suomi,  
Weidmüller Aktiebolagetin  
sivuliike  
Koy Plaza Vivace  
Äyritie 8C  
FI 15100 Vantaa  
Telefonnummer +358 20 7351300  
Faxnummer +358 800 114 667  
asiakaspalvelu@weidmuller.fi  
www.weidmuller.fi
- FR Frankreich**  
Weidmüller E. U. R. L.  
12, Chaussée Jules César  
BP 263 Osny  
95523 Cergy-Pontoise Cedex  
Telefonnummer +33 1 34 24 55 00  
Faxnummer +33 1 34 24 55 01  
mail@weidmuller.fr
- GB Großbritannien**  
Weidmüller Ltd.  
Klippon House  
Centurion Court Office Park,  
Meridian East, Meridian  
Business Park  
Leicester  
LE19 1TP  
Telefonnummer +44 116 282 3470  
Faxnummer +44 116 289 3582  
marketing@weidmuller.co.uk  
www.weidmuller.co.uk
- GE Georgien**  
Bitte kontaktieren Sie  
unser Representative Office  
Rashad Mahmudov  
Aserbaidtschan.
- GR Griechenland**  
G.A. Solutions  
Ippokratous 11 Metamorfosi  
144 52 Athen  
Telefonnummer +30 210 2823233  
Faxnummer +30 210 2823233  
info@weidmuller.gr  
www.weidmuller.gr
- GT Guatemala**  
Prestelectro, Prestegard  
Electro, S.A.  
Avenida Petapa 44-22,  
Zona 12  
Guatemala City  
Telefonnummer +502 2442-3346  
Faxnummer +502 2476-8945  
ventas@prestelectro.com
- HK Hong Kong**  
Weidmüller (Hong Kong)  
Limited Co. Ltd.  
Unit 1617, Metropolis Tower  
No. 10 Metropolis Drive,  
Hunghom, Kowloon  
Telefonnummer +852 3154 8088  
Faxnummer +852 31548099  
Info-hk@weidmueller.com.hk
- HR Kroatien**  
ElektroPARTNER d.o.o.  
Slavonska avenija 24/6  
HR-10000 Zagreb  
Telefonnummer +385 (1) 6184 793  
Faxnummer +385 (1) 6184 795  
elektropartner@zg.t-com.hr  
www.elektropartner.hr
- HU Ungarn**  
Weidmüller Kereskedelmi Kft.  
Budapest  
Gubacsi út 6.  
1097  
Telefonnummer +36 1 382 7700  
Faxnummer +36 1 382 7701  
info@weidmueller.hu  
www.weidmueller.hu
- ID Indonesien**  
PT. Nego Electrindo  
Ruko Mega Grosir Cempaka  
Mas Blok 1 No. 20 - 22  
Jakarta 10640  
Telefonnummer +62 21 42882255  
Faxnummer +62 21 42882266  
sales@negoelectrindo.co.id
- IE Irland**  
Bitte kontaktieren Sie  
Weidmüller Ltd.  
Großbritannien
- IL Israel**  
A. U. Shay Ltd.  
23/25, Embar Street  
49222 Petach-Tikva  
P.O. Box 1 00 49  
49222 Petach-Tikva  
Telefonnummer +972 3-923-3601  
Faxnummer +972 3-923-4601  
shay@uriel-shay.com  
www.uriel-shay.com
- ATEKA Ltd.**  
4, Ha Tavor lane Industrial  
area Segula  
49691 Petach-Tikva  
P.O. Box 4710  
Petach-Tikva  
Telefonnummer +972 73-200-1311  
Faxnummer +972 3-924 4245  
marketing@ateka.co.il  
www.ateka.co.il
- IN Indien**  
Repräsentanz Büro  
Weidmüller Electronics India  
Pvt. Ltd.  
12th Lane North Avenue, Opp  
Joggers Park,  
Kalyani Nagar, Pune  
411 006  
Telefonnummer +91 20-41290090  
wmi.pune@weidmueller.in  
www.weidmueller.com
- IS Island**  
Samey Automation Center  
Lyngas 13  
210 Garoabaer  
Telefonnummer +354 510 5200  
Faxnummer +354 5 10 5201  
Samey@samey.is  
www.samey.is
- IT Italien**  
Weidmüller S. r.l.  
Via Albert Einstein 4  
20092 Cinisello  
Balsamo Milano  
Telefonnummer +39 02 660681  
Faxnummer +39 02 6124945  
weidmuller@weidmuller.it  
www.weidmuller.it
- JM Jamaika**  
Bitte kontaktieren Sie  
W Interconnections Inc.  
USA
- JO Jordanien**  
Trans Jordan for Electro  
PO Box 33 06 07  
Amman  
Telefonnummer +962 6 533 2020  
Faxnummer +962 6 533 5800  
transjordan@batelco.jo
- JP Japan**  
Nihon Weidmüller Co. Ltd.  
Sphere Tower Tennoz 2-2-8  
Higashi-Shinagawa,  
Shinagawa-ku  
Tokyo  
140-0002  
Telefonnummer +81 3 6711 5300  
Faxnummer +81 3 6711 5333  
weidmullerjapan@weidmuller.com.jp  
www.weidmuller.co.jp



Alle Weidmüller Adressen sowie Ihren lokalen Ansprechpartner finden Sie im Internet unter: [www.weidmuller.com/countries](http://www.weidmuller.com/countries)

Vertriebsgesellschaft   
 Auslandsvertretung   
 ohne Auslandsvertretung 

Let's connect.

- KE Kenia**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- KR Korea**  
Weidmüller Korea Co. Ltd. 9th floor, Wonbang B/D Samseong 2-Dong, Gangnam-Gu Seoul 143-42  
Telefonnummer +82 2-516-0003  
Faxnummer +82 2-516-0090  
info@weidmuller.co.kr  
www.weidmuller.co.kr
- KW Kuwait**  
Kana Controls General Trading & Contracting Co. W. L. L. Al Rai Industrial Area, Plot 28-30, St. 31 13016 Safat B.P. 25593  
Telefonnummer +965 4741373  
Faxnummer +965 4741537  
info@kanacontrols.com
- KZ Kasachstan**  
Bitte kontaktieren Sie OOO Weidmüller Russland
- LB Libanon**  
Progress Engineering & Trading Enterprises Al Nahr Street Beirut 11-1111  
Telefonnummer +961 1 444 664  
Faxnummer +961 1 561 880  
progress@inco.com.lb
- LT Litauen**  
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Lettland  
oder  
ELEKTROS IRANGA Tinklu g. 29 a LT-5319 Panevezys  
Telefonnummer +370 (45) 582 828  
Faxnummer  
info@eliranga.lt
- LU Luxemburg**  
Bitte kontaktieren Sie Weidmüller Benelux B. V. Niederlande
- LV Lettland**  
SIA Abi4 Daugavgrivas 31b Riga, LV-1007  
Telefonnummer +371 674 70999  
Faxnummer +371 676 24562  
abi\_4@tvnet.lv  
Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Udens str. 12-118 Riga, LV-1007  
Telefonnummer +371 29254766  
Faxnummer +371 674 65637  
lgonis.rudaks@weidmueller.com  
www.weidmueller.com
- MD Moldawien**  
BERHORD A & D srl 79/1, str. Milescu Spartaru MD-2075 Chisinau Moldova  
Telefonnummer +373 (22) 815002  
Faxnummer +373 (22) 815007  
atiuleanu@berhord.com  
www.ad.berhord.com
- ME Montenegro**  
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien.
- MG Madagaskar**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- MK Mazedonien**  
Bitte kontaktieren Sie unser Representative Office Weidmüller Interface GmbH & Co. KG Serbien  
oder  
ELEKTRO - SMK doool UL. III Makedonska brigada b.b. 1000 Skopje  
Telefonnummer +389 22460295  
Faxnummer  
Elektro-smk@telekabel.net.mk
- MT Malta**  
E. S. S., Electrical Supplies & Services Ltd. San Gwakklin Road Mriehel  
Telefonnummer +356 21255777  
Faxnummer +356 21255999  
robert.agius@ess.com.mt
- MU Mauritius**  
Mubelo Electrical Ltd. Office 26, Gateway building, St Jean Road Quatre Bornes Mauritius  
Telefonnummer +230 4670989  
Faxnummer +230 4654051  
richard.mubelo@orange.mu
- MW Malawi**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- MX Mexiko**  
W Interconnections S. A. DE C. V. Blvd. Hermanos Serdan 698, Col. San Rafael Oriente 72029 Puebla  
Telefonnummer +52 (222) 268 6227  
Faxnummer +52 (222) 286 6242  
clientes@weidmuller.com.mx
- MY Malaysia**  
Connect Plus Technology Sdn Bhd No. 43, Jalan PJS 11/22, Bandar Sunway 46150 Petaling Jaya Selangor Darul Ehsan  
Telefonnummer +60 3 5633 7363  
Faxnummer +60 3 5633 6562  
paul@cptech.com.my  
www.cptech.com.my
- MZ Mosambik**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- NA Namibia**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- NG Nigeria**  
Bitte kontaktieren Sie
- NL Niederlande**  
Weidmüller Benelux B. V. Franciscusweg 221 1216 SE Hilversum Postfach 1505 1200 BM Hilversum  
Telefonnummer +31 35 626 12 61  
Faxnummer +31 35 623 20 44  
info@weidmuller.nl  
www.weidmuller.nl
- NO Norwegen**  
Sivilingeniør J.F. Knudtzen AS Billingstadsletta 97 1396 Billingstad PO Box 160 1378 Nesbru  
Telefonnummer +47 66 98 33 50  
Faxnummer +47 66 98 09 55  
firmapost@jfknuudtzen.no  
www.jfknuudtzen.no
- NZ Neuseeland**  
Cuthbert S. Steward Ltd. 27 Te Puni Street Petone PO Box 38496 Wellington Mail Centre 5054  
Telefonnummer (09) 489 6156  
Faxnummer (09) 489 1752  
csl@cuthbertsteward.co.nz  
Cuthbert S. Steward Ltd 4 Fred Thomas Drive Aon Building, Ground Floor, South Entry Takapuna PO Box 100 338 North Shore City 745  
Telefonnummer (04) 489 1751  
Faxnummer (04) 568 6056  
cslak@cuthbertsteward.co.nz
- OM Oman**  
DAN INTERNATIONAL LLC. Ghala St. 111 BP 2901 Seeb  
Telefonnummer +968 5036 77  
Faxnummer +968 5037 55  
yedu@danintl.com
- PE Peru**  
IMPEXINCA S.A.C. Calle Ortiz de Zevallos No. 105, Urb. San Antonio 18 Lima, Miraflores  
Telefonnummer +51 1 447 5608  
info@impexinca.pe  
www.impexinca.pe  
J & W CIA. S. A. Calle 6 Mz. D Lte. 23, Urb. Ind. Grimanesa 01 Callao  
Telefonnummer +51 1 572 2539  
Faxnummer +51 1 572 0152  
contacto@jwcia.com  
www.jwcia.com
- PH Philippinen**  
Enclosure Systems Specialists Inc. 2276 Don Chino Roces Avenue Extension Room 103/105 Narra Building 1231 Makati City  
Telefonnummer +63 2 813 8580  
Faxnummer +63 2 813 8596  
sales\_encsys@pltdsl.net  
www.enclosuresystemsph.com
- PK Pakistan**  
Automation Controls (Pak) Apartment No. 33 C III, Chenab Block, Allama Iqbal Town Lahore  
Telefonnummer +92 42 37809948  
Faxnummer +92 42 37809950  
nadeem@acpак.com.pk  
www.acpак.com.pk
- PL Polen**  
Weidmüller Sp. z o. o. ul. Ogrodowa 58 00-876 Warszawa  
Telefonnummer +48 22 510 09 40  
Faxnummer +48 22 510 09 41  
biuro@weidmuller.com.pl  
www.weidmuller.pl
- PT Portugal**  
Weidmüller Sistemas de Interface S. A. Estrada Outeiro Polima, R. Augusto Dias da Silva, Lote B - Esc. 2 São Domingos de Rana 2785-515 Abóboda  
Telefonnummer +351 214 459 191  
Faxnummer +351 214 455 871  
weidmuller@weidmuller.pt  
www.weidmuller.pt
- PY Paraguay**  
Bitte kontaktieren Sie CPI SA Argentinien
- QA Katar**  
Petroleum Technology Co. W.L.L. PO Box 16069 5th Floor Toyota tower  
Telefonnummer +974 444 19603  
Faxnummer +974 444 19604  
petrotec@qatar.net.qa  
www.petrotec.com.qa
- RO Rumänien**  
Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ionescu Crum Street, No. 1, 1st Tower, 1st Floor, Office 4 500446 Brasov - Brasov Business Park  
Telefonnummer +40 (268) 446 222  
Faxnummer +40 (262) 205 410  
claudiu.totea@weidmueller.com  
www.weidmueller.com
- RS Serbien**  
Repräsentanz Büro Weidmüller Interface GmbH & Co. KG Ustanička 189, III sprat lokal 7a 11050 Beograd  
Telefonnummer +381 112885274  
Faxnummer +381 112885274  
zoran.rabrenovic@weidmueller.com  
TeLa Elektrik d.o.o. Ul. Dr. Drage Ljočić 6 Beograd  
Telefonnummer +381 11 2772 415  
Faxnummer +381 11 2772 850  
office@tela.rs  
www.tela.rs
- RU Russland**  
OOO Weidmüller Warschavskoye highway, 25 A, bld. 6 Moskau 117105  
Telefonnummer +7 (495) 771-69-40  
Faxnummer +7 (495) 771-69-41  
Info@weidmueller.ru  
www.weidmueller.ru
- SA Saudi-Arabien**  
Al Abdulkarim Holding Co. P.O. Box 4 Dammam 31411  
Telefonnummer +966 3 8337110  
Faxnummer +966 3 8829547  
E-Mail salehsk@akh.com.sa  
www.weidmueller.ae  
Saudi Electric Supply Company (SESCO) P.O. Box 32 98 Al Khobar 31952  
Telefonnummer +966 3 8829546 Ext. 3030  
Faxnummer  
E-Mail Safdar.Malik@sescogex.com  
www.sesco-gex.com
- SE Schweden**  
Weidmüller AB Axel Danielssons väg 271 BOX 3 1025 SE-200 49 Malmö  
Telefonnummer +46 77-143 00 44  
Faxnummer +46 40-37 48 60  
info@weidmuller.se  
www.weidmuller.se
- SG Singapur**  
Weidmüller Pte. Ltd. 70 Bendemeer Road # 04-03 Luzerne Building Singapore 339940  
Telefonnummer +65 6841 5311  
Faxnummer +65 6841 5377  
info@weidmuller.com.sg  
www.weidmuller.com.sg
- SI Slowenien**  
Elektrospoj d. o. o. Stegne 27 SI-1000 Ljubljana  
Telefonnummer +386 1 511 3810  
Faxnummer +386 1 511 1604  
info@elektrospoj.si  
www.elektrospoj.si
- SK Slowakei**  
ELEKTRIS s.r.o. Elektrárská 1 831 04 Bratislava  
Telefonnummer +421 2/4920 0113  
Faxnummer +421 2/4920 0119  
bratislava@elektris.sk
- SV El Salvador**  
Prestegard Norte 11 Avenida Electro No. 240 Edificio Salazar No. 2 San Salvador  
Telefonnummer +503 2271 1690  
Faxnummer +503 2221 3851  
prestegard@navegante.com.sv
- SY Syrien**  
Bitte kontaktieren Sie Weidmüller Middle East FZE Vereinigte Arabische Emirate
- SZ Swasiland**  
Bitte kontaktieren Sie Phambili Interface Südafrika
- TH Thailand**  
Pisanu Engineering Co. Ltd. Kwang Dingaeng, Khet Dingaeng 800/2 Soi Trakulsuk, Asok-dindaeng Road Dindaeng, Bangkok 10400  
Telefonnummer +66 2 248 2896  
Faxnummer +662 105 6301  
ecsales@pisanu.co.th  
www.pisanu.co.th  
Repräsentanz Büro Weidmüller Pte. Ltd. 37/F, Sathorn Square Building 98 Sathorn Road Bangkok, Silom Bangrak 10500  
Telefonnummer +66 2 105 6300  
Faxnummer +66 2 642 9220  
info@weidmuller.com.sg
- TN Tunesien**  
Bitte kontaktieren Sie Weidmüller E. U. R. L. Frankreich
- TR Türkei**  
Weidmüller Elektronik Ticaret Ltd. Sirketi Kavacik Mah. Orhan Veli Kanik Caddesi 9/1 34810 Beykoz / Istanbul  
Telefonnummer +90 (216) 537 10 70  
Faxnummer +90 (216) 537 10 77  
info@weidmuller.com.tr  
www.weidmuller.com.tr

# Adressen weltweit

Let's connect.

**TW Taiwan**  
Weidmuller (Hong Kong)  
Limited  
No. 3, Lane 89, ChaungYang  
N. Rd  
24148 SanChuang City,  
Taipei  
Telefonnummer +886 921  
949 751  
roy.lin@weidmueller.com.hk

**TZ Tansania**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika

**UA Ukraine**  
LLC WM UKRAINE  
Levanevskogo str. 6  
Kiev  
3058  
Telefonnummer +38 044  
490 32 48  
Faxnummer  
info@wm-ua.com.ua  
wm-ua.com.ua/  
  
Repräsentanz Büro  
Weidmueller Interface GmbH  
& Co. KG  
Z. office 303  
7-D, Zdolbunivska str.  
Kiev, 2081  
Telefonnummer (Mobil) +38  
050 440 25 24  
info.ua@weidmueller.com

**US USA**  
W Interconnections Inc.  
821 Southlake Boulevard  
Richmond Virginia 23236  
Telefonnummer +1 (804)  
794-2877  
Faxnummer +1 (804) 379-  
2593  
info@weidmuller.com  
www.weidmuller.com

**UY Uruguay**  
REWO Uruguay S. A.  
AV. Bolivia 2001Esq  
Rocafuerte  
11300 Carrasco Montevideo  
Telefonnummer +598 2604  
8439  
Faxnummer +598 2604  
8439  
rewo@rewouruguay.com.uy

**UZ Usbekistan**  
Bitte kontaktieren Sie  
OOO Weidmüller  
Russland

**VE Venezuela**  
Somerinca C. A.  
Corazon de Jesus - 3ra  
Transversal con calle el  
Carmen- Los Dos Caminos  
Caracas 1070-A  
Telefonnummer +58  
2122352748  
Faxnummer +58  
2122399341  
klocmoeller@cantv.net  
www.somerinca.com

**VN Vietnam**  
AUMI Industrial Equipment &  
Automation Company Limited  
E1, La Thanh Hotel  
218 Doi Can Street  
Lieu Giai Ward, Ba Dinh  
District  
Hanoi City  
Telefonnummer +84 4  
37628601  
Faxnummer +84 4  
62661391  
aumi@aumi.com.vn  
www.aumi.com.vn  
  
Repräsentanz Büro  
Weidmüller Pte. Ltd.  
Level 16 Saigon Tower  
Building  
29 Le Duan Street  
District 1  
Ho Chi Minh  
Telefonnummer +848 3520  
7717  
Faxnummer +848 3520  
7604  
info@weidmuller.com.sg

**ZA Südafrika**  
Phambili Interface  
PO Box 193  
1609 Johannesburg, Edenvale  
5 Bundo Road, Sebenza  
1610 Johannesburg  
Telefonnummer +27 (11)  
4521930  
Faxnummer  
info@weidmuller.co.za  
www.weidmuller.co.za

**ZM Sambia**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika

**ZW Simbabwe**  
Bitte kontaktieren Sie  
Phambili Interface  
Südafrika