# SMART SENSOR BUSINESS

# Leuze electronic

the sensor people





Part no.: 50116308 BCL 301i SM 100 Stationary bar code reader



Figure can vary

# Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- · Operation and display
- · Part number code
- Notes
- Accessories

## **Technical data**

| PCI 200i  |
|---|
| BCL 300i  |
|   |
|   |
| Alignment mode<br>AutoConfig<br>AutoControl<br>AutoReflAct<br>Code fragment technology<br>LED indicator<br>Reference code comparison                          |
|   |
| 440 vicente   |
| 110 years   |
|   |
|   |
| 2/5 Interleaved<br>Codabar<br>Code 128<br>Code 39<br>Code 93<br>EAN 8/13<br>GS1 Databar Expanded<br>GS1 Databar Limited<br>GS1 Databar Omnidirectional<br>UPC |
| 1,000 scans/s   |
| 64 Piece(s)   |
| 30 290 mm   |
| Laser , Red   |
| 655 nm  |
| 2, IEC/EN 60825-1:2007  |
| Continuous  |
| 60 °  |
| 0.2 0.5 mm  |
| Line scanner with deflecting mirror   |
| By means of rotating polygon mirror wheel + deflecting mirror   |
| Lateral with deflecting mirror  |
|   |
|   |
| Polarity reversal protection  |
|   |
| 18 30 V , DC  |
| 4.5 W   |
|   |
| 60 mA   |
|   |
| 2 Piece(s)  |
| 2 Piece(s)<br>8 mA  |
|   |
|   |
|   |

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199

# Leuze electronic

# Part no.: 50116308 – BCL 301i SM 100 – Stationary bar code reader

| RS 485   |   |  |  |  |
|--|---|--|--|--|
| Function   | Process   |  |  |  |
| Transmission speed   | 4,800 115,200 Bd                                  |  |  |  |
| Data format  | Adjustable  |  |  |  |
| Start bit  | 1   |  |  |  |
| Data bit   | 7, 8, 9 data bits                                 |  |  |  |
| Stop bit   | 1, 2 stop bits                                    |  |  |  |
| Parity   | Adjustable  |  |  |  |
| Transmission protocol  | Adjustable  |  |  |  |
| Data encoding  | ASCII   |  |  |  |
|  |   |  |  |  |
| ervice interface   |   |  |  |  |
| уре  | USB   |  |  |  |
| USB  |   |  |  |  |
| Function   | Configuration via software                        |  |  |  |
|  |   |  |  |  |
| connection   |   |  |  |  |
| umber of connections   | 1 Piece(s)  |  |  |  |
| Connection 1   |   |  |  |  |
| Function   | BUS IN  |  |  |  |
|  | BUS OUT<br>Connection to device                   |  |  |  |
|  | Data interface                                    |  |  |  |
|  | PWR / SW IN/OUT<br>Service interface              |  |  |  |
| Type of connection   | Plug connector                                    |  |  |  |
| No. of pins  | 32 -pin   |  |  |  |
| Туре   | Male  |  |  |  |
| Туре   | Wate  |  |  |  |
| lechanical data  |   |  |  |  |
| esign  | Cubic   |  |  |  |
| imension (W x H x L)   | 103 mm x 44 mm x 96 mm                            |  |  |  |
| ousing material  | Metal , Diecast aluminum                          |  |  |  |
| ens cover material   | Glass   |  |  |  |
| et weight  | 350 g   |  |  |  |
| ousing color   | Black   |  |  |  |
|  | Red   |  |  |  |
| ype of fastening   | Dovetail grooves                                  |  |  |  |
|  | Fastening on back<br>Via optional mounting device |  |  |  |
|  |   |  |  |  |
| peration and display   |   |  |  |  |
| ype of display   | LED   |  |  |  |
| umber of LEDs  | 2 Piece(s)  |  |  |  |
| ype of configuration   | Via web browser                                   |  |  |  |
|  |   |  |  |  |
| nvironmental data  |   |  |  |  |
|  | 0 40 °C   |  |  |  |
| mplent temperature, operation                                |   |  |  |  |
| mbient temperature, operation<br>mbient temperature, storage | -20 70 °C   |  |  |  |

Certifications

# Leuze electronic

# Part no.: 50116308 – BCL 301i SM 100 – Stationary bar code reader

| IP 65                                |
|--------------------------------------|
| III                                  |
| c UL US                              |
| EN 55022<br>EN 61000-4-2, -3, -4, -6 |
| IEC 60068-2-27, test Ea              |
| IEC 60068-2-29, test Eb              |
| IEC 60068-2-6, test Fc               |
|                                      |
| 84719000                             |
| 27280102                             |
| 27280102                             |
|                                      |

EC002550


EC002550

## **Dimensioned drawings**

All dimensions in millimeters

ETIM 5.0

ETIM 6.0

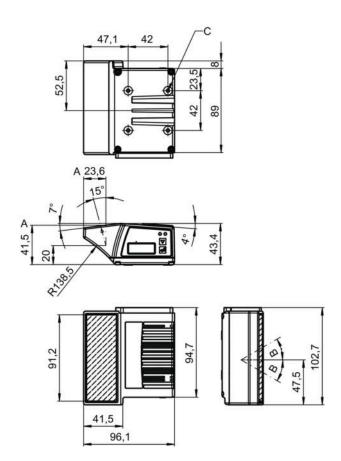

A Optical axis

B Deflection angle of the laser beam:  $\pm$  30  $^{\circ}$ 


C M4 thread (5 deep)

### **Electrical connection**

| Connection 1       |   |
|--------------------|---|
| Function           | BUS IN<br>BUS OUT<br>Connection to device<br>Data interface<br>PWR / SW IN/OUT<br>Service interface |
| Type of connection | Plug connector  |
| No. of pins        | 32 -pin   |
| Туре               | Male  |

## Diagrams

#### Reading field curve

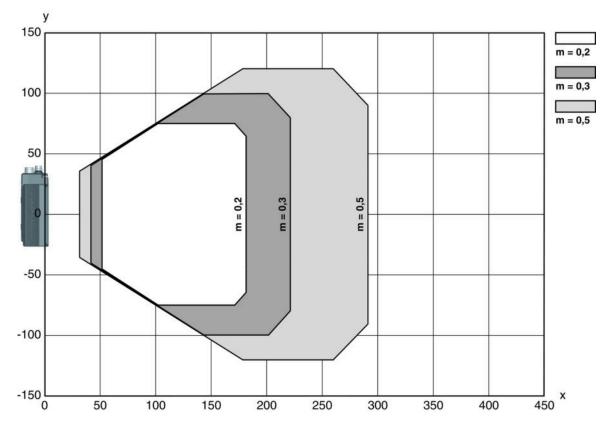

x Reading field distance [mm] y Reading field width [mm]

# **Operation and display**

### LEDs

| LE | LED Display |                         | Meaning                         |  |
|----|-------------|-------------------------|---------------------------------|--|
| 1  | PWR         | Green, flashing         | Device ok, initialization phase |  |
|    |             | Green, continuous light | Device OK                       |  |

# Leuze electronic

## Part no.: 50116308 – BCL 301i SM 100 – Stationary bar code reader

| LED |     | Display                               | Meaning                |  |
|-----|-----|---------------------------------------|------------------------|--|
|     |     | Green, briefly off - on               | Reading successful     |  |
|     |     | green, briefly off - briefly red - on | Reading not successful |  |
|     |     | Orange, continuous light              | Service mode           |  |
|     |     | Red, flashing                         | Device OK, warning set |  |
|     |     | Red, continuous light                 | Error, device error    |  |
| 2   | BUS | Green, flashing                       | Initialization         |  |
|     |     | Green, continuous light               | Bus operation ok       |  |
|     |     | Red, flashing                         | Communication error    |  |
|     |     | Red, continuous light                 | Bus error              |  |

### Part number code

Part designation: BCL XXXX YYZ AAA BB CCCC

| BCL  | Operating principle:<br>BCL: bar code reader  |  |  |  |
|------|---|--|--|--|
| XXXX | Series/interface (integrated fieldbus technology):<br>300i: RS 232 / RS 422 (stand-alone)<br>301i: RS 485 (multiNet slave)<br>304i: PROFIBUS DP<br>308i: EtherNet TCP/IP, UDP<br>348i: PROFINET RT<br>358i: EtherNet/IP |  |  |  |
| ΥY   | Scanning principle:<br>S: line scanner (single line)<br>R1: line scanner (raster)<br>O: oscillating-mirror scanner (oscillating mirror)   |  |  |  |
| Z    | Optics:<br>N: High Density (close)<br>M: Medium Density (medium distance)<br>F: Low Density (remote)<br>L: Long Range (very large distances)<br>J: ink-jet (depending on the application)                               |  |  |  |
| AAA  | Beam exit:<br>100: lateral<br>102: front  |  |  |  |
| BB   | Special equipment:<br>D: with display<br>H: with heating<br>DH: optionally with display and heating<br>P: plastic exit window   |  |  |  |
| CCCC | Functions:<br>F007: optimized process data structure  |  |  |  |

| Note   |
|--|
| A list with all available device types can be found on the Leuze website at www.leuze.com. |

## Notes

#### Observe intended use!

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

# ▲ Leuze electronic

# Part no.: 50116308 - BCL 301i SM 100 - Stationary bar code reader

#### WARNING! LASER RADIATION - CLASS 2 LASER PRODUCT

#### Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24, 2007.

- Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- · Do not point the laser beam of the device at persons!
- Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- · When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- · Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

#### NOTE

#### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

### Accessories

## Connection technology - Connection cables

| Part no. | Designation             | Article          | Description   |
|----------|-------------------------|------------------|---|
| 50135243 | KD PB-M12-4A-<br>P3-050 | Connection cable | Suitable for interface: PROFIBUS DP<br>Connection 1: Connector, M12, Axial, Female, B-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR |
| 50132079 | KD U-M12-5A-<br>V1-050  | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC   |
| 50135248 | KS PB-M12-4A-<br>P3-050 | Connection cable | Suitable for interface: PROFIBUS DP<br>Connection 1: Connector, M12, Axial, Male, B-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR   |

## Connection technology - Interconnection cables

|   |    | Part no.   | Designation                     | Article                  | Description   |
|---|----|------------|---------------------------------|--------------------------|---|
| 5 | C' | 50114571 * | KB 301-3000                     | Interconnection<br>cable | Suitable for interface: RS 232, RS 422, RS 485<br>Connection 1: Socket connector<br>Connection 2: JST ZHR, 10 -pin, 6 -pin<br>Shielded: Yes<br>Cable length: 3,000 mm<br>Sheathing material: PVC  |
|   |    | 50117011   | KB USB A - USB<br>miniB         | Service line             | Suitable for interface: USB<br>Connection 1: USB<br>Connection 2: USB<br>Shielded: Yes<br>Cable length: 1,500 mm<br>Sheathing material: PVC   |
|   |    | 50135254   | KDS PB-M12-4A-<br>M12-4A-P3-050 | Interconnection<br>cable | Suitable for interface: PROFIBUS DP<br>Connection 1: Connector, M12, Axial, Female, B-coded, 2 -pin<br>Connection 2: Connector, M12, Axial, Male, B-coded, 4 -pin<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR |

\* Necessary accessories, please order separately

# Connection technology - Terminating resistors

| Part no. | Designation | Article         | Description   |
|----------|-------------|-----------------|---|
| 50038539 | TS 02-4-SA  | Terminator plug | Suitable for: MultiNet Plus, PROFIBUS DP<br>Connection 1: Connector, M12, Axial, Male, B-coded, 4 -pin<br>Function: Bus termination |

# Mounting technology - Mounting brackets

|           | Part no. | Designation | Article         | Description  |
|-----------|----------|-------------|-----------------|--|
| · · · · · | 50121433 | BT 300 W    | Mounting device | Contains: 4x M4 x 10 screw, 4x position washers, 4x lock<br>washers<br>Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Adjustable<br>Material: Metal |

# Mounting technology - Rod mounts

|          | Part no. | Designation | Article         | Description  |
|----------|----------|-------------|-----------------|--|
| <b>S</b> | 50121435 | BT 56 - 1   | Mounting device | Functions: Static applications<br>Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, For 14 mm rod, For 16<br>mm rod<br>Mounting bracket, at device: Clampable<br>Material: Metal<br>Tightening torque of the clamping jaws: 8 N·m |

## Mounting technology - Other

| Part no. | Designation | Article         | Description  |
|----------|-------------|-----------------|--|
| 50124941 | BTU 0300M-W | Mounting device | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable, Groove mounting,<br>Suited for M4 screws<br>Material: Metal |

# Reflective tapes for standard applications

| Part no. | Designation     | Article         | Description   |
|----------|-----------------|-----------------|---|
| 50106119 | REF 4-A-100x100 | Reflective tape | Design: Rectangular<br>Reflective surface: 100 mm x 100 mm<br>Material: Plastic<br>Chemical designation of the material: PMMA<br>Fastening: Self-adhesive |

## Services

|    | Part no. | Designation | Article  | Description   |
|----|----------|-------------|--|---|
| D- | S981020  | CS30-E-212  | Hourly rate for<br>"Configuration"             | Details: Compilation of the application data, selection and<br>suggestion of suitable sensor system, drawing prepared as<br>assembly sketch.<br>Conditions: Completed questionnaire or project specifications<br>with a description of the application have been provided.<br>Restrictions: Travel and accommodation charged separately<br>and according to expenditure.  |
|    | S981014  | CS30-S-110  | Start-up support                               | Details: Performed at location of customer's choosing, duration:<br>max. 10 hours.<br>Conditions: Devices and connection cables are already<br>mounted, price not including travel costs and, if applicable,<br>accommodation expenses.<br>Restrictions: No mechanical (mounting) and electrical (wiring)<br>work performed, no changes (attachments, wiring,<br>programming) to third-party components in the nearby<br>environment. |
|    | S981019  | CS30-T-110  | Product training                               | Details: Location and content to be agreed upon, duration: max.<br>10 hours.<br>Conditions: Price not including travel costs and, if applicable,<br>accommodation expenses.<br>Restrictions: Travel costs and accommodation expenses<br>charged separately and according to expenditure.  |
|    | S981021  | CS30-V-212  | Hourly rate for<br>"Bar code<br>qualification" | Details: REA evaluation with creation of a test report, evaluation<br>of the code quality.<br>Conditions: Original bar codes to be provided by the client.  |

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.