## **SIEMENS**

## Data sheet

## 3RK1308-0DB00-0CP0

Fail-safe reversing starter electronic switching electr. overload protection up to 0.25 KW/400 V 0.3A to 1A Option: 3DI/LC module PROFIenergy



Figure similar

Product brand name	SIMATIC
Product category	Motor starter
Product type designation	ET 200SP
General technical data	
Equipment variant acc. to IEC 60947-4-2	3
Product function	Fail-safe reversing starter
<ul> <li>on-site operation</li> </ul>	Yes
<ul> <li>Intrinsic device protection</li> </ul>	Yes
<ul> <li>Remote firmware update</li> </ul>	Yes
<ul> <li>for power supply Reverse polarity protection</li> </ul>	Yes
Power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state per pole</li> </ul>	0.02 W
Insulation voltage	
<ul> <li>rated value</li> </ul>	500 V
Degree of pollution	2
Overvoltage category	III
Surge voltage resistance rated value	6 kV

maximum permissible voltage for safe isolation	
between main and auxiliary circuit	500 V
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	15 000 000
Type of assignment	1
Usage category	
• acc. to IEC 60947-4-2	AC53a: 1A: (8-0,7: 70-32)
Equipment marking	
<ul> <li>acc. to DIN 40719 extended according to IEC</li> </ul>	Q
204-2 acc. to IEC 750	
• acc. to DIN EN 61346-2	А
Product function	
• direct start	Yes
<ul> <li>reverse starting</li> </ul>	Yes
Product component Motor brake output	No
Product function Short circuit protection	Yes
Design of short-circuit protection	fuse
Trip class	CLASS 5 and 10 adjustable
Maximum short-circuit current breaking capacity (Icu)	
• at 400 V rated value	55 kA
• at 500 V rated value	55 kA
• at 500 V acc. to UL 60947 rated value	100 kA
Maximum short-circuit current breaking capacity (Icu) in the IT network	
• at 400 V rated value	55 kA
• at 500 V rated value	55 kA
Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	class A
EMI immunity acc. to IEC 60947-1	Class A
Conducted interference	
• due to burst acc. to IEC 61000-4-4	3 kV
<ul> <li>due to conductor-earth surge acc. to IEC</li> <li>61000-4-5</li> </ul>	4 kV
<ul> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	2 KV
<ul> <li>due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	Class A
Field-bound parasitic coupling acc. to IEC 61000-4-3	20 V/m
Electrostatic discharge acc. to IEC 61000-4-2	8 kV air discharge
-	

Conducted HF-interference emissions acc. to CISPR11	Class A for industrial environment
Field-bound HF-interference emission acc. to CISPR11	Class A for industrial environment

Safety related data	
Safety device type acc. to IEC 61508-2	Туре В
B10d value	3 000 000
Safety Integrity Level (SIL) acc. to IEC 61508	3
Performance level (PL) acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
Stop category acc. to DIN EN 60204-1	0
Diagnostics test interval by internal test function maximum	600 s
PFH acc. to IEC 61508 relating to SIL	0.000000036 1/h
PFDavg with low demand rate acc. to IEC 61508	0.0000041
Hardware fault tolerance acc. to IEC 61508	1
Service life maximum	20 у
Safe state	Load circuit open
Protection against electrical shock	finger-safe

Inputs/ Outputs			
umber of digital inputs 5			
Note	4 via 3DI/LC module, 1 F-DI		
<ul> <li>safety-related</li> </ul>	1		
Input voltage at digital input			
• at DC rated value	24 V		
• with signal <0> at DC	0 5 V		
● for signal <1> at DC	15 30		
Input current at digital input			
<ul> <li>for signal &lt;1&gt; typical</li> </ul>	0.009 A		

Despense times			
Response times			
Switch-on delay time	35 ms		
Off-delay time	35 50 ms		
Off-delay time with safety-related request			
<ul> <li>when switched off via control inputs maximum</li> </ul>	55 ms		
<ul> <li>when switched off via supply voltage maximum</li> </ul>	120 ms		
Main circuit			
Number of poles for main current circuit	3		
Design of the switching contact	Hybrid		

Design of the switching contact	Hybrid
Adjustable pick-up value current of the current-	0.3 1 A
dependent overload release	
Minimum load [% of IM]	50 %
Type of the motor protection	solid-state

Operating voltage	
rated value	48 500 V
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative symmetrical tolerance of the operating frequency	5 %
Operating range relative to the operating voltage at AC	
• at 50 Hz	48 500 V
Operating current	
<ul> <li>at AC at 400 V rated value</li> </ul>	1 A
Ampacity when starting maximum	10 A
Operating power for three-phase motors at 400 V at 50 Hz	0.09 0.25 kW
Supply voltage	
Type of voltage of the supply voltage	DC
Supply voltage 1 at DC rated value	
minimum permissible	20.4 V
maximum permissible	28.8 V

24 V

95 mA 160 mA

250 mA

2.3 W

3.8 W

ounting position	Vertical, horizontal, flat (observe derating)
ounting type	pluggable in BaseUnit
leight	142 mm
Width	30 mm
Depth	150 mm
Required spacing	
<ul> <li>with side-by-side mounting</li> </ul>	
— upwards	50 mm
— downwards	50 mm

2 000 m; For derating see manual
-25 +60 °C

Supply voltage at DC rated value

• in standby mode

during operationwhen switching on

Consumed current for rated value of supply voltage

Power loss [W] for rated value of supply voltage

• in switching state OFF with bypass circuit

• in switching state ON with bypass circuit

<ul> <li>during operation maximum</li> </ul>	For derating see manual		
	-40 +70 °C		
during storage			
during transport	-40 +70 °C		
Environmental category during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices)		
Relative humidity during operation	10 95 %		
Air pressure			
• acc. to SN 31205	900 1 060 hPa		
Communication/ Protocol			
Protocol is supported			
PROFIBUS DP protocol	Yes		
PROFINET protocol	Yes		
Product function Bus communication	Yes		
Protocol is supported			
AS-interface protocol	No		
Product function			
<ul> <li>supports PROFlenergy measured values</li> </ul>	Yes		
<ul> <li>supports PROFlenergy shutdown</li> </ul>	Yes		
Address space memory of address range			
• of inputs	4 byte		
• of outputs	2 byte		
Type of electrical connection			
<ul> <li>of the communication interface</li> </ul>	Plug contact to Base Unit		
Connections/Terminals			
Type of electrical connection			
<ul> <li>1 for digital input signals</li> </ul>	Pluggable module - accessory		
<ul> <li>2 for digital input signals</li> </ul>	Plug contact to Base Unit		
Type of electrical connection			
<ul> <li>for main energy infeed</li> </ul>	Plug contact to Base Unit		
<ul> <li>for load-side outgoing feeder</li> </ul>	Plug contact to Base Unit		
<ul> <li>for supply voltage line-side</li> </ul>	Plug contact to Base Unit		
Wire length for motor unshielded maximum	200 m		
UL/CSA ratings			
Full-load current (FLA) for three-phase AC motor			
• at 480 V rated value	1 A		
Current with locked rotor (LRA) for three-phase AC motor at 480 V rated value	8 A		
Operating voltage			
• at AC at 60 Hz acc. to CSA and UL rated value	480 V		
Certificates/approvals			

General Product	t Approval			For use in hazardous locations	Functional Safety/Safety of Machinery
	(SA)		EHC	K ATEX	Type Examination Certificate
Declaration of Conformity	Test Certificates	Shipping Approval		other	
CE	Type Test Certificates/Test Report	HUCAN SURFEE	Lloyd's Register	Confirmation	PROFINET- Certification

LRS

EG-Konf.

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1308-0DB00-0CP0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1308-0DB00-0CP0


ABS

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1308-0DB00-0CP0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1308-0DB00-0CP0&lang=en

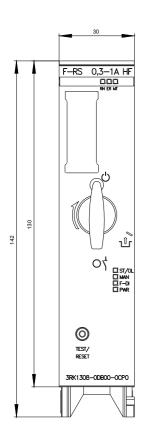

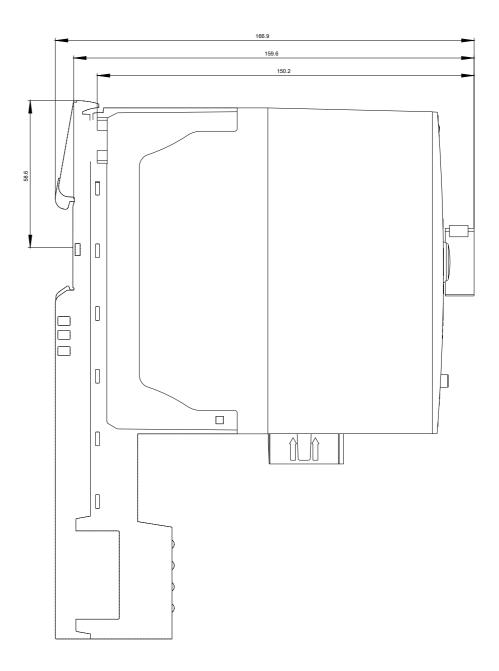

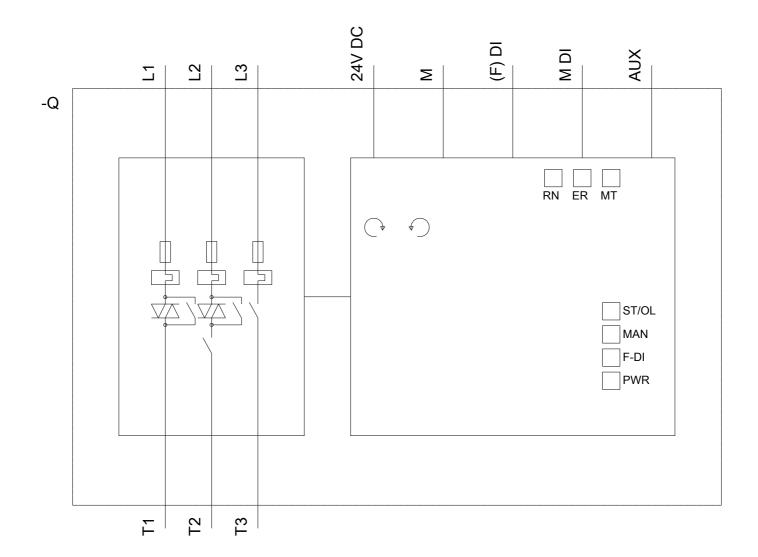

last modified:

10/06/2017