

SHUNT TRIP LEFT 24 V AC 50/60 HZ / 24-30 V DC ACCESSORY  
FOR 3VA1 and 3VA20 up to 3VA25



Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Auxiliary release
Accessories	Auxiliary release
General technical data	
Degree of pollution	3
Overvoltage category	III
Apparent power consumption / maximum	30 V·A
Consumed active power / at DC / maximum	45 W
Voltage	
Rated insulation voltage $U_i$	690 V
Surge voltage resistance	4 kV
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
Number of slots	3
Depth	31.2 mm

Net weight	91 g
Tightening torque / with screw-type terminals / minimum	0.4 N·m
Tightening torque / with screw-type terminals / maximum	0.5 N·m





#### Connections according IEC

Wire stripping length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16

#### Connections according UL

Wire stripping length [in]	0.4 in
Tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
Tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in

#### Certificates

General Product Approval	EMC	Declaration of Conformity	Test Certificates	Shipping Approval
<a href="#">Miscellaneous</a>				
	RCM	EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>	LRS

#### other

[Manufacturer Declaration](#)      [Miscellaneous](#)

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL30>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL30>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9988-0BL30](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL30)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

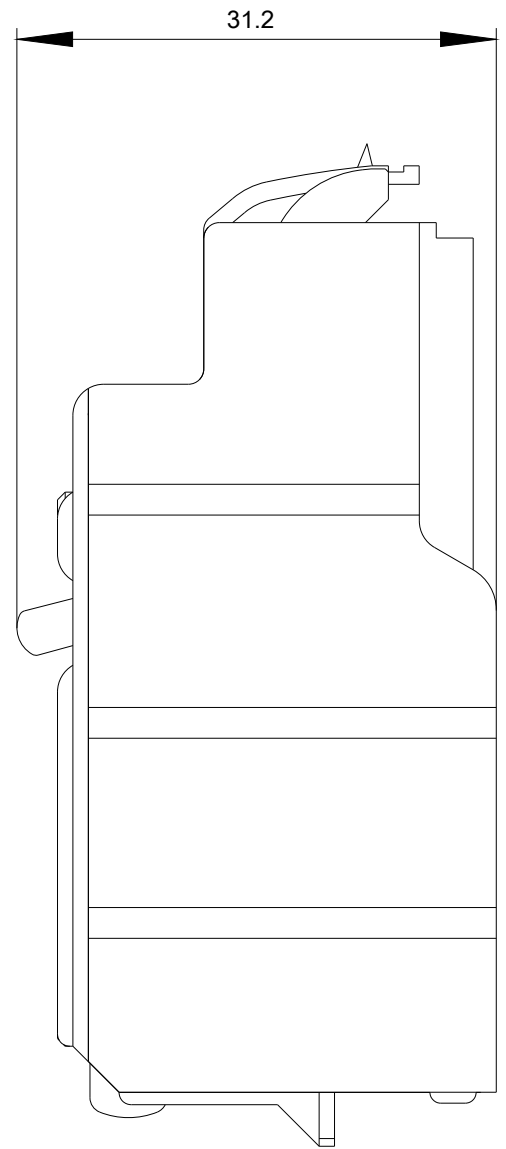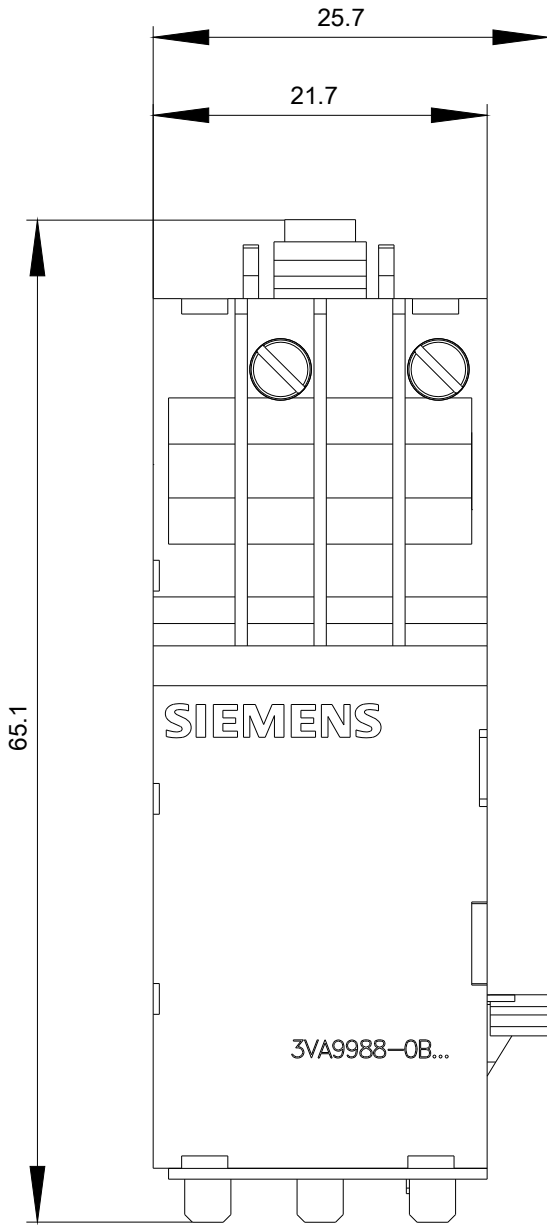

last modified:

02/28/2019