# SMART SENSOR BUSINESS

# Leuze electronic

the sensor people





Part no.: 50141839 BCL 338i R1 F 102 D F007 Stationary bar code reader



Figure can vary

# Contents

- Technical data
- Dimensioned drawings
- · Electrical connection
- Diagrams
- · Operation and display
- · Part number code
- Notes
- Accessories

## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

### **Technical data**

| Basic data  |  |  |  |  |
|---|--|--|--|--|
| Series  | BCL 300i   |  |  |  |
|   |  |  |  |  |
| Functions   |  |  |  |  |
| Functions   | Alignment mode<br>AutoConfig<br>AutoControl<br>AutoReflAct<br>Code fragment technology<br>LED indicator<br>Reference code comparison                                 |  |  |  |
| Characteristic parameters   |  |  |  |  |
| MTTF  | 110 years  |  |  |  |
|   | no years   |  |  |  |
| Devel data  |  |  |  |  |
| Read data   | Q/C Interleaved  |  |  |  |
| Code types, readable  | 2/5 Interleaved<br>Codabar<br>Code 128<br>Code 39<br>Code 93<br>EAN 8/13<br>GS1 Databar Expanded<br>GS1 Databar Limited<br>GS1 Databar Omnidirectional<br>UPC        |  |  |  |
| Scanning rate, typical  | 1,000 scans/s  |  |  |  |
| Bar codes per reading gate, max. number   | 64 Piece(s)  |  |  |  |
| Optical data  | 400 470  |  |  |  |
| Reading distance  | 100 470 mm   |  |  |  |
| Light source  | Laser Red  |  |  |  |
| Lan an Radat concernation with  | Laser, Red   |  |  |  |
| Laser light wavelength  | 655 nm   |  |  |  |
| Laser class   | 655 nm<br>2 , IEC/EN 60825-1:2007  |  |  |  |
| Laser class<br>Transmitted-signal shape   | 655 nm<br>2 , IEC/EN 60825-1:2007<br>Continuous  |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)   | 655 nm<br>2 , IEC/EN 60825-1:2007<br>Continuous<br>60 °  |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size   | 655 nm<br>2 , IEC/EN 60825-1:2007<br>Continuous<br>60 °<br>0.3 0.5 mm  |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection  | 655 nm<br>2 , IEC/EN 60825-1:2007<br>Continuous<br>60 °<br>0.3 0.5 mm<br>Raster scanner<br>Via rotating polygon wheel  |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front  |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)                                 |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm                         |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm   | 655 nm2 , IEC/EN 60825-1:2007Continuous60 °0.3 0.5 mmRaster scannerVia rotating polygon wheelFront8 Piece(s)14 mm24 mm   |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm   24 mm   35 mm         |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm   | 655 nm2 , IEC/EN 60825-1:2007Continuous60 °0.3 0.5 mmRaster scannerVia rotating polygon wheelFront8 Piece(s)14 mm24 mm   |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm   24 mm   35 mm         |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm<br>Scanning field at scanner distance of 300 mm<br>Scanning field at scanner distance of 400 mm   | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm   24 mm   35 mm         |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm<br>Scanning field at scanner distance of 300 mm<br>Scanning field at scanner distance of 400 mm<br><b>Electrical data</b>                       | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm   24 mm   35 mm   45 mm |  |  |  |
| Laser class<br>Transmitted-signal shape<br>Usable opening angle (reading field opening)<br>Modulus size<br>Reading method<br>Beam deflection<br>Light beam exit<br>Raster (number of lines)<br>Scanning field at scanner distance of 100 mm<br>Scanning field at scanner distance of 200 mm<br>Scanning field at scanner distance of 300 mm<br>Scanning field at scanner distance of 400 mm<br><b>Electrical data</b><br>Protective circuit | 655 nm   2 , IEC/EN 60825-1:2007   Continuous   60 °   0.3 0.5 mm   Raster scanner   Via rotating polygon wheel   Front   8 Piece(s)   14 mm   24 mm   35 mm   45 mm |  |  |  |

## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

| Inputs/outputs selectable  |   |  |  |  |
|--|---|--|--|--|
| Output current, max.   | 60 mA   |  |  |  |
| Number of inputs/outputs selectable  | 2 Piece(s)  |  |  |  |
| Input current, max.  | 8 mA  |  |  |  |
|  |   |  |  |  |
| nterface   |   |  |  |  |
| уре  | EtherCAT  |  |  |  |
| EtherCAT   |   |  |  |  |
| Function   | Process   |  |  |  |
| Transmission protocol  | EtherCAT, CoE and EoE   |  |  |  |
|  |   |  |  |  |
| ervice interface   |   |  |  |  |
| уре  | USB   |  |  |  |
| USB  |   |  |  |  |
| Function   | Configuration via software  |  |  |  |
|  | Service   |  |  |  |
|  |   |  |  |  |
| Connection   |   |  |  |  |
| lumber of connections  | 1 Piece(s)  |  |  |  |
| Connection 1   |   |  |  |  |
| Function   | BUS IN<br>BUS OUT   |  |  |  |
|  | Connection to device  |  |  |  |
|  | Data interface  |  |  |  |
|  | PWR / SW IN/OUT<br>Service interface  |  |  |  |
| Type of connection   | Plug connector  |  |  |  |
| No. of pins  | 32 -pin   |  |  |  |
| Туре   | Male  |  |  |  |
|  |   |  |  |  |
| lechanical data  |   |  |  |  |
| lesign   | Cubic   |  |  |  |
| imension (W x H x L)   | 95 mm x 44 mm x 68 mm   |  |  |  |
| lousing material   | Metal , Diecast aluminum  |  |  |  |
| ens cover material   | Glass   |  |  |  |
| let weight   |   |  |  |  |
| ier neight   | 270 g   |  |  |  |
| lousing color  | Black   |  |  |  |
| lousing color  | Black<br>Red  |  |  |  |
|  | Black<br>Red<br>Dovetail grooves  |  |  |  |
| lousing color  | Black<br>Red  |  |  |  |
| lousing color<br>ype of fastening  | Black<br>Red<br>Dovetail grooves<br>Fastening on back   |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display   | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device   |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display   | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>LED<br>Monochromatic graphic display, 128 x 32 pixels                               |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs   | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>Monochromatic graphic display, 128 x 32 pixels<br>2 Piece(s)                        |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs<br>ype of configuration                         | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>Monochromatic graphic display, 128 x 32 pixels<br>2 Piece(s)<br>Via web browser     |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs   | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>Monochromatic graphic display, 128 x 32 pixels<br>2 Piece(s)                        |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs<br>ype of configuration<br>Operational controls | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>Monochromatic graphic display, 128 x 32 pixels<br>2 Piece(s)<br>Via web browser     |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs<br>ype of configuration<br>Operational controls | Black   Red   Dovetail grooves   Fastening on back   Via optional mounting device   LED   Monochromatic graphic display, 128 x 32 pixels   2 Piece(s)   Via web browser   Button(s) |  |  |  |
| lousing color<br>ype of fastening<br>Operation and display<br>ype of display<br>lumber of LEDs<br>ype of configuration<br>Operational controls | Black<br>Red<br>Dovetail grooves<br>Fastening on back<br>Via optional mounting device<br>LED<br>Monochromatic graphic display, 128 x 32 pixels<br>2 Piece(s)<br>Via web browser     |  |  |  |

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199


## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader


| Certifications  |                                      |
|---|--------------------------------------|
| Degree of protection  | IP 65                                |
| Protection class  | III                                  |
| Certifications  | c UL US                              |
| Test procedure for EMC in accordance with standard              | EN 55022<br>EN 61000-4-2, -3, -4, -6 |
| Test procedure for shock in accordance with standard            | IEC 60068-2-27, test Ea              |
| Test procedure for continuous shock in accordance with standard | IEC 60068-2-29, test Eb              |
| Test procedure for vibration in accordance with standard        | IEC 60068-2-6, test Fc               |

| Classification        |          |
|-----------------------|----------|
| Customs tariff number | 84719000 |
| eCl@ss 8.0            | 27280102 |
| eCl@ss 9.0            | 27280102 |
| ETIM 5.0              | EC002550 |
| ETIM 6.0              | EC002550 |

### **Dimensioned drawings**

All dimensions in millimeters

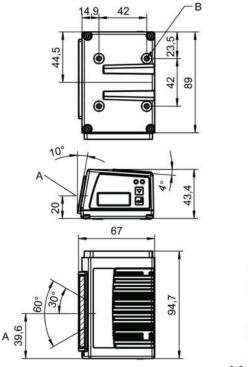




A Optical axis B M4 thread (5 deep) Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

### **Electrical connection**

| Connection 1       |   |
|--------------------|---|
| Function           | BUS IN<br>BUS OUT<br>Connection to device<br>Data interface<br>PWR / SW IN/OUT<br>Service interface |
| Type of connection | Plug connector  |
| No. of pins        | 32 -pin   |
| Туре               | Male  |

## Diagrams

## Reading field curve

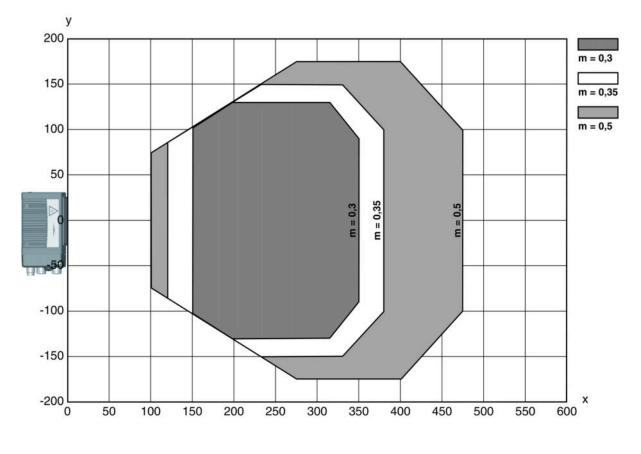

x Reading field distance [mm] y Reading field width [mm]

## **Operation and display**

### LEDs

| L | ED  | Display                 | Meaning                         |  |
|---|-----|-------------------------|---------------------------------|--|
| 1 | PWR | Green, flashing         | Device ok, initialization phase |  |
|   |     | Green, continuous light | Device OK                       |  |

## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

| LED | Display               |                                       | Meaning                |  |
|-----|-----------------------|---------------------------------------|------------------------|--|
|     |                       | Green, briefly off - on               | Reading successful     |  |
|     |                       | green, briefly off - briefly red - on | Reading not successful |  |
|     |                       | Orange, continuous light              | Service mode           |  |
|     |                       | Red, flashing                         | Device OK, warning set |  |
|     | Red, continuous light |                                       | Error, device error    |  |
| 2   | BUS                   | Green, flashing                       | Initialization         |  |
|     |                       | Green, continuous light               | Bus operation ok       |  |
|     |                       | Red, flashing                         | Communication error    |  |
|     |                       | Red, continuous light                 | Bus error              |  |

### Part number code

Part designation: BCL XXXX YYZ AAA BB CCCC

| BCL  | Operating principle:<br>BCL: bar code reader  |
|------|---|
| XXXX | Series/interface (integrated fieldbus technology):<br>300i: RS 232 / RS 422 (stand-alone)<br>301i: RS 485 (multiNet slave)<br>304i: PROFIBUS DP<br>308i: EtherNet TCP/IP, UDP<br>348i: PROFINET RT<br>358i: EtherNet/IP |
| ΥY   | Scanning principle:<br>S: line scanner (single line)<br>R1: line scanner (raster)<br>O: oscillating-mirror scanner (oscillating mirror)   |
| Z    | Optics:<br>N: High Density (close)<br>M: Medium Density (medium distance)<br>F: Low Density (remote)<br>L: Long Range (very large distances)<br>J: ink-jet (depending on the application)                               |
| AAA  | Beam exit:<br>100: lateral<br>102: front  |
| BB   | Special equipment:<br>D: with display<br>H: with heating<br>DH: optionally with display and heating<br>P: plastic exit window   |
| CCCC | Functions:<br>F007: optimized process data structure  |

| Note   |
|--|
| A list with all available device types can be found on the Leuze website at www.leuze.com. |

## Notes

#### Observe intended use!

- This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- Only use the product in accordance with its intended use.

### Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

#### WARNING! LASER RADIATION - CLASS 2 LASER PRODUCT

#### Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to "Laser Notice No. 50" from June 24, 2007.

- Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- · Do not point the laser beam of the device at persons!
- Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- · When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- · Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

#### NOTE

#### Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

### Accessories

## Connection technology - Connection cables

| Part no. | Designation             | Article          | Description  |
|----------|-------------------------|------------------|--|
| 50132079 | KD U-M12-5A-<br>V1-050  | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC                                    |
| 50135074 | KS ET-M12-4A-<br>P7-050 | Connection cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: Open end<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR |

## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

## Connection technology - Interconnection cables

|  | Part no. | Designation                     | Article                  | Description  |
|--|----------|---------------------------------|--------------------------|--|
|  | 50117011 | KB USB A - USB<br>miniB         | Service line             | Suitable for interface: USB<br>Connection 1: USB<br>Connection 2: USB<br>Shielded: Yes<br>Cable length: 1,500 mm<br>Sheathing material: PVC  |
|  | 50137078 | KSS ET-M12-4A-<br>M12-4A-P7-050 | Interconnection<br>cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Shielded: Yes<br>Cable length: 1,000 mm<br>Sheathing material: PUR |
|  | 50135081 | KSS ET-M12-4A-<br>RJ45-A-P7-050 | Interconnection<br>cable | Suitable for interface: Ethernet<br>Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin<br>Connection 2: RJ45<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR   |

# Mounting technology - Mounting brackets

| Part  | rt no.  | Designation | Article | Description  |
|-------|---------|-------------|---------|--|
| 50121 | 21433 B | 3T 300 W    | C C     | Contains: 4x M4 x 10 screw, 4x position washers, 4x lock<br>washers<br>Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Adjustable<br>Material: Metal |

# Mounting technology - Rod mounts

|   | Part no. | Designation | Article | Description  |
|---|----------|-------------|---------|--|
| T | 50121435 | BT 56 - 1   |         | Functions: Static applications<br>Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, For 14 mm rod, For 16<br>mm rod<br>Mounting bracket, at device: Clampable<br>Material: Metal<br>Tightening torque of the clamping jaws: 8 N·m |

## Mounting technology - Other

| Part no. | Designation | Article         | Description  |
|----------|-------------|-----------------|--|
| 50124941 | BTU 0300M-W | Mounting device | Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Clampable, Groove mounting,<br>Suited for M4 screws<br>Material: Metal |

## Part no.: 50141839 – BCL 338i R1 F 102 D F007 – Stationary bar code reader

# Reflective tapes for standard applications

| Part no. | Designation     | Article         | Description   |
|----------|-----------------|-----------------|---|
| 50106119 | REF 4-A-100x100 | Reflective tape | Design: Rectangular<br>Reflective surface: 100 mm x 100 mm<br>Material: Plastic<br>Chemical designation of the material: PMMA<br>Fastening: Self-adhesive |

## Services

|        | Part no. | Designation | Article  | Description   |
|--------|----------|-------------|--|---|
| ₽<br>© | S981020  | CS30-E-212  | Hourly rate for<br>"Configuration"             | Details: Compilation of the application data, selection and<br>suggestion of suitable sensor system, drawing prepared as<br>assembly sketch.<br>Conditions: Completed questionnaire or project specifications<br>with a description of the application have been provided.<br>Restrictions: Travel and accommodation charged separately<br>and according to expenditure.  |
|        | S981014  | CS30-S-110  | Start-up support                               | Details: Performed at location of customer's choosing, duration:<br>max. 10 hours.<br>Conditions: Devices and connection cables are already<br>mounted, price not including travel costs and, if applicable,<br>accommodation expenses.<br>Restrictions: No mechanical (mounting) and electrical (wiring)<br>work performed, no changes (attachments, wiring,<br>programming) to third-party components in the nearby<br>environment. |
|        | S981019  | CS30-T-110  | Product training                               | Details: Location and content to be agreed upon, duration: max.<br>10 hours.<br>Conditions: Price not including travel costs and, if applicable,<br>accommodation expenses.<br>Restrictions: Travel costs and accommodation expenses<br>charged separately and according to expenditure.  |
|        | S981021  | CS30-V-212  | Hourly rate for<br>"Bar code<br>qualification" | Details: REA evaluation with creation of a test report, evaluation<br>of the code quality.<br>Conditions: Original bar codes to be provided by the client.  |

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.