Vision Sensor

B50S011

Part Number



Image processing functions

MultiCore technology

The vision sensor weQubeVision is based on the wenglor MultiCore technology. The functions region of interest and tracking ensure optimal object detection. The following image processing modules are available: Dimensional accuracy check, sorting procedures, presence control, object counting, position output, pixel counting, filter options, and statistics evaluation. Thanks to the integrated color image chip, all image processing functions are also available for remote applications.

Technical Data

Optical Data					
Lens thread	C-Mount				
Resolution	736 × 480 Pixel				
Image Chip	color				
Image chip size	1/3"				
Pixel Size	6 × 6 µm				
Service Life (T = +25 °C)	100000 h				
Frame Rate	15 Hz				
Electrical Data					
Supply Voltage	1830 V DC				
Current Consumption (Ub = 24 V)	< 200 mA				
Response Time	66 ms				
Temperature Range	-2555 °C*				
Inputs/Outputs	6				
Switching Output Voltage Drop	< 2,5 V				
Switching Output/Switching Current	100 mA				
Short Circuit Protection	yes				
Reverse Polarity Protection	yes				
Interface	RS-232/Ethernet				
Protection Class	III				
Mechanical Data					
Setting Method	Ethernet				
Housing Material	Aluminum				
Degree of Protection	IP67				
Connection	M12 × 1; 12-pin				
Type of Connection Ethernet	M12 × 1; 8-pin, X-cod.				
Safety-relevant Data	·				
MTTFd (EN ISO 13849-1)	263,03 a				
Function					
Presence Check	yes				
Pixel Comparison	yes				
Reference Image Comparison	yes				
Tracking	yes				
Object detection	yes				
Dimensional accuracy check	yes				
Web server	yes				
Configurable as PNP/NPN/Push-Pull					
Switchable to NC/NO	Ă				
Illumination Output					
RS-232 Interface	ě				
Ethernet					
Connection Diagram No.	002 1008				
Control Panel No.	X2				
Suitable Connection Equipment No.	50 87				
Suitable Mounting Technology No.	560				
Display brightness may decrease with age. This does not result in	n any impairment of the				

Display brightness may decrease with age. This does not result in any impairment of the sensor function. * -25° C: Ambient conditions should not result in condensation; avoid the formation of ice on

the front panel! 55° C: Continuous illumination at max. 1% or flash mode at 100% brightness with an


exposure time of ≤ 5 ms; may affect the service life of the product.


Complementary Products


Illumination Technology
Lens
License Upgrade, weQube Pattern Matching DNNL006
Protective Housing ZSZ-0x-01
Software
weQubeDecode License Upgrade DNNL002
weQubeOCR License Upgrade DNNL003
Protective Housing ZSZ-0x-01 Software weQubeDecode License Upgrade DNNL002

weQubeVision



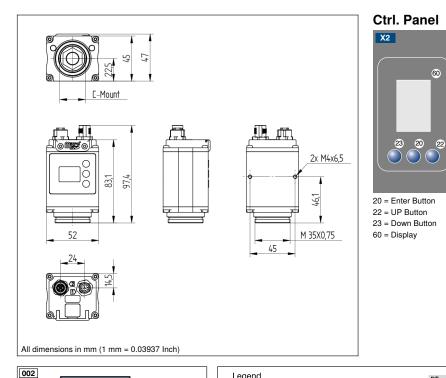





Legend			PŤ	Platinum measuring resistor	EN	VAR5422	Encoder A/Ā (TTL)
+	Supply Voltage +		nc	not connected	EN	VBR5422	Encoder B/B (TTL)
-	Supply Voltage 0 V		υ	Test Input	EN	NA	Encoder A
~	Supply Voltage (AC Voltage)		Ū	Test Input inverted	EN	Νв	Encoder B
А	Switching Output (NO)		W	Trigger Input	AN	MIN	Digital output MIN
Ā	Switching Output (NC)		W –	Ground for the Trigger Input	AM	XAN	Digital output MAX
V	Contamination/Error Output (NO)		0	Analog Output	Ac	ж	Digital output OK
V	Contamination/Error Output (NC)		0-	Ground for the Analog Output	SY	r In	Synchronization In
E	Input (analog or digital)		BZ	Block Discharge	SY	(OUT	Synchronization OUT
Т	Teach Input		Awv	Valve Output	Ou	.T	Brightness output
Z	Time Delay (activation)		а	Valve Control Output +	м		Maintenance
S	Shielding		b	Valve Control Output 0 V	rs	v	reserved
RxD	Interface Receive Path		SY	Synchronization	W	ire Co	ors according to DIN IEC 757
TxD	Interface Send Path		SY-	Ground for the Synchronization	B	ΚI	Black
RDY	Ready		E+	Receiver-Line	B	N	Brown
GND	Ground		S+	Emitter-Line	R	D	Red
CL	Clock		÷	Grounding	0	G	Orange
E/A	Output/Input programmable		SnR	Switching Distance Reduction	Y	Έ	Yellow
۲	IO-Link		Rx+/-	Ethernet Receive Path	G	iN	Green
PoE	Power over Ethernet		Tx+/-	Ethernet Send Path	B	υı	Blue
IN	Safety Input		Bus	Interfaces-Bus A(+)/B(-)	V		Violet
OSSD	Safety Output		La	Emitted Light disengageable	G	iY i	Grey
Signal	Signal Output		Mag	Magnet activation	N	VH 1	White
BI_D+/-	Ethernet Gigabit bidirect. data line (/	4-D)	RES	Input confirmation	PI		Pink
ENO RS42	Encoder 0-pulse 0-0 (TTL)		EDM	Contactor Monitoring	G	NYE	Green/Yellow

