

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/10ADC


Current: 10 A

Output rating: 240 W


This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)

Illustration

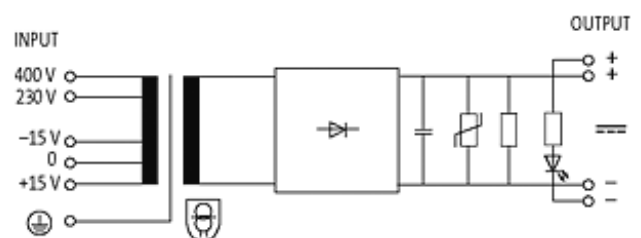

stay connected

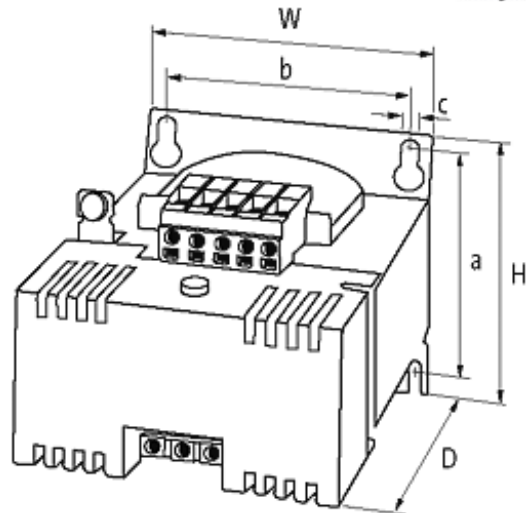

Product may differ from Image

Approvals



Input

| | |
|-----------------------|---------------------------------------|
| Input voltage | 230/400 ±15 V AC |
| Input current | 1.7 A (230 V AC); 0.97 A (400 V AC) |
| Input fuse (external) | 3.15 AT (230 V AC); 1.6 AT (400 V AC) |
| Frequency | 50...60 Hz |

General data

| | |
|--------------------------|---|
| Standards | (EN 61558-2-6), (EN 62041 category I), (EN 55011 B), (EN 61000-3-2) |
| Mounting method | Key-hole mounting |
| Dimensions H × W × D | 112.5×120×160 mm |
| Fixing centers a × b × c | 94.5×90×5.8 mm |
| Temperature range | -20...+60 °C, no condensation |

Output

| | |
|------------------------------|---------------------------------------|
| Output voltage | 24 V DC (SELV) |
| Output current (Ta 60/40 °C) | max. 10 A (230 V AC); 12 A (400 V AC) |
| Ripple | max. 5 %rms |
| Output fuse | 20 A (automotive fuse FKS) |
| Output filter | LED, VDR and smoothing capacitor |

Commercial data

| | |
|------------------------|----------|
| country of origin | CZ |
| customs tariff number | 85044090 |
| minimum order quantity | 1 |