## **SIEMENS**

#### Data sheet

### 3RA2110-0CH15-1AP0



LOAD FEEDER FUSELESS DIRECT START, AC 400V, SZ S00 0.18. . . 0.25A, AC 230V SPRING-LOADED CONNECTION FOR BUSBAR SYSTEMS 60MM TYPE OF COORDINATION 2, IQ = 150KA (ALSO FULFILLS TYPE OF COORDINATION 1) 1NO (CONTACTOR)

product brand name	SIRIUS
Product designation	non-fused load feeders 3RA2
Manufacturer article number	
<ul> <li>of the supplied contactor</li> </ul>	3RT2015-2AP01
<ul> <li>of the supplied circuit-breakers</li> </ul>	3RV2011-0CA20
<ul> <li>of the supplied busbar adapter</li> </ul>	<u>8US1251-5DT11</u>
• of the supplied link module	3RA2911-2AA00

General technical data:				
Insulation voltage				
<ul> <li>with degree of pollution 3 Rated value</li> </ul>	V	690		
Shock resistance				
• acc. to IEC 60068-2-27		6g / 11 ms		
Surge voltage resistance Rated value	kV	6		
Type of assignment		2		
Protection class IP				
• on the front		IP20		

Main circuit:				
Number of poles for main current circuit		3		
Adjustable response value current of the current-	Α	0.18 0.25		
dependent overload release				
Operating voltage				
Rated value	V	690		
<ul> <li>at AC-3 Rated value maximum</li> </ul>	V	690		
Operating frequency Rated value	Hz	50 60		
Operating current				

• at AC-3		
— at 400 V Rated value	Α	0.2
Operating power		
• at AC-3		
— at 400 V Rated value	W	60
— at 500 V Rated value	W	60
— at 690 V Rated value	W	90
Control circuit/ Control:		
Control supply voltage with AC		
● at 50 Hz Rated value	V	230
● at 60 Hz Rated value	V	230
Apparent holding power of the magnet coil with AC	V·A	4.2
Auxiliary circuit:		
Product expansion Auxiliary switch		Yes
Protective and monitoring functions:		
Trip class		CLASS 10
Design of the overload circuit breaker		thermal (bimetallic)
UL/CSA ratings:		
Full-load current (FLA) for three-phase AC motor		0.05
● at 480 V Rated value	Α	0.25
Short-circuit:		
Product function Short circuit protection		Yes
Design of the short-circuit trip		magnetic
Conditional short-circuit current (Iq)		
• at 690 V acc. to IEC 60947-4-1 Rated value	Α	100 000
• at 400 V acc. to IEC 60947-4-1 Rated value	Α	153 000
• at 500 V acc. to IEC 60947-4-1 Rated value	Α	100 000
Installation/ mounting/ dimensions:		
mounting position		vertical
Mounting type		for snapping onto 60 mm busbar systems
Height	mm	260
Width	mm	45
Depth	mm	155.1
Required spacing		
• for grounded parts		
— forwards	mm	0
— Backwards	mm	0
— upwards	mm	20
— at the side	mm	9
— downwards	mm	10

• for live parts			
— forwards	mm	0	
— Backwards	mm	0	
— upwards	mm	20	
— downwards	mm	10	
— at the side	mm	9	
Connections/ Terminals:			
Type of electrical connection			
• for main current circuit		spring-loaded terminals	
Safety related data:			
B10 value with high demand rate acc. to SN 31920		1 000 000	
Proportion of dangerous failures			
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	%	73	
Protection against electrical shock		finger-safe	
Mechanical data:			
Size of the circuit-breaker		S00	
Size of load feeder		S00	
Ambient conditions:			
Ambient temperature			
<ul><li>during operation</li></ul>	°C	-20 +60	
during storage	°C	-50 <b>+</b> 80	
during transport	°C	-50 <b>+</b> 80	
Certificates/ approvals:			

# General Product Approval For use in hazardous Conformity Certificates locations











Declaration of the Compliance with the order

#### **Test Certificates**

#### **Shipping Approval**

Special Test Certificate Type Test
Certificates/Test
Report









GL

#### **Shipping Approval**

#### other





Environmental Confirmations

Declaration of Conformity

other

#### Further informatior

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrymall

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA21100CH151AP0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RA21100CH151AP0/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RA21100CH151AP0&lang=en

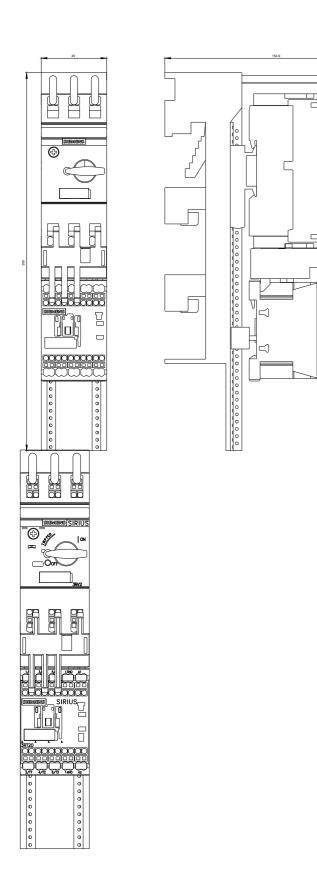

DIEREDATANICA ERABIZADEO G, SIGRESOLONGSL.



DOPAEDCHESEIDAERT FANS MIDENS SSZ S00

last modified: 11.03.2015