
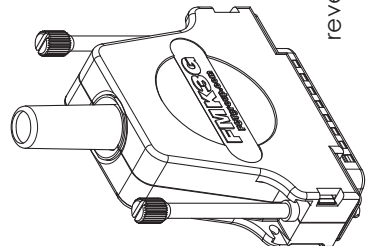


Order-No.	Shell Size / for No. of Contacts	B	C	D	E	∅F1 min - max	max I Rubber bushing	∅F2 Rubber bushing	H	U	V	W
FMK1G-09P-3360	1 / 9	±0.1	±0.3	±0.3	±0.3	3 - 9.5	6.5	FKT1-2	42	±0.4	±0.15	±0.2
FMK2G-15P-3360	2 / 15	25	31.6	39.5	15.2	3 - 8.5	6.5	FKT1-2	43.5	30.8	25	16.9
FMK3G-25P-3360	3 / 25	33.3	40	41	15.2	3 - 8.5	6.5	FKT1-2	47.5	39.1	33.3	25.2
FMK4G-37P-3360	4 / 37	47.04	53.7	45	15.2	3 - 8.5	8	FKT1-2A	50.5	53	47.04	38.9
		63.5	70.2	48	18.2	3 - 12	9	FKT3-4		69.3	63.5	55.3

# FMKYG-xxP-3360

e.g. FMK3G-25P-3360

\*1) Y for hood size 1, 2, 3 or 4  
\*2) xx No. of contacts 09, 15, 25 or 37

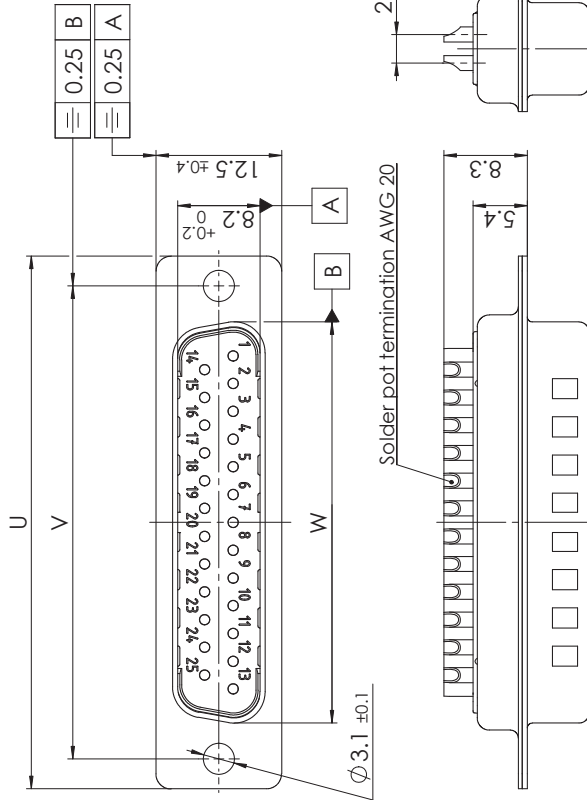


reverse side  
1 : 1

RoHS compliant

max. torque are 40 Ncm  
FMK1G-09P-3360 without Part-No. 7  
Part-No. 9 not mounted

∅F1 = Cable diameter without rubber bushing  
∅F2 = Cable diameter with rubber bushing

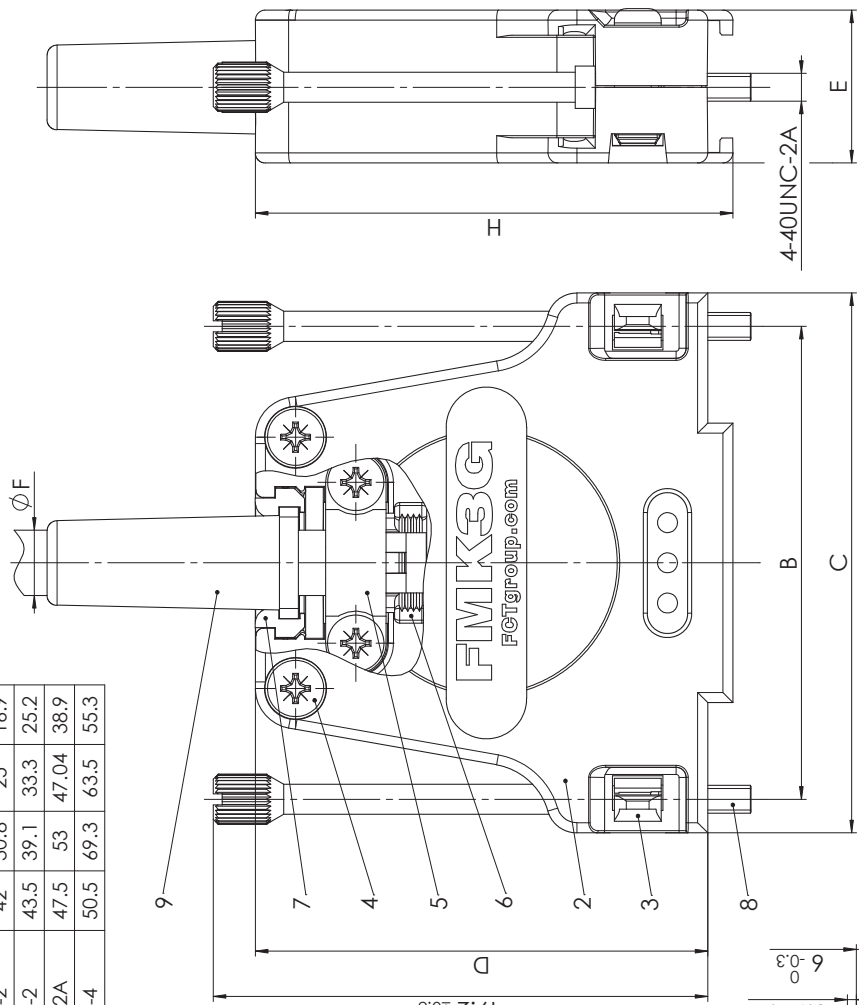

No.	Part	Type	Material
9	Rubber bushing	TPE	black
8	Knurled thumb screw	FRS1/5-K190 4-40 / Brass	nickel plated
7	Cable reduction plate	Zinc die-cast	nickel plated
6	Strain relief	ABS	nickel plated
5	Cable clamp	Steel	tin plated
4	Screw	Case hardened steel	zinc plated
3	Catch spring	PEI	black
2	Hood	FMKYG / Zinc die-cast	nickel plated
1	D-Sub Connector	FxxP0G2	Surface plating/Colour/Class

No. St. Part		Type Description/Material	SCALE	TITLE
			2:1	Hood Connector Set
DRAWN		AMEYENRICHE		
CHECKED		AMEYENRICHE		
DATE		22060		
REV.		DATE	CH.-NO.	REPLACEMENT FOR:
2	07-09-2016	22060		ORIGINAL: DN A3-DRAWING AS A FILE
1				
DWG. NO.		FMKYG-xxP-3360		
REV.		2		
PAGES		1		