SMART SENSOR BUSINESS

Leuze electronic

the sensor people



Part no.: 68007216 MLC510R20-1650/A Safety light curtain receiver



Figure can vary

Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- · Operation and display
- Suitable transmitters
- Part number code
- Notes
- Accessories

Leuze electronic

Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver

Technical data

| Basic data | |
|--|---|
| Series | MLC 500 |
| Device type | Receiver |
| Contains | 2x BT-NC sliding block |
| Application | Hand protection |
| | |
| Characteristic parameters | |
| Туре | 4 , IEC/EN 61496 |
| SIL | 3 , IEC 61508 |
| SILCL | 3 , IEC/EN 62061 |
| Performance Level (PL) | e , EN ISO 13849-1 |
| PFHD | 7.73E-09 per hour |
| Mission time T _M | 20 years , EN ISO 13849-1 |
| Category | 4 , EN ISO 13849 |
| | |
| Protective field data | |
| Resolution | 20 mm |
| Protective field height | 1,650 mm |
| | |
| Optical data | |
| Synchronization | Optical between transmitter and receiver |
| | |
| Electrical data | |
| Protective circuit | Overvoltage protection Short circuit protected |
| Performance data | |
| Supply voltage UB | 26.5 31.6 V |
| Current consumption from AS-i circuit | 150 mA |
| | 100 11/4 |
| Timing | |
| Response time | 29 ms |
| Restart delay time | 100 ms |
| | |
| Interface | |
| Туре | AS-Interface Safety at Work |
| AS-i | • |
| Function | Process |
| AS-i profile | S-0.B.F |
| Slave address | 131 programmable, default=0 |
| Cycle time acc. to AS-i specifications | Max. 5 ms |
| | |
| Connection | |
| Number of connections | 1 Piece(s) |
| | |

Leuze electronic

Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver


| Connection 1 | | | |
|--|---|--|--|
| Type of connection | Connector | | |
| Function | Machine interface | | |
| Thread size | M12 | | |
| Material | Metal | | |
| No. of pins | 5 -pin | | |
| Cable properties | | | |
| Permissible conductor cross section, typ. | 0.25 mm ² | | |
| Length of connection cable, max. | 100 m | | |
| Permissible cable resistance to load, max. | 200 Ω | | |
| · · · · · · · · · · · · · · · · · · · | | | |
| Nechanical data | | | |
| Dimension (W x H x L) | 29 mm x 1,716 mm x 35.4 mm | | |
| Housing material | Metal , Aluminum | | |
| ens cover material | Plastic / PMMA | | |
| Naterial of end caps | Diecast zinc | | |
| Net weight | 1,800 g | | |
| Housing color | Yellow, RAL 1021 | | |
| Type of fastening | Groove mounting | | |
| | Mounting bracket Mounting on Device Column | | |
| | Swivel mount | | |
| | | | |
| Operation and display | | | |
| Type of display | LED | | |
| Number of LEDs | 2 Piece(s) | | |
| | | | |
| Environmental data | | | |
| Ambient temperature, operation | 0 55 °C | | |
| Ambient temperature, storage | -30 70 °C | | |
| Relative humidity (non-condensing) | 0 95 % | | |
| | | | |
| Certifications | | | |
| Degree of protection | IP 65 | | |
| Protection class | III | | |
| Certifications | c CSA US c TÜV NRTL US | | |
| | TÜV Süd | | |
| /ibration resistance | 50 m/s² | | |
| Shock resistance | 100 m/s² | | |
| JS patents | US 6,418,546 B | | |
| | | | |
| Classification | | | |
| Customs tariff number | 85365019 | | |
| eCl@ss 8.0 | 27272704 | | |
| eCl@ss 9.0 | 27272704 | | |
| ETIM 5.0 | EC002549 | | |
| ETIM 6.0 | EC002549 | | |
| | | | |

Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver

Dimensioned drawings

All dimensions in millimeters

Calculation of the effective protective field height HPFE = HPFN + B + C

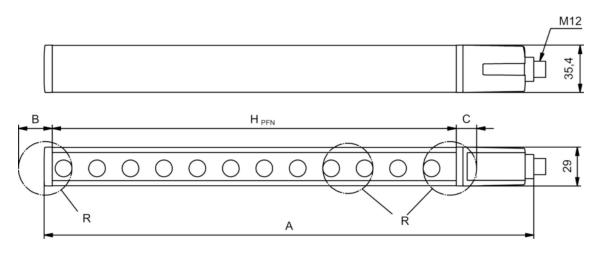


HPFE Effective protective field height = 1667 mm

- HPFN Nominal protective field height = 1650 mm
- A Total height = 1716 mm
- B 7 mm
- C 10 mm
- R Effective protective field height HPFE goes beyond the dimensions of the optics area to the outer borders of the circles labeled with R.

Electrical connection

| Connection 1 | |
|--------------------|-------------------|
| Type of connection | Connector |
| Function | Machine interface |
| Thread size | M12 |
| Туре | Male |
| Material | Metal |
| No. of pins | 5 -pin |
| Encoding | A-coded |

| Pin | Pin assignment |
|-----|----------------|
| 1 | AS-i+ |
| 2 | n.c. |
| 3 | AS-i- |
| 4 | n.c. |
| 5 | n.c. |



Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver

Operation and display

LEDs

| LED | Display | Meaning | |
|-----|---------------------------------|--|--|
| 1 | Off | Device switched off | |
| | Red, continuous light | Protective field interrupted | |
| | Red, flashing, 1 Hz | External error | |
| | Red, flashing, 10 Hz | Internal error | |
| | Green, flashing, 1 Hz | Protective field free, weak signal | |
| | Green, continuous light | Protective field free | |
| 2 | Off | No voltage | |
| | On | OSSD off, transmission channel C2 | |
| | Green, continuous light | AS-i slave communicating with AS-i master | |
| | Red, continuous light | AS-i slave not communicating with AS-i master | |
| | Yellow, flashing | AS-i slave has invalid address 0 | |
| | Red, flashing | AS-i slave device error or AS-i connection defective | |
| | Red/green, flashing alternately | Periphery error | |

Suitable transmitters

| | Part no. | Designation | Article | Description |
|---|----------|----------------------|-------------|--|
| 6 | 58006216 | MLC500T20-1650/ A | transmitter | Resolution: 20 mm Protective field height: 1,650 mm Operating range: 0 15 m Interface: AS-Interface Safety at Work Connection: Connector, M12, Metal, 5 -pin |

Part number code

Part designation: MLCxyy-za-hhhhei-ooo

| MLC | Safety light curtain | | | |
|------|--|--|--|--|
| х | Series: 3: MLC 300 5: MLC 500 | | | |
| уу | Function classes: 00: transmitter 01: transmitter (AIDA) 02: transmitter with test input 10: basic receiver - automatic restart 11: basic receiver - automatic restart (AIDA) 20: standard receiver - EDM/RES selectable 30: extended receiver - blanking/muting | | | |
| Z | Device type: T: transmitter R: receiver | | | |
| а | Resolution: 14: 14 mm 20: 20 mm 30: 30 mm 40: 40 mm 90: 90 mm | | | |
| hhhh | Protective field height: 150 3000: from 150 mm to 3000 mm | | | |

▲ Leuze electronic

Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver

| MLC | Safety light curtain | | | |
|-----|--|--|--|--|
| | Host/Guest (optional): H: Host MG: Middle Guest G: Guest | | | |
| i | Interface (optional): /A: AS-i | | | |
| 000 | Option: //: high Vibration-proof EX2: explosion protection (zones 2 + 22) SPG: Smart Process Gating | | | |

| Note |
|---|
| A list with all available device types can be found on the Leuze electronic website at www.leuze.com. |

Notes

| 0 | Observe intended use! | | | |
|---|--|--|--|--|
| • | The product may only be put into operation by competent persons. | | | |
| • | Only use the product in accordance with its intended use. | | | |

Accessories

Mounting technology - Swivel mounts

| | Part no. | Designation | Article | Description |
|------|----------|-------------|---------|---|
| P.G. | 429393 | BT-2HF | | Contains: 2x BT-HF swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic |

Services

| | Part no. | Designation | Article | Description |
|----|----------|-------------|---|--|
| () | S981050 | CS40-I-140 | Safety inspection "Safety light barriers" | Details: Checking of a safety light barrier application in accordance with current standards and guidelines. Inclusion of the device and machine data in a database, production of a test log per application. Conditions: It must be possible to stop the machine, support provided by customer's employees and access to the machine for Leuze employees must be ensured. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure. |
| | S981046 | CS40-S-140 | Start-up support | Details: For safety devices including stopping time measurement and initial inspection. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: Max. 2 h., no mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment. |

Leuze electronic

Part no.: 68007216 – MLC510R20-1650/A – Safety light curtain receiver

Note

A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.