



the sensor people





Figure can vary

Part no.: 50126371 CML720i-R20-130.A/CN-M12-EX Light curtain receiver





# **Contents**

- Technical data
- · Dimensioned drawings
- · Electrical connection
- · Operation and display
- Suitable transmitters
- · Part number code
- Notes
- Accessories



### **Technical data**

| Dania data                          |   |  |  |
|-------------------------------------|---|--|--|
| Basic data                          | 700   |  |  |
| Series Operation principle          | 720   |  |  |
| Operating principle                 | Throughbeam principle   |  |  |
| Device type                         | Receiver  |  |  |
| Contains                            | 2x BT-NC sliding block  |  |  |
| Application                         | Object measurement  |  |  |
| Special design                      |   |  |  |
| Special design                      | Crossed-beam scanning   |  |  |
|                                     | Diagonal-beam scanning<br>Ex-protected<br>Parallel-beam scanning                                    |  |  |
|                                     |   |  |  |
| Optical data                        |   |  |  |
| Operating range                     | Guaranteed operating range  |  |  |
| Operating range                     | 0.3 7 m   |  |  |
| Operating range limit               | Typical operating range   |  |  |
| Operating range limit               | 0.2 9 m   |  |  |
| Measurement field length            | 130 mm  |  |  |
| Number of beams                     | 7 Piece(s)  |  |  |
| Beam spacing                        | 20 mm   |  |  |
| Measurement data                    |   |  |  |
| Minimum object diameter             | 30 mm   |  |  |
|                                     |   |  |  |
| Electrical data                     |   |  |  |
| Protective circuit                  | Polarity reversal protection Short circuit protected Transient protection                           |  |  |
| Performance data                    |   |  |  |
| Supply voltage U <sub>B</sub>       | 18 30 V , DC  |  |  |
| Residual ripple                     | 0 15 % , From U <sub>B</sub>  |  |  |
| Open-circuit current                | 0 135 mA , The specified values refer to the entire package consisting of transmitter and receiver. |  |  |
| Inputs/outputs selectable           |   |  |  |
| Output current, max.                | 100 mA  |  |  |
| Input resistance                    | 6,000 Ω   |  |  |
| Number of inputs/outputs selectable | 2 Piece(s)  |  |  |
| Туре                                | Inputs/outputs selectable   |  |  |
| Voltage type, outputs               | DC  |  |  |
| Switching voltage, outputs          | Typ. U <sub>B</sub> / 0 V   |  |  |
| Voltage type, inputs                | DC  |  |  |
| Switching voltage, inputs           | high: ≥6V<br>low: ≤4V   |  |  |
| Input/output 1                      |   |  |  |
| Activation/disable delay            | 1 ms  |  |  |
| Timing                              |   |  |  |
|                                     | 450 ms  |  |  |
| Readiness delay                     |   |  |  |
| Cycle time                          | 1 ms  |  |  |



| Response time per beam       | 30 µs  |  |  |
|------------------------------|--|--|--|
|                              |  |  |  |
| Interface                    |  |  |  |
| Туре                         | IO-Link , CANopen                            |  |  |
| IO-Link                      |  |  |  |
| COM mode                     | COM2   |  |  |
| Specification                | V1.0.1<br>V1.1                               |  |  |
| CANopen                      | V 1-1  |  |  |
| Function                     | Process                                      |  |  |
|                              |  |  |  |
| Connection                   |  |  |  |
| Number of connections        | 2 Piece(s)                                   |  |  |
| Plug outlet                  | Axial  |  |  |
| Connection 1                 |  |  |  |
| Function                     | Configuration interface                      |  |  |
|                              | Connection to transmitter<br>Signal IN       |  |  |
|                              | Signal OUT<br>Voltage supply                 |  |  |
| Type of connection           | Connector                                    |  |  |
| Thread size                  | M12  |  |  |
| Type                         | Male   |  |  |
| Material                     | Metal  |  |  |
| No. of pins                  | 8 -pin                                       |  |  |
| Encoding                     | A-coded                                      |  |  |
| Connection 2                 |  |  |  |
| Function                     | BUS IN<br>BUS OUT                            |  |  |
| Type of connection           | Connector                                    |  |  |
| Thread size                  | M12  |  |  |
| Туре                         | Female                                       |  |  |
| Material                     | Metal  |  |  |
| No. of pins                  | 5 -pin                                       |  |  |
| Encoding                     | A-coded                                      |  |  |
|                              |  |  |  |
| Mechanical data              | Cukia  |  |  |
| Design Dimension (W x H x L) | 30.7 mm x 54.8 mm x 183 mm                   |  |  |
| Housing material             | Metal , Aluminum                             |  |  |
| Lens cover material          | Plastic                                      |  |  |
| Housing color                | Silver                                       |  |  |
| Type of fastening            | Groove mounting Via optional mounting device |  |  |
|                              |  |  |  |
| Operation and display        |  |  |  |
| Type of display              | LED<br>OLED display                          |  |  |
| Number of LEDs               | 2 Piece(s)                                   |  |  |
| Type of configuration        | Software                                     |  |  |
| Operational controls         | Membrane keyboard                            |  |  |




| Environmental data             |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -30 60 °C     |
| Ambient temperature, storage   | -40 70 °C     |
|                                |               |
| Ex specification               |               |
| Ex-zone                        | 2             |
|                                | 22            |
| Ex device group                | II            |
|                                |               |
| Certifications                 |               |
| Degree of protection           | IP 65         |
| Protection class               | III           |
| Standards applied              | IEC 60947-5-2 |
|                                |               |
| Classification                 |               |
| Customs tariff number          | 90314990      |
| eCl@ss 8.0                     | 27270910      |
| eCl@ss 9.0                     | 27270910      |
| ETIM 5.0                       | EC002549      |
| ETIM 6.0                       | EC002549      |
|                                |               |

### **Dimensioned drawings**

All dimensions in millimeters




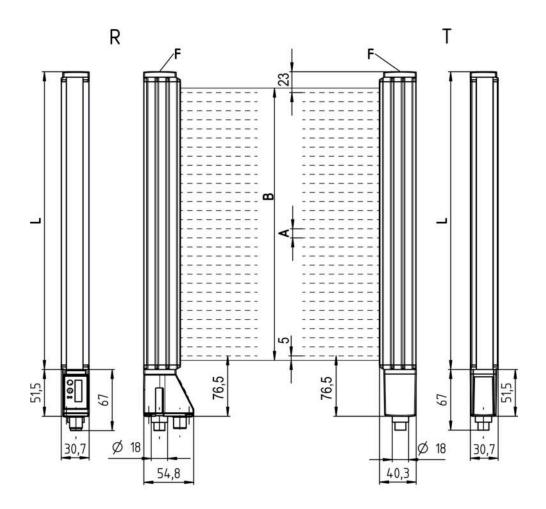





- A Beam spacing 20 mm
- B Measurement field length 130 mm
- F M6 thread
- G Fastening groove
- L Profile length 168 mm
- T Transmitter
- R Receiver

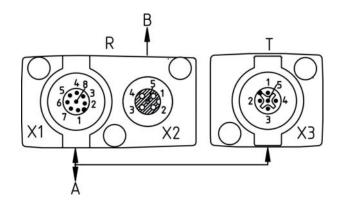




A PWR / SW IN/OUT B BUS IN / OUT

### **Electrical connection**


| Connection 1       |   |  |
|--------------------|---|--|
| Function           | Configuration interface Connection to transmitter Signal IN Signal OUT Voltage supply |  |
| Type of connection | Connector   |  |
| Thread size        | M12   |  |
| Туре               | Male  |  |
| Material           | Metal   |  |
| No. of pins        | 8 -pin  |  |
| Encoding           | A-coded   |  |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | I/O 1          |
| 3   | GND            |
| 4   | IO-Link        |
| 5   | I/O 2          |
| 6   | RS 485 Tx-     |
| 7   | RS 485 Tx+     |
| 8   | FE/SHIELD      |



| Connection 2       |                   |
|--------------------|-------------------|
| Function           | BUS IN<br>BUS OUT |
| Type of connection | Connector         |
| Thread size        | M12               |
| Туре               | Female            |
| Material           | Metal             |
| No. of pins        | 5 -pin            |
| Encoding           | A-coded           |

| Pin | Pin assignment |
|-----|----------------|
| 1   | FE/SHIELD      |
| 2   | n.c.           |
| 3   | CAN GND        |
| 4   | CAN H          |
| 5   | CAN L          |



Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199



### **Operation and display**

#### **LEDs**

| LED | Display                  | Meaning                                |
|-----|--------------------------|--|
| 1   | Green, continuous light  | Operational readiness                  |
|     | Green, flashing          | Teach / error                          |
|     |                          | Measurement frequency display          |
| 2   | Yellow, continuous light | Light path free, with function reserve |
|     | Yellow, flashing         | No function reserve                    |
|     | Off                      | Object detected                        |

#### Suitable transmitters

| Part no. | Designation                      | Article                      | Description   |
|----------|----------------------------------|------------------------------|---|
| 50126402 | CML720i-<br>T20-130.A-<br>M12-EX | Light curtain<br>transmitter | Operating range: 0.3 6 m<br>Connection: Connector, M12, Axial, 5 -pin |

#### Part number code

Part designation: CML7XXi-YZZ-AAAA.BCCCDDD-EEEFFF

| CML  | Operating principle: Measuring light curtain   |  |  |
|------|--|--|--|
| 7XXi | Series: 720i: 720i series 730i: 730i series  |  |  |
| Y    | Device type: T: transmitter R: receiver  |  |  |
| ZZ   | Beam spacing: 05: 5 mm 10: 10 mm 20: 20 mm 40: 40 mm   |  |  |
| AAAA | Measurement field length [mm], dependent on beam spacing   |  |  |
| В    | Equipment: A: connector outlet, axial R: rear connector outlet   |  |  |
| CCC  | Interface: L: IO-Link /CN: CANopen /PB: PROFIBUS /PN: PROFINET /CV: Analog current and voltage output /D3: RS 485 Modbus |  |  |
| DDD  | Special equipment: -PS: Power Setting  |  |  |
| EEE  | Electrical connection: M12: M12 connector  |  |  |
| FFF  | -EX: Explosion protection:   |  |  |

| N  | _ | 4 | c |
|----|---|---|---|
| 14 | v | · | C |

A list with all available device types can be found on the Leuze electronic website at www.leuze.com.



#### **Notes**

#### Observe intended use!

- · This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- · Only use the product in accordance with its intended use.

#### For UL applications:

- · For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/CYJV7 or PVVA/PVVA7)

#### **Accessories**

### Connection technology - Connection cables

| Part no. | Designation            | Article          | Description   |
|----------|------------------------|------------------|---|
| 50132079 | KD U-M12-5A-<br>V1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5,000 mm<br>Sheathing material: PVC |

### Connection technology - Interconnection cables

| Part no. | Designation                     | Article               | Description   |
|----------|---------------------------------|-----------------------|---|
|          | KDS DN-M12-5A-<br>M12-5A-P3-050 | Interconnection cable | Suitable for interface: IO-Link, DeviceNet, CANopen<br>Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin<br>Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin<br>Shielded: Yes<br>Cable length: 5,000 mm<br>Sheathing material: PUR |

### Connection technology - Y distribution cables

|  | Part no. | Designation                 | Article               | Description  |
|--|----------|-----------------------------|-----------------------|--|
|  | 50118183 | K-Y1 M12A-5m-<br>M12A-S-PUR | Interconnection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Female, A-coded, 8 -pin Shielded: Yes Cable length fork 1: 5,000 mm Cable length fork 2: 150 mm Sheathing material: PUR                             |
|  | 50118185 | K-YCN M12A-<br>M12A-S-PUR   | Interconnection cable | Suitable for interface: CANopen Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin Connection 2: Connector, M12, Axial, Female, A-coded, 5 -pin Connection 3: Connector, M12, Axial, Male, A-coded, 5 -pin Shielded: Yes Cable length fork 1: 250 mm Cable length fork 2: 350 mm Sheathing material: PUR |

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199



### Connection technology - Terminating resistors

| Part no. | Designation | Article         | Description   |
|----------|-------------|-----------------|---|
| 50040099 | TS 01-5-SA  | Terminator plug | Suitable for: DeviceNet, CANopen<br>Connection 1: Connector, M12, Axial, Male, A-coded, 5 -pin<br>Function: Bus termination |

### Mounting technology - Mounting brackets

| Part no. | Designation    | Article             | Description  |
|----------|----------------|---------------------|--|
| 50142900 | BT 700M.5-2SET | Mounting device set | Contains: 2x mounting brackets, 1 teach template, 4 M6 x 10 screws Design of mounting device: Bracket mounting Fastening, at system: Through-hole mounting, T slotted hole Mounting bracket, at device: Screw type, Sliding block Type of mounting device: Rigid Material: Steel |

### Mounting technology - Swivel mounts

|     | Part no. | Designation | Article              | Description   |
|-----|----------|-------------|----------------------|---|
| EE. | 429046   | BT-2R1      | Mounting bracket set | Contains: 2x BT-R swivel mount, 1 cylinder for mounting on the light curtain Fastening, at system: Through-hole mounting Mounting bracket, at device: Clampable Type of mounting device: Turning, 360° Material: Metal, Plastic |

### General

| Part no. | Designation | Article               | Description                   |
|----------|-------------|-----------------------|-------------------------------|
| 50109217 | K-V M12-Ex  | Safety locking device | Housing material: Plastic, PA |

### Services

| Part no. | Designation | Article          | Description   |
|----------|-------------|------------------|---|
| S981001  | CS10-S-110  | Start-up support | Details: Performed at location of customer's choosing, duration: max. 10 hours.  Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses.  Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment. |
| S981005  | CS10-T-110  | Product training | Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.   |

Leuze electronic GmbH + Co. KG, In der Braike 1, 73277 Owen Phone: +49 7021 573-0, Fax: +49 7021 573-199



A list with all available accessories can be found on the Leuze electronic website in the Download tab of the article detailed page.