


AUDIO INTERFACES

müller AS 26.x1 knx

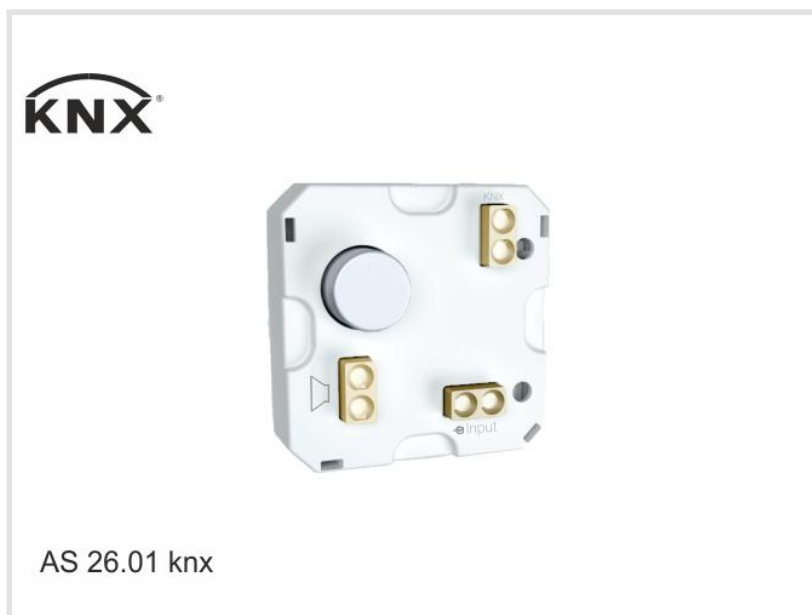

Overview

- Chime / door bell for building automation KNX
- 12 pre-defined tones/melodies
- 1 binary input
- 10 input objects and 16 scenes can be configured
- External loudspeaker can be connected (8 ohms)
- Included loudspeaker (version AS26.11knx)
- Adjustable volume level
- No auxiliary supply needed
- Day/night mode function
- Mute function
- Clearly structured ETS
- Easy handling and mounting
- Flush-mounted fitting
- Compact housing
- Can be installed behind any kind of blind cover or also behind a switch/pushbutton in a long mounting box!

Order numbers

■ müller	
AS 26.01 knx	Chime interface without loudspeaker
AS 26.11 knx	Chime interface with loudspeaker

AUDIO INTERFACES

müller AS 26.x1 knx

Order information

	EAN	Art. No.
AS 26.01 knx	4022709241504	24150
AS 26.11 knx	4022709242082	24208
LA 06.10 (loudspeaker accessories)	4022709242075	24207

Technical data

Supply voltage	via KNX bus voltage
Bus current	< 12 mA without output signal < 20 mA with output signal
Bus system	KNX
Input	1 binary input
Output	1 speaker output
Volume level	11 volume steps
Speaker output	max. 0,45 W
Impedance ext. speaker	8 Ohm
Melodies	12 preset tones
Applikation software	ETS5 or higher
Permitted ambient temperature	-10...+45 °C
Housing	self-extinguishing thermoplastic
Dimensions AS26.01knx	38 x 38 x 15 mm
Dimensions loudspeaker	∅ 60 mm incl. mounting ring
Housing color	studio white (similar to RAL 9016) specific colors on request
Mounting	flush-mounting
Type of connection	push-in connector
Type of protection	IP20 according to DIN EN 60529
Class of protection	III when installed according to regulations

Rights to technical amendments reserved / Technische Änderungen vorbehalten
Droits de modifications techniques réservés / Suscettibile di errori e modifiche

