
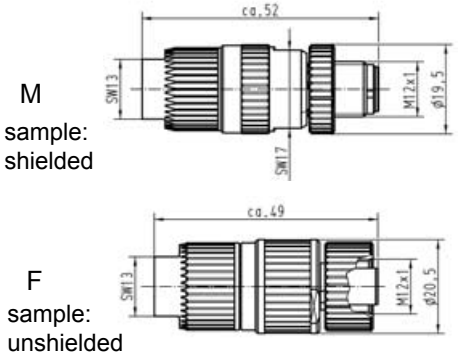



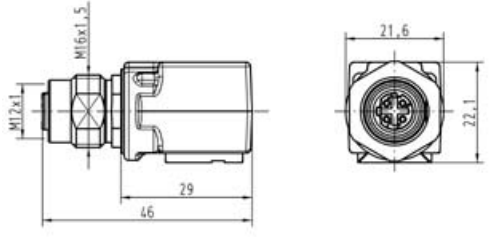


# HARAX® M12-L / M12 Panel Feed Through / Adaptor M12-RJ45



Identification	Part-Number		Drawing	Dimensions in mm
	Male contact	Female contact		
<p><b>HARAX® M12-L</b></p>  <p>D-coded (Ethernet) shielded</p> <p>A-coded shielded unshielded</p>	<p>21 03 281 1405</p> <p>21 03 221 1405 21 03 212 1305</p>	<p>21 03 281 2405</p> <p>21 03 221 2405 21 03 212 2305</p>	 <p>M sample: shielded</p> <p>F sample: unshielded</p> <p>M F M F D-coded A-coded</p>	

Identification	Part-Number		Drawing	Dimensions in mm
	Male contact	Female contact		
<p><b>M12 Panel Feed Through</b></p> <p>Panel feed through M12, female D-coded, 50 cm conductors</p>  <p>Panel feed through M12, male A-coded, 50 cm conductors</p> 	<p>21 03 311 1402</p>	<p>21 03 371 2403</p>		
<p>Panel feed through M12, female D-coded, dip solder pin, straight</p>		<p>21 03 371 2402</p>		

Identification	Part-Number	Drawing	Dimensions in mm
<p><b>Adaptor M12-RJ45</b></p> 	<p>21 03 381 4400</p>		
<p><b>Seal M12-L</b></p>	<p>21 01 010 2003</p>		