


MIRO TRIAC 1X400VAC-10A


IN: 53 VDC - OUT: 400 VAC / 10 A

Triac 10 A
24 V DC
Screw plug-in terminals

[Link to Product](#)

Illustration

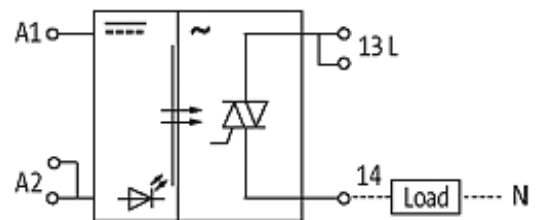

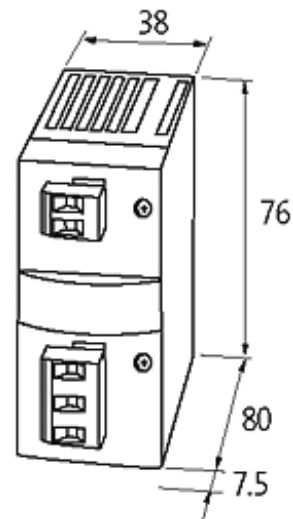

Product may differ from Image

Input

Voltage range ON	10...53 V DC
Voltage range OFF	0...3 V DC
Control current	approx. 7.8 mA
Control voltage	24 V DC
LED display	LED (green)

General data

Housing	Black plastic, flame retardant
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Dimensions H × W × D	76×38×80 mm

Output

Switching voltage	12...400 V AC
Switching current per output	100 mA/10 A (no derating)
Saturation voltage (across output)	max. 0.15 V AC
Leakage current (output is open)	max. 1 mA
Switching time ON/OFF	10/10 ms
Switching frequency	max. 20/1 Hz (resist./ind.)
Surge current	70 A

Commercial data

country of origin	CZ
customs tariff number	85414090
minimum order quantity	1