

Chip Beads (2504021217Y0)



Part Number: 2504021217Y0

MULTI-LAYER CHIP BEAD

Part Number System: Example 2512063017Y1

25	5 1206 301		7	Y	1 Current Code		
Chip Package		Impedance	Packaging	Material			
Bead	Size	Code	Code	Code	0 < 1.0A		
Code	Code	300 A	6= Bulk Packed	Y = Standard Signal Speed	1 ≥1.0A <2.0A		
		7	'= Taped and Reeled 7" Reel	Z = High Signal Speed	3 ≥3.0A <4.0A		
		8=	= Taped and Reeled 13" Reel	H = GHz Speed	ETC		

Fair-Rite offers a broad selection of cost effective multi-layer chip beads to suppress conducted EMI signals. Chip beads can be used in an array of devices such as cellular phones, computers, laptops, pagers, etc. The small package sizes accommodate automated placements and allow for a dense packaging of circuit boards.

Chip Beads are available in standard, high and GHz signal speeds.

Recommended Soldering Profile

Packaging Options:

-All multi-layer chip beads are supplied taped and reeled, if required bulk packed chip beads can be provided.

The suggested land patterns are in accordance to the latest revision of IPC-7351.

<u>Weight:</u> 0.002 (g)

Package Size: 0402 (1005)

Dim	mm	mm tol	nominal inch			
А	0.5	±0.05	0.02	_		
В	0.5	±0.05	0.02	_		
С	1	±0.05	0.04	_		
D	0.25	±0.15	0.01			
Land P	atterns					
V		W	Х	Y	Ζ	
0.40		1.30	0.70	0.90		
(0.016'	")	(0.051")	(0.028")	(0.035")	—	

Reel Information									
Tape Width mm	Pitch mm	Parts 7"	Reel	Parts	13"	Reel	Parts	14"	Reel
8	4	10000							


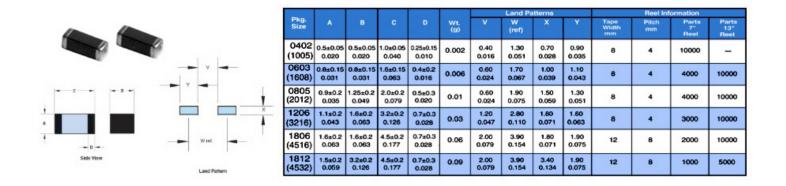


Chart Legend

+ Test frequency

Typical Impedance (Ω)					
50 MHz	90				
100 MHz^+	12	0 ±25	5%		
500 MHz	0				
1000 MHz^+	-				
Electrical Properties					
Max DCR (Ω)		0.5			
Max Curren (mA)	t	200			

The impedance values listed are typical values. The nominal impedance with a +/-25% tolerance is specified for the + marked 100 MHz. Chip beads are measured for impedance on the HP 4291A and fixture HP 16192A. Chip beads are 100% tested for impedance and dc resistance.

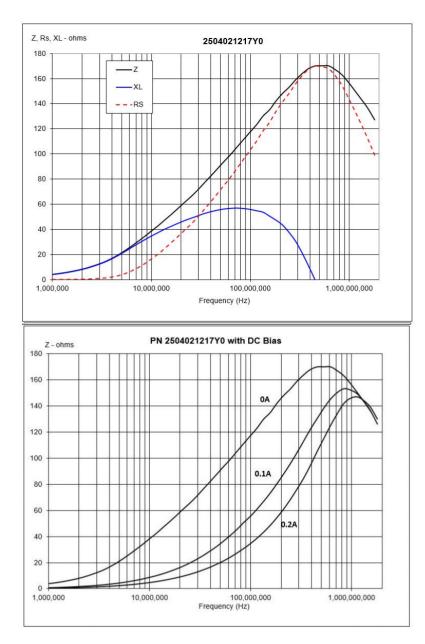

CSV Download

 Fair-Rite Products Corp.
 One Commercial Row, Wallkill, New York 12589-0288

 888-324-7748
 845-895-2055
 Fax: 845-895-2629
 ferrites@fair-rite.com
 www.fair-rite.com