

# Main switchSurface mounting

Part no. P3-63/I4/SVB Article no. 207343



Catalog No. SP3-063-14CRQ

#### IP65

Delivery programme		
Product range		Switch-disconnectors
Basic function		Main switches Maintenance switches Manual override switches
Part group reference		P3
Design		Surface mounting
Protection type		IP65
		totally insulated
Emergency stop		As an emergency switching off/emergency stop device
		With red rotary handle and yellow locking ring
Standards		According to IEC/EN 60204-1, VDE 0113 Part 1
Locking facility		Lockable in the 0 (Off) position
		without auxiliary contacts
Contact sequence		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Front plate no.		FS 908
Main conducting paths		
No. of poles	М	3
Auxiliary contacts		
	N/O	0
7	В	0
Max. motor rating		
AC-23A		

400/415 V 50-60 Hz	Р	kW	30
Rated uninterrupted current	l <sub>u</sub>	Α	63

Approvals

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Specially designed for NA
Suitable for
Degree of Protection

UL 508; CSA-C22.2 No. 14-05; IEC/EN 60947-3; CE marking E36332 NLRV 12528 3211-05 UL listed, CSA certified Yes, in combination with "+NA-I4" (105868) Branch circuits, suitable as motor disconnect IEC: IP65; UL/CSA Type 3R, 12

#### General

Gonoral			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL switch disconnector according to IEC/EN 60947-3
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	0.1
Maximum operating frequency		Operation h	ons#0
Climatic proofing			Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC 60068-2-30
Ambient temperature		°C	
Open		°C	- 25 - 50
Enclosed		°C	- 25 - 40
Mounting position			As required
Mechanical shock resistance to IEC 60068-2-27	Half- sinusoidal shock 20 ms	g	> 15

#### Contacts

Outlacts			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Overvoltage category/pollution degree			III/3
Rated uninterrupted current	l <sub>u</sub>	Α	
open	l <sub>u</sub>	Α	63
Enclosed	lu	Α	63
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/ gL	80
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	$A_{rms}$	1260
Switching angles		0	90
Current heat loss per contact at I <sub>e</sub>		W	4.5

#### **Terminal capacities**

Solid or stranded	mm <sup>2</sup>	1 x (2.5 - 35) 2 x (2.5 - 10)
Flexible with ferrules to DIN 46228	$\text{mm}^2$	
Flexible with ferrule	mm <sup>2</sup>	1 x (1.5 - 25) 2 x (1.5 - 6)
Terminal screw		M5
Tightening torque	Nm	3

### **Switching capacity**

AC	х	x U <sub>s</sub>	
Rated making capacity $\cos \phi = 0.35$	A	Α	800
Rated breaking capacity, motor load switch $\cos\phi$ = 0.35	A	Α	

230 V		Α	640
400 V		Α	600
500 V		Α	590
690 V		Α	340
Rated operational current 440 V load-break switch AC-21A	l <sub>e</sub>	Α	63
Rating, AC-3 motor load switch	Р	kW	
220 V 230 V	Р	kW	15
380 V 400 V	Р	kW	30
500 V	Р	kW	30
660 V 690 V	Р	kW	20
AC-23A Motor load switches (main switches maintenance switches)	Р	kW	
230 V	Р	kW	18.5
400 V	Р	kW	30
500 V	Р	kW	37
690 V	Р	kW	50
DC		$x U_s$	
DC-1, Load-break switches L/R = 1 ms			
Rated operational current	I <sub>e</sub>	Α	63
Voltage per contact pair in series		V	60
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts		Quantity	1
48 V			
Rated operational current	l <sub>e</sub>	Α	50
Contacts		Quantity	2
60 V			
Rated operational current	I <sub>e</sub>	Α	50
Contacts		Quantity	3
120 V			
Rated operational current	l <sub>e</sub>	Α	25
Contacts		Quantity	3
Auxiliary contacts			

### **Auxiliary contacts**

Standards According to IEC/EN 60204-1, VDE 0113 Part 1

#### **Notes**

**Notes** Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft The rated uninterrupted current  $l_u$  is stated at max. connected cross-section.

For terminal capacity solid, stranded and flexible:


Max. 2 cross-section sizes difference admissible when using 2 conductors.

### **Technical data ETIM 4.0**


Version as switch disconnector compact		Yes
Version as main switch		Yes
Version as maintenance-/service switch		Yes
Version as safety switch		No
Version as emergency stop installation		Yes
Max. rated operation voltage Ue AC	V	690
Rated permanent current lu	Α	63
Rated operation power AC-3, 400 V	kW	30
Rated operation power at AC-23, 400V	kW	37
Conditioned rated short-circuit current Iq	kA	0
Number of poles		3
Number of auxiliary contacts as normally closed contact		0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as change-over contact		0
Motor drive optional		No

Motor drive integrated	No
Voltage release optional	No
Device construction	Complete device in housing
Suitable for ground mounting	Yes
Suitable for front mounting	No
Suitable for front mounting center	No
Suitable for distribution board installation	No
Suitable for intermediate mounting	No
Type of control element	
Interlockable	Yes
Connection type main current circuit	Screw connection
Degree of protection (IP), front side	IP65

### **Characteristics**

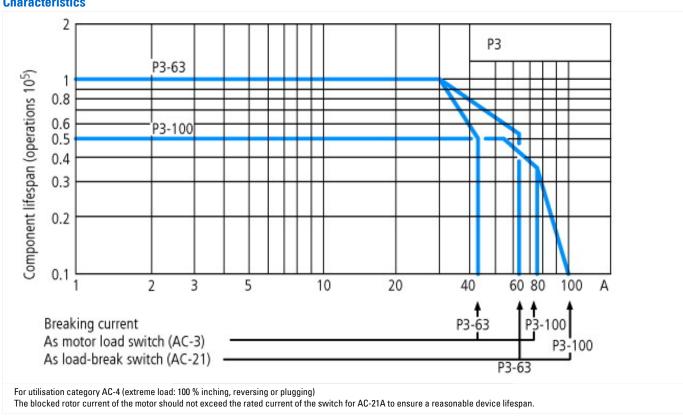

# **Dimensions**

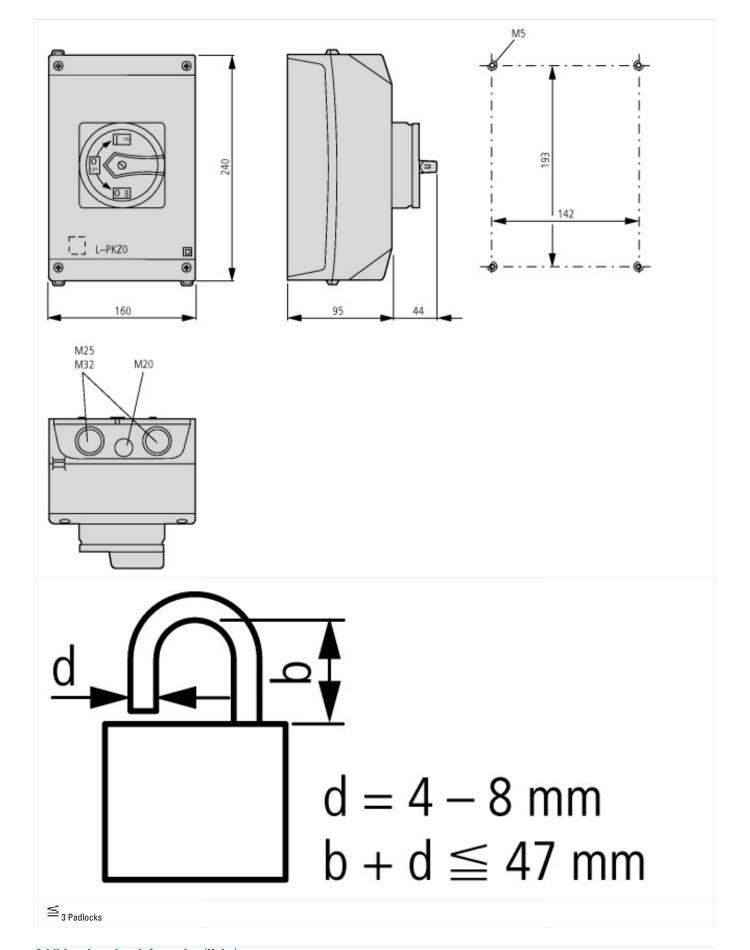

## **Additional product information (links)**

IL03801010Z (AWA1150-1982) Cam switch: switch-disconnector

IL03801010Z (AWA1150-1982) Cam switch: switch-disconnector

05/31/2013

ftp://ftp.moeller.net/DOCUMENTATION/AWA\_INSTRUCTIONS/IL03801010Z2011\_06.pdf

http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=4.87