

Product Search Data Sheet

NFG0QHB372HS2#


In Production RoHS REACH

< List of part numbers with package codes > NFG0QHB372HS2D NFG0QHB372HS2B



Appearance & Shape





Applications

| Limited Usage | For differential signal interface line |
|---------------|--|
| Other Usage | For general |

Note: This datasheet may be out of date. Please download the latest datasheet of NFG0QHB372HS2# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=NFG0QHB372HS2%23

"#" indicates a package specification code.

Packaging Information

| Packaging | Specifications | Standard Packing Quantity |
|-----------|------------------|---------------------------------|
| D | 180mm Paper Tape | 15000 |
| В | Bulk(Bag) | 500 |



Features

1. Small size and tight dimensional tolerance Size: 0.65x0.50x0.30mm

Tolerance: +-0.05mm

- 2. Common mode noise suppression effect
- (The effect become maximum at 2.4GHz, 3.7GHz and 5.4GHz)
- 3. Prevents signal damaging in high speed differential lines.
- 4. Designed to match line impedance.

Application

High speed differential signal lines.

- HDMI,DVI,DisplayPort,USB3.0 etc.
- 1. Note PCs
- 2. Cellular phones
- 3. Digital Still Cameras, Digital Video Cameras

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Product Search Data Sheet

NFG0QHB372HS2#

Note: This datasheet may be out of date. Please download the latest datasheet of NFG0QHB372HS2# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=NFG0QHB372HS2%23

"#" indicates a package specification code.



Specifications

| Operating Temperature | |
|-----------------------------|----|
| Range(Self-temperature rise | No |
| is included) | |

| Shape | SMD |
|--|-------------------|
| Size Code (in mm) | 0605 |
| Size Code (in inch) | 025020 |
| Length | 0.65mm |
| Length Tolerance | ±0.05mm |
| Width | 0.5mm |
| Width Tolerance | ±0.05mm |
| Thickness | 0.3mm |
| Thickness Tolerance | ±0.05mm |
| Common Mode Impedance (at 100MHz) | 9Ω |
| Common Mode Impedance (at 100MHz) Tolerance | (Тур.) |
| Common Mode Insertion Loss Characteristic | 30dB Typ.(3.7GHz) |
| Rated Current | 100mA |
| Derating of Rated Current | No |
| Rated Voltage | 5Vdc |
| Withstanding Voltage | 12.5Vdc |
| DC Resistance(max.) | 2.375Ω |
| DC Resistance | 1.9Ω±25% |
| Insulation Resistance(min.) | 100ΜΩ |
| Cut-off Frequency | 11GHz (Typ.) |
| Operating Temperature Range | -40°C to 85°C |
| Mass(typ.) | 0.0003g |
| Number of Circuit | 1 |

| 2 | 0 | f | 2 |
|---|---|---|---|
| _ | U | | J |

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet


NFG0QHB372HS2#


Product Data

Note: This datasheet may be out of date. Please download the latest datasheet of NFG0QHB372HS2# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=NFG0QHB372HS2%23


"#" indicates a package specification code.

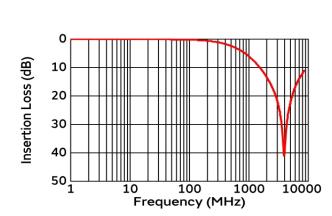

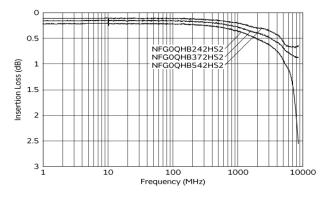

Common Mode Insertion Loss Characteristic (Typical Value)

Differential Mode Transmission Characteristics (Typical Value)

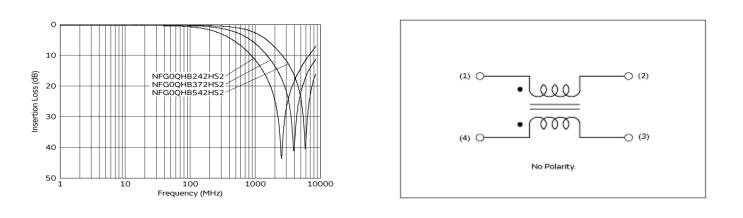

Common Mode Insertion Loss Characteristic (Main Items)(Typical Value)

Equivalent Circuit

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



^{2.} This datasheet has only typical specifications because there is no space for detailed specifications.