

Crimp Fittings

Press-armaturen


Embouts sertis

Raccordi a graffare

Racores para presión

BFA


BSP Female Swivel, 45° Elbow
 BSP-Dichtkopf, 45° Krümmer
 Globeseal BSP coudé 45°
 Femmina girevole a 45°, gas
 Hembra loca BSP acodado a 45°

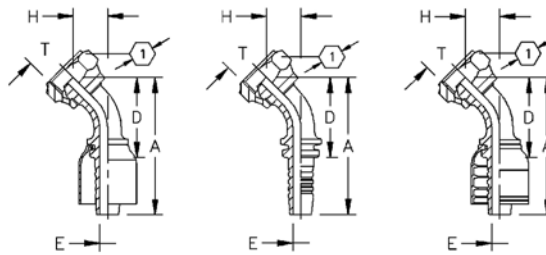

Part Number	Part Number	Part Number	Thread T	Flange	Tube O.D.	ND	Hose Size	A	D	H	E Ø	HEX [1]	HEX [2]	K Ø
OTC Fitting	Skive Nipple	TTC Fitting						mm	mm	mm	mm			mm
1G4BFA4	1S4BFA4	1A4BFA4	G 1/4				-4	52,3	28,9	16,5	4,2	17		
1G4BFA5	1S4BFA5	1A4BFA5	G 1/4				-5	66,7	42,8	16,5	5,3	17		
1G6BFA6	1S6BFA6	1A6BFA6	G 3/8				-6	73,8	48,5	19,0	6,7	22		
1G8BFA6	1S8BFA6	1A8BFA6	G 1/2				-6	84,3	59,0	24,8	6,7	27		
1G8BFA8	1S8BFA8	1A8BFA8	G 1/2				-8	71,0	41,3	24,8	9,6	27		
1G10BFA10	1S10BFA10	1A10BFA10	G 5/8				-10	100,4	71,0	27,4	12,8	27		
1G12BFA12	1S12BFA12	1A12BFA12	G 3/4				-12	108,8	78,6	29,4	15,5	32		
1G16BFA16	1S16BFA16	1A16BFA16	G 1				-16	126,8	92,4	33,2	20,7	41		
1G20BFA20	1S20BFA20	1AP20BFA20*	G 1 1/4				-20	153,6	109,6	37,2	26,6	50		
		1AT20BFA20**	G 1 1/4				-20	153,6	109,6	37,2	26,6	50		
1G24BFA24	1S24BFA24	1A24BFA24	G 1 1/2				-24	173,1	126,8	44,1	32,0	55		
1G32BFA32	1S32BFA32	1A32BFA32	G 2				-32	210,7	160,5	52,2	44,4	70		

BFB

BSP Female Swivel, 90° Elbow
 BSP-Dichtkopf, 90° Krümmer
 Globeseal BSP coudé 90°
 Femmina girevole a 90°, gas
 Hembra loca BSP acodado a 90°

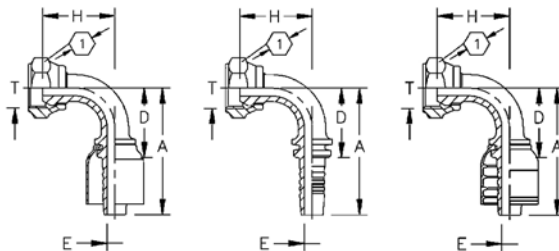

Part Number	Part Number	Part Number	Thread T	Flange	Tube O.D.	ND	Hose Size	A	D	H	E Ø	HEX [1]	HEX [2]	K Ø
OTC Fitting	Skive Nipple	TTC Fitting						mm	mm	mm	mm			mm
1G4BFB4	1S4BFB4	1A4BFB4	G 1/4				-4	56,4	33,0	31,0	4,2	17		
1G4BFB5	1S4BFB5	1A4BFB5	G 1/4				-5	54,8	30,9	31,0	5,3	17		
1G6BFB5	1S6BFB5	1A6BFB5	G 3/8				-5	59,5	35,6	36,3	5,3	22		
1G6BFB6	1S6BFB6	1A6BFB6	G 3/8				-6	56,9	31,6	35,0	6,7	22		
1G8BFB6	1S8BFB6	1A8BFB6	G 1/2				-6	74,6	49,3	48,5	6,7	27		
1G8BFB8	1S8BFB8	1A8BFB8	G 1/2				-8	63,9	34,2	37,5	9,6	27		
1G10BFB8	1S10BFB8	1A10BFB8	G 5/8				-8	90,7	61,0	56,3	9,6	27		
1G10BFB10	1S10BFB10	1A10BFB10	G 5/8				-10	90,6	61,2	56,3	12,8	27		
1G12BFB10	1S12BFB10	1A12BFB10	G 3/4				-10	98,1	68,7	61,5	12,8	32		
1G12BFB12	1S12BFB12	1A12BFB12	G 3/4				-12	82,2	52,0	47,5	15,5	32		
1G16BFB16	1S16BFB16	1A16BFB16	G 1				-16	107,9	73,5	71,5	20,7	41		
1G20BFB20	1S20BFB20	1AP20BFB20*	G 1 1/4				-20	146,2	102,2	82,5	26,6	50		
		1AT20BFB20*	G 1 1/4				-20	146,2	102,2	82,5	26,6	50		
1G24BFB24	1S24BFB24	1A24BFB24	G 1 1/2				-24	164,1	117,8	97,5	32,0	55		
1G32BFB32	1S32BFB32	1A32BFB32	G 2				-32	201,9	151,7	120,7	44,4	70		

* 1-wire
 ** 2-wire

* 1-wire
 ** 2-wire

* 1-wire
 ** 2-wire

* 1-wire
 ** 2-wire

* 1-wire
 ** 2-wire

Specification subject to change without notice