

MOTOR SUPPRESSOR


RC, 3x400...575VAC/4kW

3 × 400 V AC 3 × 575 V AC RC

For DIN-rail mounting use $1 \times \text{Art.-No.} 20900$ adapter feet Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.


Link to Product

Illustration

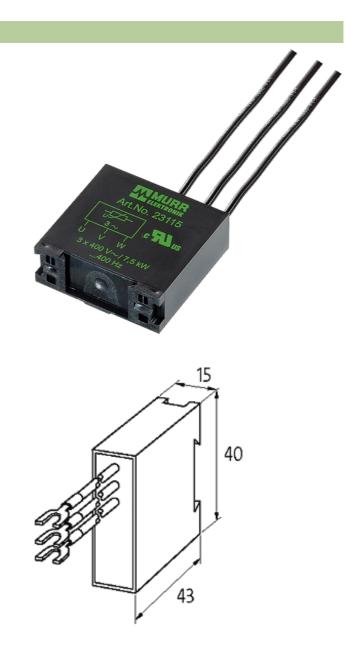

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/15





RC

Product may differ from Image

Approvals **G**RUS **Technical Data** Material Flame retardant plastic acc. to (UL 94) Potting compound 2-component epoxy Frequency 50...60 Hz **General data** Temperature range -20...+60 °C approx. 200 mm, single cores 0.35 mm² self-securing fork terminal Connection ends M4 Dimensions H × W × D 43×15×40 mm **Commercial data** country of origin CZ customs tariff number 85363010 1 minimum order quantity

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 05/15

Murrelektronik GmbH | Falkenstraße 3,71570 Oppenweiler | Fon +49 (71 91) 47-0, Fax +49 (71 91) 47-491000 | shop@murrelektronik.de | shop.murrelektronik.de