

# **SPECIFICATION**

- Part No. : **DBP.915.V.A.30**
- Description : Dielectric Band Pass Filter for 915MHz Bandwidth 5MHz
- Features : Center Frequency 915MHz Supports US ISM Radio Applications. Low Insertion Loss Low Pass-Band Ripple High Ultimate Attenuation Dims: 8.7\*6\*3mm







### **1. Introduction**

Taoglas Taoglas are utilizing their deep understanding of the RF component design and manufacturing process to provide high-quality, small-form-factor, cost-effective and easy to implement RF filters. The Taoglas Filters Division will feature a range of off-the-shelf filters for a variety of applications, including filters for emerging license free bands used for IoT and for GPS L1/L2 and L1/L5 applications. We can also work with customers to develop bespoke filter solutions.

Taoglas dielectric filters are designed to be used in wireless transmitters or receivers. These filters are designed to protect the LNA from noisy out of band emissions originated from nearby transmitters that can overdrive, or even damage your LNA. Overdriving the LNA results in non-linear distortion which negatively impacts the sensitivity of your receiver.

By selecting the proper Taoglas filter you can eliminate unnecessary out of band noise while maintaining minimal in-band insertion loss. The filter is manufactured as a single ceramic block [monoblock] which provides high reliability, low insertion loss and high attenuation in a simple compact SMD package.

The DBP.915.V.A.30 is a standard Taoglas product but can be customized for specific customer needs. For more information please contact your regional sales office.




## 2. Specification

ELECTRICAL					
Centre Frequency (Fo)	915MHz				
3dB Bandwidth	5MHz				
Insertion Loss	3.2 dB max				
Passband Ripple	0.7 dB max				
Return Loss	< -10 dB				
Attenuation	<ul> <li>&gt; 55.0 dB @ 0 ~ 452MHz</li> <li>&gt; 40.0 dB @ 452MHz ~ 806MHz</li> <li>&gt; 40.0 dB @ 806MHz ~ 849MHz</li> <li>&gt; 10.0 dB @ 849MHz ~ 901MHz</li> <li>&gt; 10.0 dB @ 932MHz ~ 1GHz</li> <li>&gt; 33.0 dB @ 1GHz ~ 2GHz</li> </ul>				
In/Out Impedance	50 Ω				
Power Dissipation	1.0 W min.				
MECHANICAL					
Dimension	8.7 x 6 x 3mm (L x W x H)				
Material	Ceramic				
Finish	Ag plated				
ENVIRONMENTAL					
Operating Temperature	-40°C to 85°C				
Storage Temperature	-40°C to 85°C				
Moisture Sensitivity Level (MSL)	3 (168 Hours)				




### **3. Characteristics Curve**

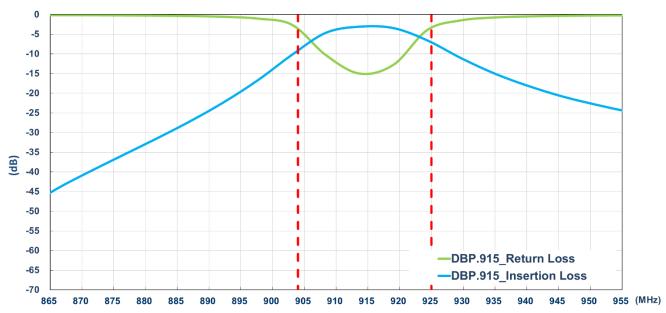

#### 3.1. Pass Band Return & Insertion Loss


#### 3.2. Out-Of-Band Attenuation

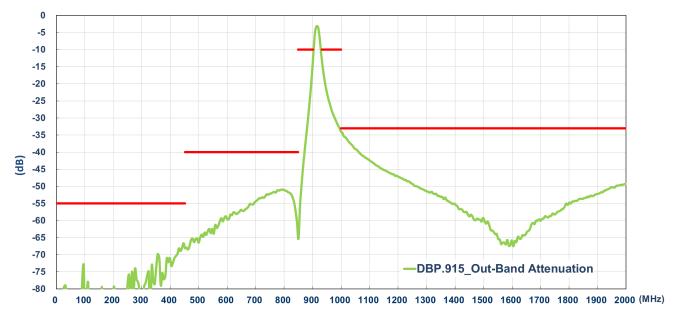



## 4. Mechanical Drawings (Unit: mm)


### 4.1. Antenna Drawing

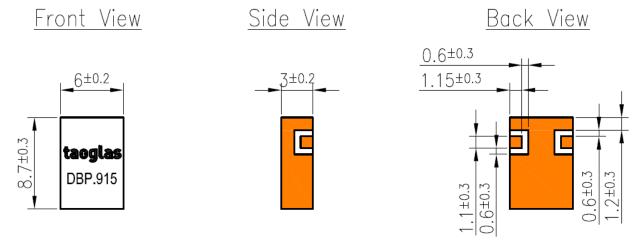




#### 4.2. Recommended PCB Layout

#### 4.2.1. Top Copper

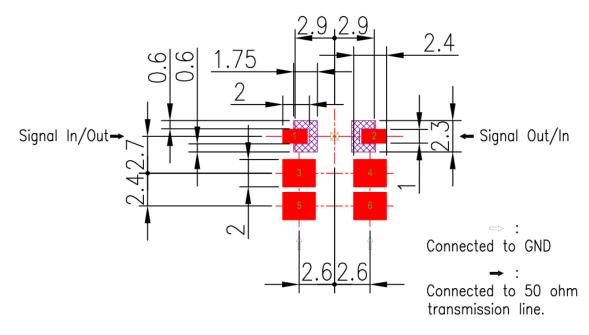

4.2.2. Top Solder Paste

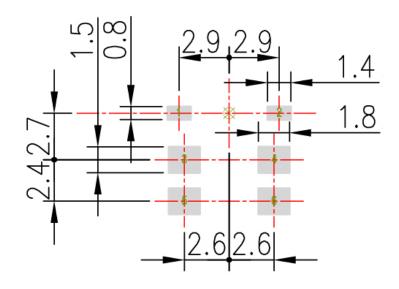


NOTE:


- 1. Ag Plated area
- 2. Solder Mask area
- Copper area
   Paste area
- 5. Copper Keepout Area
- 6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
- 7. The dimension tolerances should follow standard PCB manufacturing guidelines



#### 4.2.3. Top Solder Mask

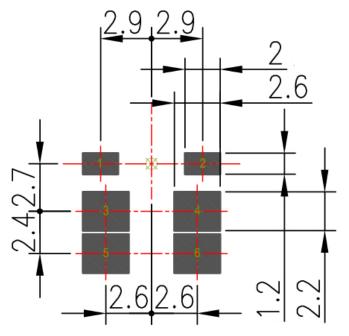

#### 4.2.4. Composite Diagram

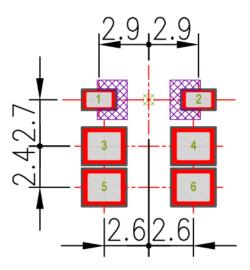


#### NOTE:

- 1. Ag Plated area
- 2. Solder Mask area
- Copper area
   Paste area
- 5. Copper Keepout Area
- 6. Any vias in pads should be either filled or tented to prevent solder from wicking away from the pad during reflow.
- 7. The dimension tolerances should follow standard PCB manufacturing guidelines



#### 4.3. Evaluation Board

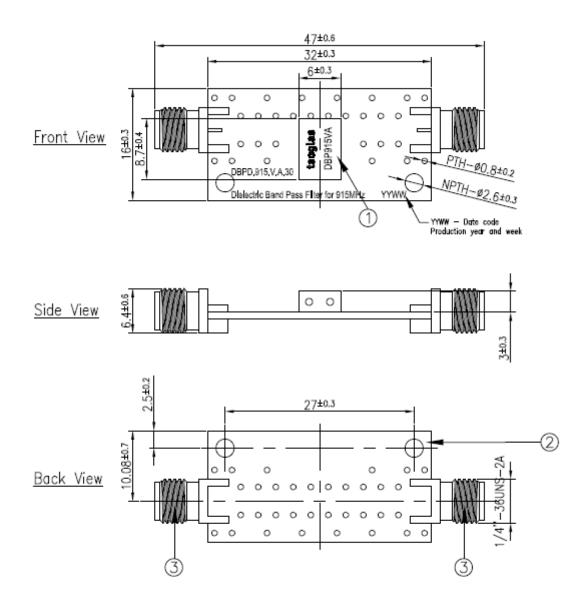


NOT	3				
1.A	material	must	be	RoHS	compliant.

	Name	Materia	Finish	QTY
1	Filter	Ceramic	Clear	1
2	PCB	Composite 1.0t	Black	1
3	SMA(F) ST	Brass	Au Plated	2




## **5. Recommended Reflow Soldering Profile**

Phase	Profile Features	Maximum
	Temperature Min	150 °C
Preheat	Temperature Max	180 °C
	Duration	60-120 sec
Ramp-Up	Avg. Ramp up rate	3 °C/sec (max)
Reflow	Temperature	220 °C
	Duration	30-40 sec
Peak	Temperature	265 °C
	Duration	5 sec Max
Ramp Down	Avg. Ramp down rate	3 °C/sec (max)

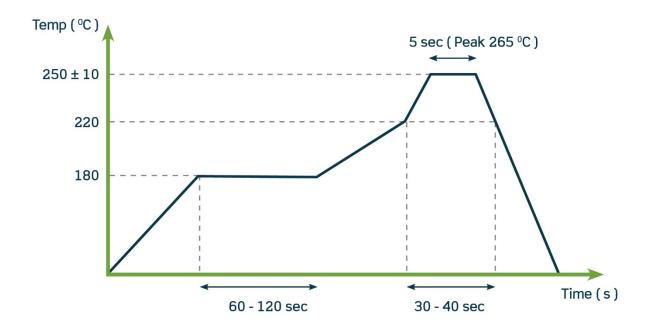




## **6. Recommended Reflow Soldering Profile**

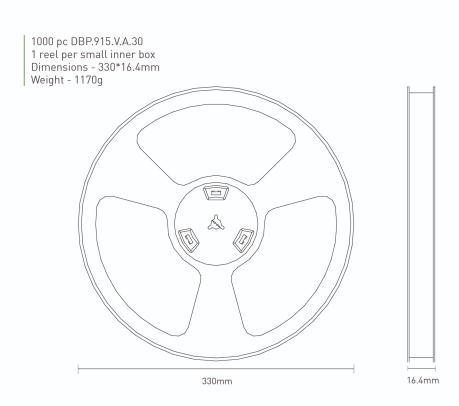

SPE-17-8-060/B/AW Page **10** of **12** 



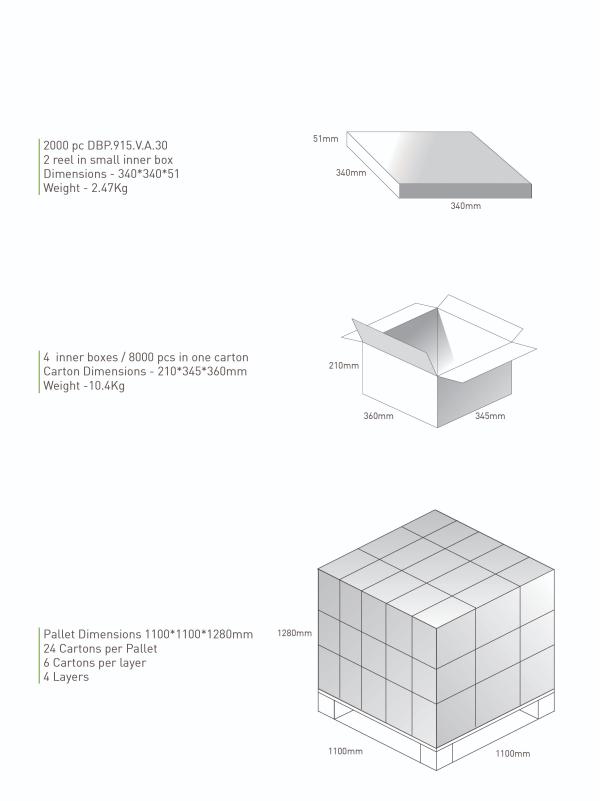



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.