

M5 Female to Female Brass PCB Spacers



DESCRIPTION

5mm AF hexagonal female to female spacers with an M5 tapped hole in each end.

APPLICATIONS

Mounting printed circuit boards or other panels on to a chassis. Ideal for applications where non-ferrous parts are required.

Brass

F-F

M5



GENERAL SPECIFICATION

Series	Brass PCB Spacers
Type	Female-Female (F-F) M5 thread
Across Flats (AF)	8mm



MATERIALS

Material	Material acc. to DIN 17660: Cu Zn 39 Pb 3
Material Number	2.0401
Finish	Surface finish acc. to DIN 267: nickel plated (G 3 E)
Tensile Strength	Min 430 N/mm ²
Elongation after fracture min. (%)	11



CERTIFICATION AND STANDARDS

Material Specification	DIN 17660
Plating Specification	DIN 267



ENVIRONMENTAL/OPERATING SPECIFICATION

Maximum Tightening Torque	2.2 Nm
---------------------------	--------





OPTIONS

Lengths	Custom lengths are available
Material	E.g., steel, stainless steel, aluminium*
MOQ may apply	



DIMENSIONS/DRAWINGS

Dimensions	mm
------------	----

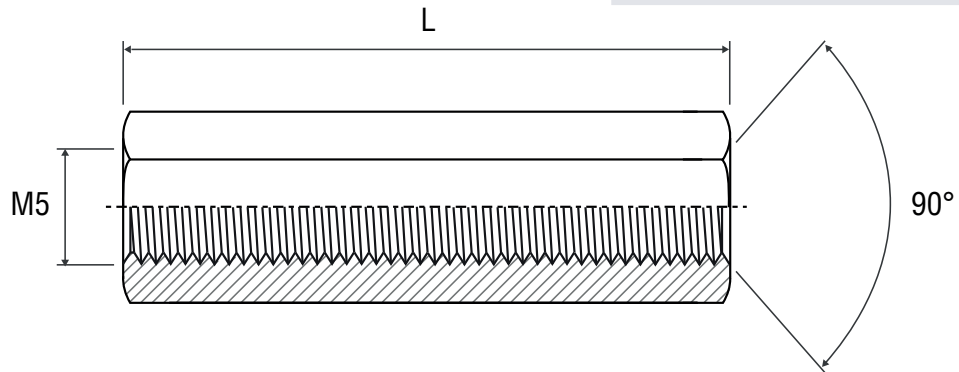

PART NUMBER TABLE

Part Number Units	Body Length (L) mm	Pack quantity (pieces)	Thread Depth mm	Weight (per piece) g	EAN	UNSPSC	Country of origin
52-4376	10	25	10	3.212	5053556003945	31161816	Germany
52-4378	20	25	20	6.38	5053556003969	31161816	Germany

R-TECH

Tried & trusted technology

Important Notice: This data sheet and its contents (the "Information") belong to Rapid Electronics Limited or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Rapid Electronics Limited assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Rapid Electronics Limited were aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Rapid Electronics Limited's liability for death or personal injury resulting from its negligence.