



RESIDUAL CURRENT MONITOR DIGITAL 4-CHANNEL, TYPE A IDN 0,03A 30A 0,02 10 SEC, (INS, SEL)

Figure similar

Model		
product brand name		SENTRON
Main circuit		
<b>Operating frequency / Rated value</b>		
• minimum	Hz	50
• maximum	Hz	60
<b>Operating voltage / Rated value</b>		
• maximum	V	276
Control current		
<b>Control supply voltage</b>		
• with AC / at 50 Hz / Rated value / minimum	V	184
• with AC / at 50 Hz / Rated value / maximum	V	276
• with AC / at 60 Hz / Rated value / minimum	V	184
• with AC / at 60 Hz / Rated value / maximum	V	276
Auxiliary circuit		
Number of CO contacts / for auxiliary contacts		0
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		5
Suitability		
<b>Suitability for operation</b>		For AC networks
Product function		
Product function / Fault storage		Yes

## Connections

Type of electrical connection	screw-type terminals
-------------------------------	----------------------

## Mechanical Design

Height	mm	85
Width	mm	54
Depth	mm	68

### General Product Approval

### Declaration of Conformity



## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SV82006KK>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SV82006KK/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SV82006KK](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SV82006KK)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

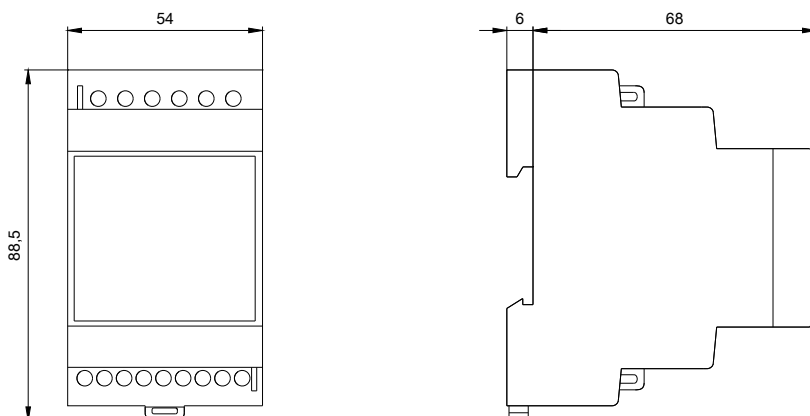

last modified:

11.03.2015