



HF-Performer Intelligent for TL5 HE/HO lamps

HF-Performer Intelligent 2 14/21/24/39 TL5 220-240V

HF-Performer Intelligent for Master and ECO TL5 HE/HO, TL-D and PL-L lamps HF-Performer Intelligent features automatic recognition of the connected lamp and is independently able to adjust its operation parameters exactly to the respective lamp. This results in a substantial benefit, especially for T5 lamps, as it means TL5 HE and HO lamps of the same length can be interchanged. With a choice of seven ballasts, the customer is able to handle efficiently every possible combination of Master TL5 and Eco, TL-D, and PL-L lamps.

Product data

• General Characteristics

Application code	EII
Rated Lamptype	TL5
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	14-39
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 360x30x22
Energy Efficiency Index	A2
Lifetime 90% surv.@Tcaselife	50000 hr
Ignition Method	Warm Start

• Operating Characteristics

Automatic restart	Yes
Ignition time	5.0 (max) s
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Inrush current Peak	31 (max) A
Inrush current Width	0.35 ms
Earth leakage current	0.5 (max) mA
Power losses gear	2.9-4.6 W
Constant wattage deviation	-2%/+2%
Ballast Lumen Factor	1.00 -
Battery voltage running lamps	198-276
Max ballast on MCB(16A type B)	12 x
Crestfactor	1.7 (max) -
Hum and Noise level	Inaudible

• Wiring Characteristics

Cable-Cap output-wires to earth	70 pF
Cable-Cap output-wires mutual	70 pF
Conn.type input terminals	Insert
Conn.type output terminals	Insert
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Wcs Input terminals	0.50-1.00 mm ²
Wcs Output terminals	0.50-1.00 mm ²

• System Chars on driver level

Power Loss on TL5 HO	3.6/4.6
Lamp Power on TL5 HO	46.8/71.2
System Power on TL5 HO	50.4/75.8
Rated Lamp Power on TL5 HO	24/39
Rated Lamp Power on TL5 HE	14/21
System Power on TL5 HE	31.5/46.7
Lamp Power on TL5 HE	28.6/42.8
Power Loss on TL5 HE	2.9/3.9



asimpleswitch.com

PHILIPS

HF-Performer Intelligent for TL5 HE/HO lamps

• Temperature Characteristics

T-case life	75 C
T-case maximum	75 (max) C
T-ignition	-25 (min), 50 (max) C
T-ambient	-25 (min), 50 (max) C
T-storage	-40 (min), 80 (max) C

• Product Dimensions

Length A1	360 mm
Fixing Hole Distance	350 mm
Length A2	
Width B1	30 mm
Height C1	22 mm
Fixing Hole Diameter D1	4.2 mm

• Approval & Application Chars


EMI 9kHz .. 30 MHz	EN 55015
EMI 30 MHz .. 1000MHz	EN 55022 Class B
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001

Harmonic current emissions	IEC 61000-3-2
EMC Immunity	IEC 61547
Vibrations	IEC 68-2-6 Fc
Bumps	IEC 68-2-29 Eb
Humidity	EN 61347-2-3 clause 11
Approval marks	ENEC / VDE-EMV
CE marking	Yes
Temperature marking	110 [Yes]
Emergency standard	IEC 60598-2-22

• Product Data

Order code	913700624266
Full product code	913700624266
Full product name	HF-Pi 2 14/21/24/39 TL5 EII 220-240V
Order product name	HF-Pi 2 14/21/24/39 TL5 EII 220-240V
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500915009
Bar code on outerbox - EAN3	8711500915016
Logistic code(s) - 12NC	913700624266
Net weight per piece	0.290 kg

Dimensional drawing

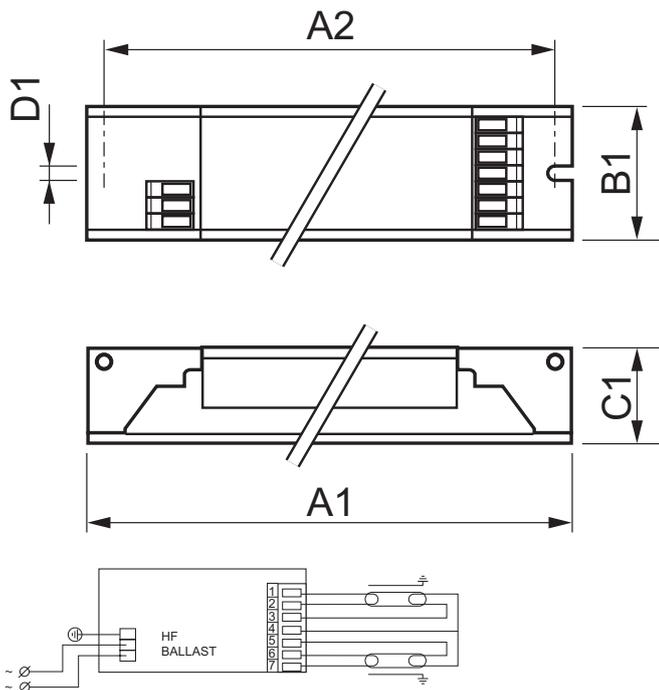

HF-Performer Intelligent 2 14/21/24/39 TL5 220-240V

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-Pi 2 14/21/24/39 TL5 EII 220-240V	360	350	30	22	4.2

HF-Performer Intelligent for TL5 HE/HO lamps

Photometric data

Ballast type	Lamp type	Lamp power		T _a = 40°C	T _a = 50°C	T _a = 60°C	Remarks T _a max = 61°C
HF-Pi 2 14/21/25/39 TL5 EII 220-240V	TL5 HE	14W					
	TL5 HE	21W					
	TL5 HO	24W					
	TL5 HO	39W					
	TL5 HE ECO	13W					
	TL5 HE ECO	19W					
	TL5 HO ECO	20W					
	TL5 HO ECO	34W					
	TL-D General	18W	T _c	=54°C	=65°C	=74°C	75°C
	TL-D General	36W	Lifetime	100,000 Hrs	100,000 Hrs	100,000 Hrs	93,000 Hrs
	PL-L	18W					
	PL-L	24W					
	PL-L	36W					
	PL-L	40W					
	TL5-C	22W					
TL5-C	40W						



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, August 22
data subject to change