


IIS715



Inductive sensor

IIB2022-BRKG/2M/PUR/UP

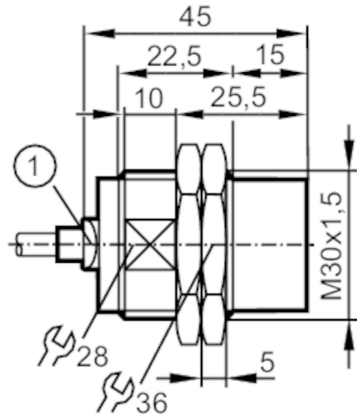

1 LED yellow



Product characteristics

| | |
|--------------------|--------------------|
| Electrical design | PNP/NPN |
| Output function | normally closed |
| Sensing range [mm] | 22 |
| Housing | threaded type |
| Dimensions [mm] | M30 x 1.5 / L = 45 |

Application

| | |
|-----------------|---|
| Special feature | Drag chain suitability; Increased sensing range |
| Application | Industrial applications / factory automation |

Electrical data

| | |
|-----------------------------|--|
| Operating voltage [V] | 10...30 DC; ("supply limited voltage / current" to UL) |
| Protection class | III |
| Reverse polarity protection | yes |

Outputs

| | |
|--|-----------------|
| Electrical design | PNP/NPN |
| Output function | normally closed |
| Max. voltage drop switching output DC [V] | 5 |
| Minimum load current [mA] | 2 |
| Max. leakage current [mA] | 0.6 |
| Permanent current rating of switching output DC [mA] | 100 |
| Switching frequency DC [Hz] | 100 |
| Short-circuit protection | yes |
| Overload protection | yes |

IIS715



Inductive sensor

IIB2022-BRKG/2M/PUR/UP

| Detection zone | | |
|-------------------------------|---------------------------------|--|
| Sensing range | [mm] | 22 |
| Real sensing range Sr | [mm] | 22 ± 10 % |
| Operating distance | [mm] | 0...17.82 |
| Increased sensing range | | yes |
| Accuracy / deviations | | |
| Correction factor | | steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3 |
| Hysteresis | [% of Sr] | 3...15 |
| Switch point drift | [% of Sr] | -10...10 |
| Operating conditions | | |
| Ambient temperature | [°C] | -40...85 |
| Protection | | IP 65; IP 66; IP 67; IP 68; IP 69K |
| Tests / approvals | | |
| EMC | EN 61000-4-2 ESD | 4 kV CD / 8 kV AD |
| | EN 61000-4-3 HF radiated | 10 V/m |
| | EN 61000-4-4 Burst | 2 kV |
| | EN 61000-4-6 HF conducted | 10 V |
| | EN 55011 | class B |
| Vibration resistance | EN 60068-2-6 Fc | 20 g (10...3000 Hz) / 50 sweep cycles per frequency; 1 octave per minute in 3 axes |
| Shock resistance | EN 60068-2-27 Ea | 100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes |
| Continuous shock resistance | EN 60068-2-27 | 40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes |
| Fast temperature change | EN 60068-2-14 Na | TA = -40 °C; TB = 85 °C; t1 = 30 min; t2 = < 10 s; 50 cycles |
| Salt spray test | EN 60068-2-52 Kb | severity level 5 (4 test cycles) |
| MTTF | [years] | 899 |
| UL approval | Ta | -25...75 °C |
| | Enclosure type | Type 1 |
| | voltage supply | Limited Voltage/Current |
| | UL Approval no. | A007 |
| | File number UL | E174191 |
| Mechanical data | | |
| Weight | [g] | 141.7 |
| Housing | | threaded type |
| Mounting | | non-flush mountable |
| Dimensions | [mm] | M30 x 1.5 / L = 45 |
| Thread designation | | M30 x 1.5 |
| Materials | | brass white bronze coated; sensing face: PBT orange; LED window: PEI; lock nuts: brass white bronze coated |
| Drag chain suitability | | yes |
| Drag chain suitability | bending radius for flexible use | min. 10 x cable diameter |
| | bending cycles | > 5 Mio. |
| Displays / operating elements | | |
| Display | | switching status 1 x LED, yellow |

IIS715



Inductive sensor

IIB2022-BRKG/2M/PUR/UP

Accessories

Accessories (supplied)

lock nuts: 2

lock washer: 1

Remarks


Pack quantity

1 pcs.

Electrical connection

Cable: 2 m, PUR; 2 x 0.34 mm²

Connection

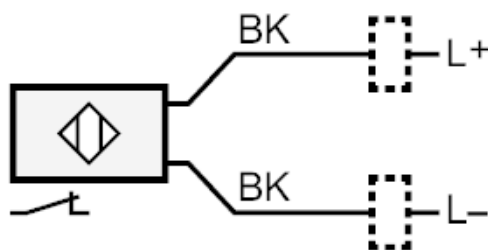

Core colours :

BK =

black