




IHA3010-BPKG

Inductive sensors

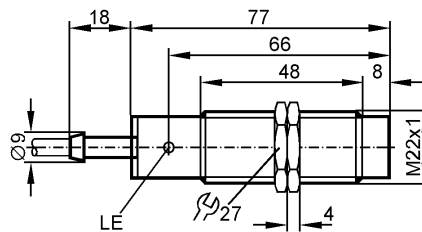

Product characteristics

Inductive sensor

Metal thread M22 x 1

Cable

Sensing range 10 mm; [nf] non-flush mountable

Electrical data

Electrical design

Operating voltage [V]

Current consumption [mA]

Protection class

Reverse polarity protection

Outputs

Output function

Voltage drop [V]

Current rating [mA]

Short-circuit protection

Overload protection

Switching frequency [Hz]

Range

Sensing range [mm]

Real sensing range (Sr) [mm]

Operating distance [mm]

Accuracy / deviations

Correction factors

Hysteresis [% of Sr]

Switch-point drift [% of Sr]

Environment

Ambient temperature [°C]

Protection

Tests / approvals

EMC

MTTF [Years]

Mechanical data

Mounting

Housing materials

Weight [kg]

DC PNP

10...36 DC

15 (24 V)

II

yes

normally open

< 2.5

250

pulsed

yes

250

10

10 ± 10 %

0...8.1

mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.3 / Cu approx. 0.2

1...15

-10...10

-25...80

IP 67

EN 60947-5-2

EN 55011:

class B

1853

non-flush mountable

Brass white bronze coated; PBT

0.182

IH7001 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Displays / operating elements

Output status indication LED | yellow

Electrical connection

Connection | PVC cable / 2 m; 3 x 0.5 mm²


Wiring

Core colours

BN brown

BU blue

BK black



Accessories

Accessories (included) | 2 lock nuts

Remarks

Pack quantity [piece] | 1