




202659
OGUTI 002 P3K-TSSL
Optical label sensor

- Fast, simple, safe: Sensitivity adjustment via teach key
- Auto-teach during a running process
- LED indicator for the teach procedure
- Detection of an extremely wide range of different labels
- Large functional reserve
- Light/dark switching
- 5-year warranty

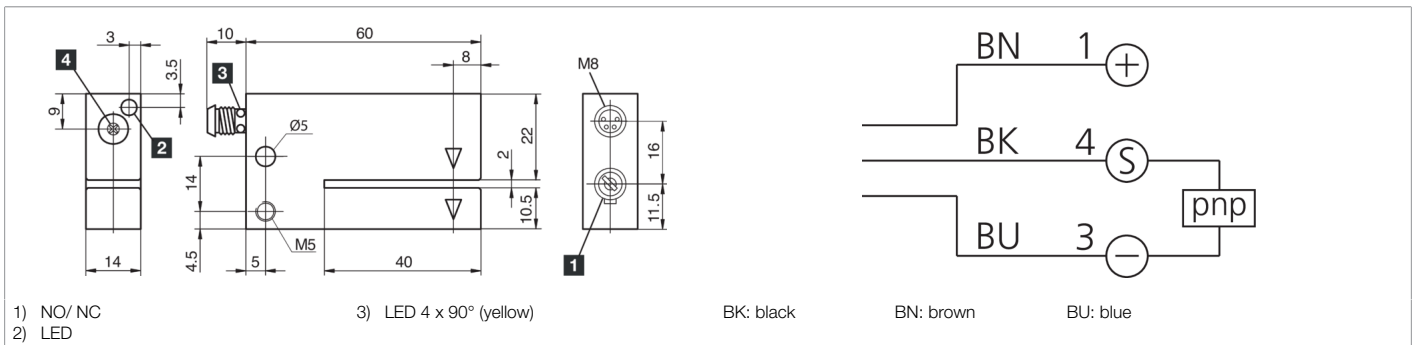

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	10 ... 35 V DC (Supply Class 2)
No-load current (max.)	35 mA
Insulation voltage endurance	500 V
Leg length internal	40 mm
Housing dimensions	35 x 60 x 14 mm
Housing length	60 mm
Housing height	35 mm
Housing width	14 mm
Housing material	Die-cast zinc (Black, painted)
Protection class	III, operation on protective low voltage
Operating principle	Optical
Evaluation	digital
Design	Fork
Switching output	pnp, 200 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Light source	LED
Color	Infrared
Wavelength	880 nm
Modulation	Clocked
Ambient light immunity	40 kLx
Fork opening	2 mm
Resolution	Ø 0,5 mm
Switching hysteresis (max.)	0,1 mm
Reproducibility	< 0,03 mm
Sensitivity adjustment	Teach button
Switching frequency	3.000 Hz

**202659****OGUTI 002 P3K-TSSL****Optical label sensor****Technical data (typ.)****+20°C, 24 V DC**

Ambient temperature during operation

-10 ... +60 °C

Protection type

IP 67

Connection

Connector, M8, 3-pin

Connection cable

TK ...

More information / accessories<https://www.di-soric.com/202659>