

# Flangeless Rectangular LED

## Super Green, 2mm x 7mm

**multicomp** PRO

**RoHS  
Compliant**

### Specifications

Dice Material : AlInGaP  
Emitted colour : Super Green  
Lens colour : Green Diffused  
Peak wavelength : 570nm  
Viewing angle : 120°  
Luminous intensity (IV) : 60mcd

#### Electrical / Optical Characteristics at Ta = 25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	IV	45	60	85	mcd	IF = 20mA
Viewing Angle	2θ1/2		120		deg	
Peak Emission Wavelength	λp		570		nm	
Dominant Wavelength	λD	568	571	575	nm	
Spectral Line Half-Width	Δλ		18		nm	
Forward Voltage	VF	1.8	2	2.6	V	VR=5V
Reverse Current	I <sub>r</sub>	-	-	10	uA	

▲ Luminous intensity (IV) ±10%, Forward Voltage (VF) ±0.1V, Wavelength (λd) ±0.5nm

#### Absolute Maximum Ratings: (Ta = 25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation	P <sub>d</sub>	85	mW
Peak Forward Current ( Duty 1/10 @ 1KHZ )	IF (Peak)	100	mA
Recommended Operating Current	IF (Rec)	30	mA
Electrostatic Discharge	ESD <sub>HBM</sub>	2000	V
Operating Temperature Range	T <sub>OPR</sub>	-40 to +85	°C
Storage Temperature Range	T <sub>STG</sub>	-40 to +100	°C
Lead Soldering Temperature Range (1.6 mm (1/16 inch) from body)	Reflow Soldering: 260°C for 5 sec. Hand Soldering: 350°C for 3 sec.		

Newark.com/multicomp-pro  
Farnell.com/multicomp-pro  
Element14.com/multicomp-pro

**multicomp** PRO


# Flangeless Rectangular LED

## Super Green, 2mm x 7mm


**multicomp** PRO

### Typical Electro-Optical Characteristics Curves


#### Super Green (AlInGaP $\lambda_P=570\text{nm}$ )

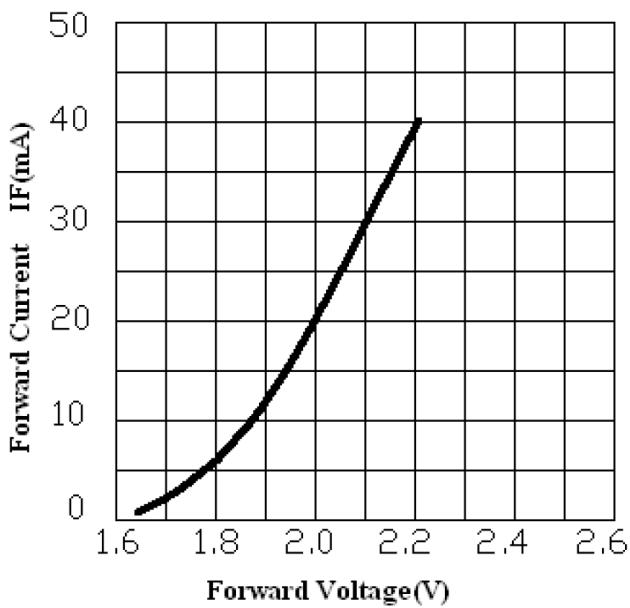


Forward Current vs. Forward Voltage

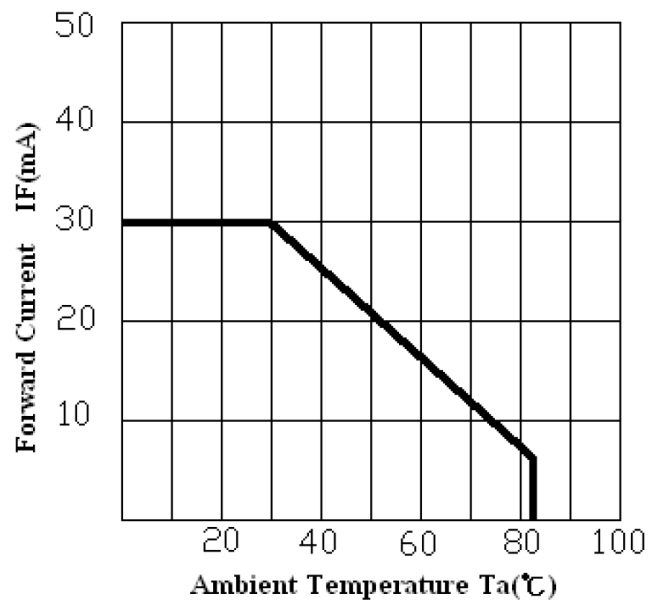

Forward Current Derating Curve

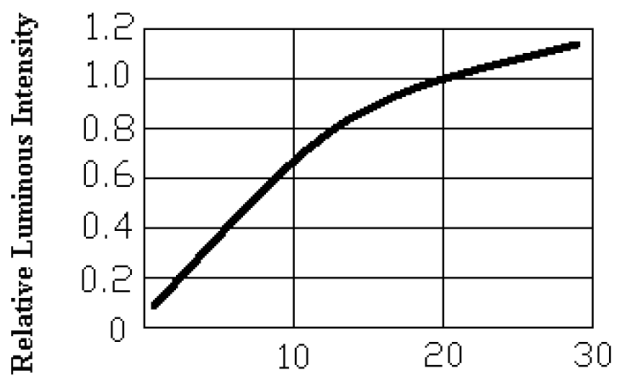

Forward current (mA)  $T_a=25^\circ\text{C}$   
Luminous Intensity vs. Forward current

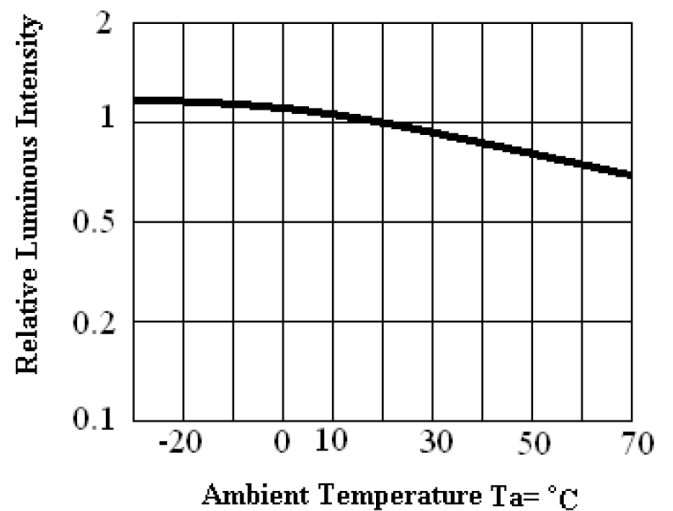


Ambient Temperature  $T_a = ^\circ\text{C}$   
Luminous Intensity vs. Ambient Temperature

# Flangeless Rectangular LED


## Super Green, 2mm x 7mm

**multicomp** PRO

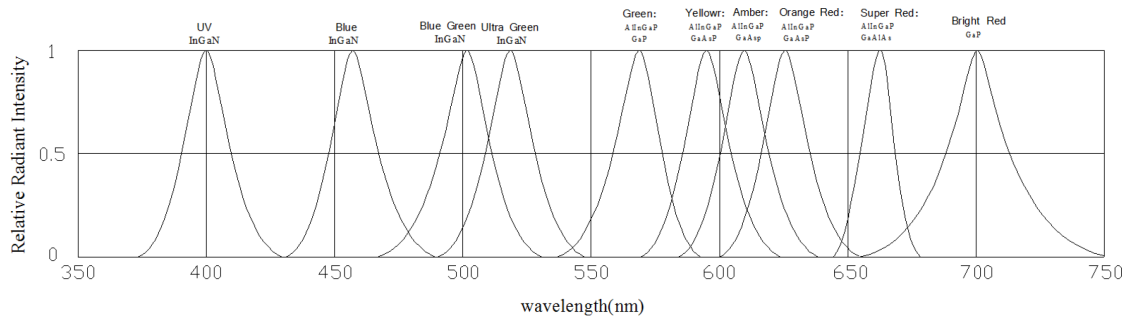

Relative Intensity VS. wavelength

### Dimensions

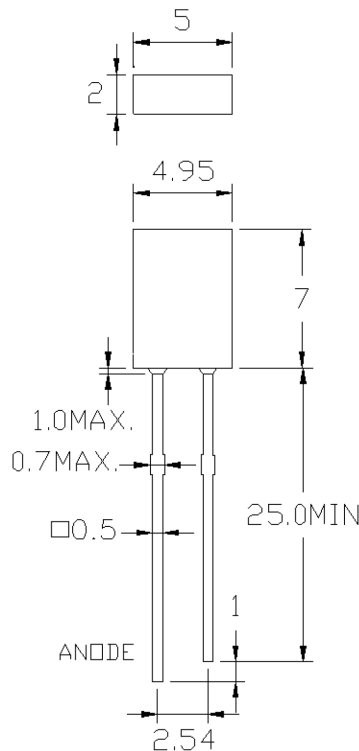

Dimensions : Millimetres

### Part Number Table

Description	Part Number
Flangeless Rectangular LED, Super Green, 570nm, 120°, 60mcd, Through hole	MP007980

**Important Notice :** This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro  
 Farnell.com/multicomp-pro  
 Element14.com/multicomp-pro

**multicomp** PRO