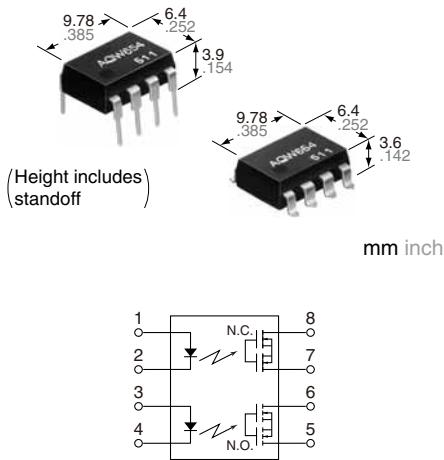




Both 1 Form A and 1 Form B contacts incorporated in a compact DIP8-pin with low on-resistance

**PhotoMOS®
HE 1 Form A & 1 Form B
(AQW654)**



FEATURES

1. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use
2. Controls low-level analog signals
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
3. High sensitivity and low on-resistance
Can control max. 0.16 A load current with 5 mA input current. Low on-resistance of max. 11 Ω.
4. Low-level off state leakage current of max. 1 μA

TYPICAL APPLICATIONS

- High-speed inspection machines
- Data communication equipment
- Telephone equipment
- Sensing equipment

RoHS compliant

TYPES

Output rating*	Package		Part No.				Packing quantity	
			Through hole terminal		Surface-mount terminal			
	Load voltage	Load current	Tube packing style		Tape and reel packing style			
					Picked from the 1/2/3/4-pin side	Picked from the 5/6/7/8-pin side		
AC/DC dual use	400 V	120 mA	DIP8-pin	AQW654	AQW654A	AQW654AX	AQW654AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.
								1,000 pcs

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

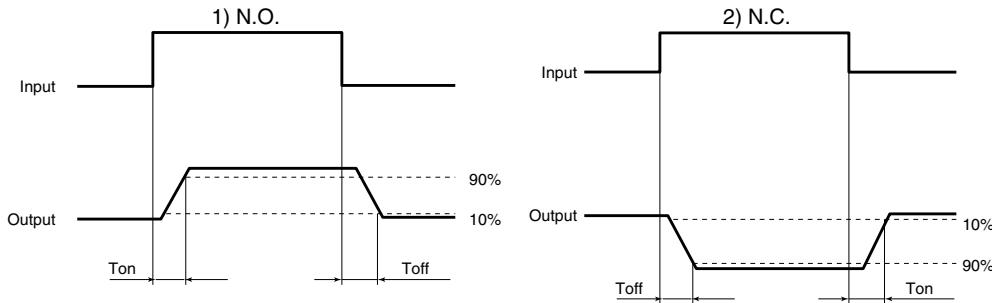
Item		Symbol	AQW654(A)	Remarks
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	5 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	400 V	
	Continuous load current	I _L	0.12A (0.16 A)	Peak AC, DC (): in case of using only 1 channel)
	Peak load current	I _{peak}	0.36 A	A connection: 100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW	
Total power dissipation		P _T	850 mW	
I/O isolation voltage		V _{iso}	1,500 V AC	Between input and output/between contact sets
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F	

HE 1 Form A & 1 Form B (AQW654)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW654(A)	Remarks
Input	LED operate current	Typical I _{On} (N.O.)	0.9 mA	I _L = Max.
	Maximum I _{Off} (N.C.)		3 mA	
	LED reverse current	Minimum I _{Off} (N.O.)	0.4 mA	I _L = Max.
	Typical I _{On} (N.C.)		0.8 mA	
Output	LED dropout voltage	Typical V _F	1.25 V (1.14 V at I _F = 5 mA)	I _F = 50 mA
	Maximum		1.5 V	
	On resistance	Typical R _{on}	11 Ω	I _F = 5 mA (N.O.) I _F = 0 mA (N.C.) I _L = Max. Within 1 s on time
	Maximum		16 Ω	
Transfer characteristics	Off state leakage current	Maximum I _{Leak}	1 μA	I _F = 0 mA (N.O.) I _F = 5 mA (N.C.) V _L = Max.
	Operate time*	Typical T _{on} (N.O.)	0.8 ms (N.O.) 1.2 ms (N.C.)	I _F = 0 mA → 5 mA I _L = Max.
	Maximum T _{off} (N.C.)		2 ms	
	Reverse time*	Typical T _{off} (N.O.)	0.04 ms (N.O.) 0.36 ms (N.C.)	I _F = 5 mA → 0 mA I _L = Max.
	I/O capacitance	Typical C _{iso}	0.8 pF	f = 1 MHz V _B = 0 V
	Maximum		1.5 pF	
	Initial I/O isolation resistance	Minimum R _{iso}	1,000 MΩ	500 V DC

*Operate/Reverse time



RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	5	mA

■ These products are not designed for automotive use.

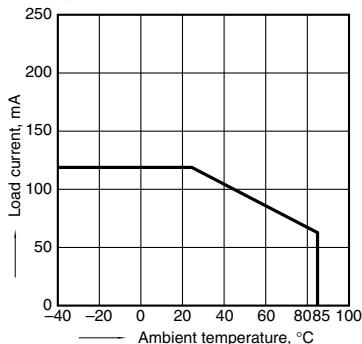
If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics

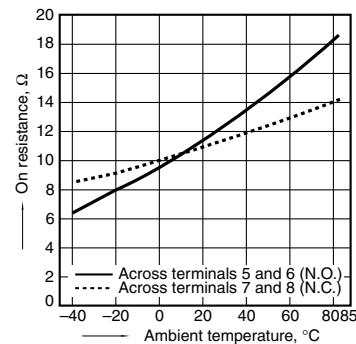
Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

When using 2 channels



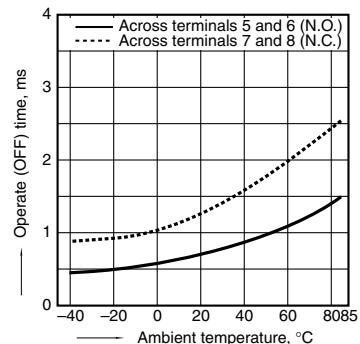
2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8; LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)



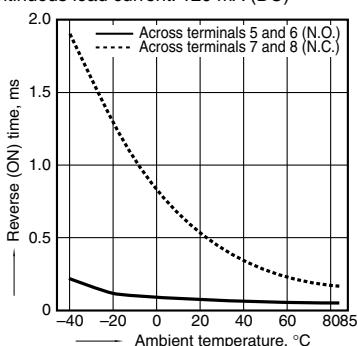
3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

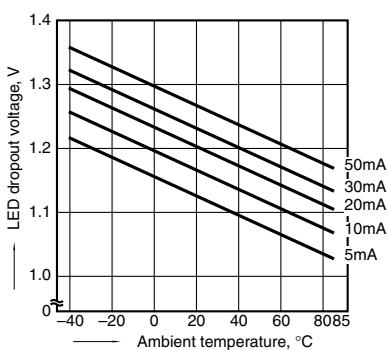


4. Reverse time vs. ambient temperature characteristics

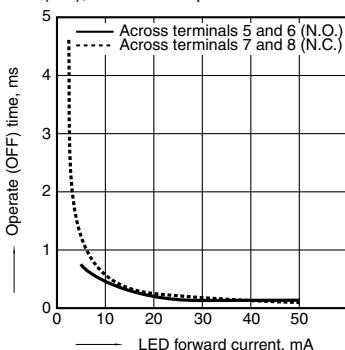
LED current: 5 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

**7. LED dropout voltage vs. ambient temperature characteristics**

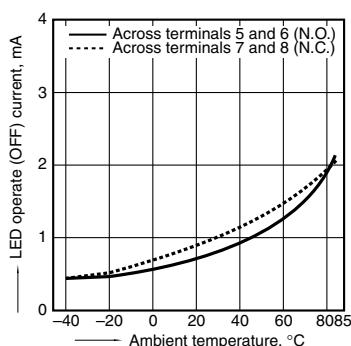
LED current: 5 to 50 mA

**10. Operate time vs. LED forward current characteristics**

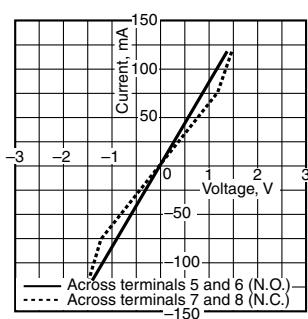
Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current:
120 mA (DC); Ambient temperature: 25°C 77°F

**5. LED operate current vs. ambient temperature characteristics**

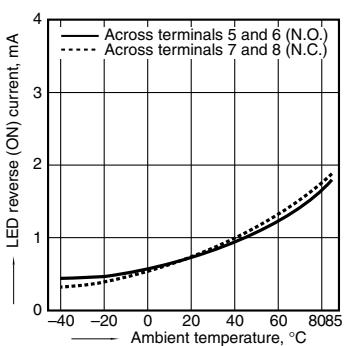
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

**8. Current vs. voltage characteristics of output at MOS portion**

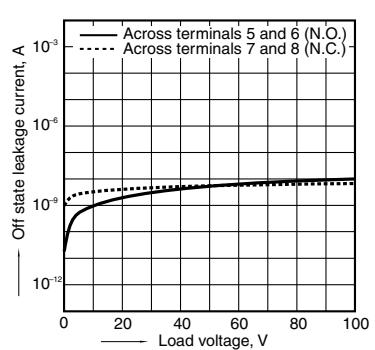
Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

**6. LED reverse current vs. ambient temperature characteristics**

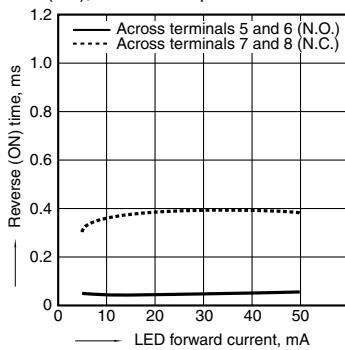
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

**9. Off state leakage current vs. load voltage characteristics**

Measured portion: between terminals 5 and 6,
7 and 8; Ambient temperature: 25°C 77°F

**11. Reverse time vs. LED forward current characteristics**

Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: 400 V (DC); Continuous load current:
120 mA (DC); Ambient temperature: 25°C 77°F

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

