





NOTES:

1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):  
 BODY - BRASS, NICKEL PLATING  
 CONTACT - BERYLLIUM COPPER, GOLD PLATING  
 INSULATOR - PTFE, NATURAL
2. ELECTRICAL:  
 A. IMPEDANCE: 50 OHM  
 B. FREQUENCY RANGE: DC 0-11 GHz  
 C. VSWR(RETURN LOSS): 1.3, MAX.  
 D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:  
 A. DURABILITY: 500 CYCLES MIN.  
 B. TEMPERATURE RANGE: - 65°C to +165°C
4. SEE AMPHENOL SPEC. 349-50586 FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A2	SEE SHEET 1	28-Oct-02	---	TONY
A3	SEE SHEET 1	21-Apr-03	---	TONY
A4	SEE SHEET 1	19-Sep-03	---	SHALY
B	SEE SHEET 1	28-Oct-02	---	SH
E	SEE SHEET 1	23-Jun-05	47077	ESZ

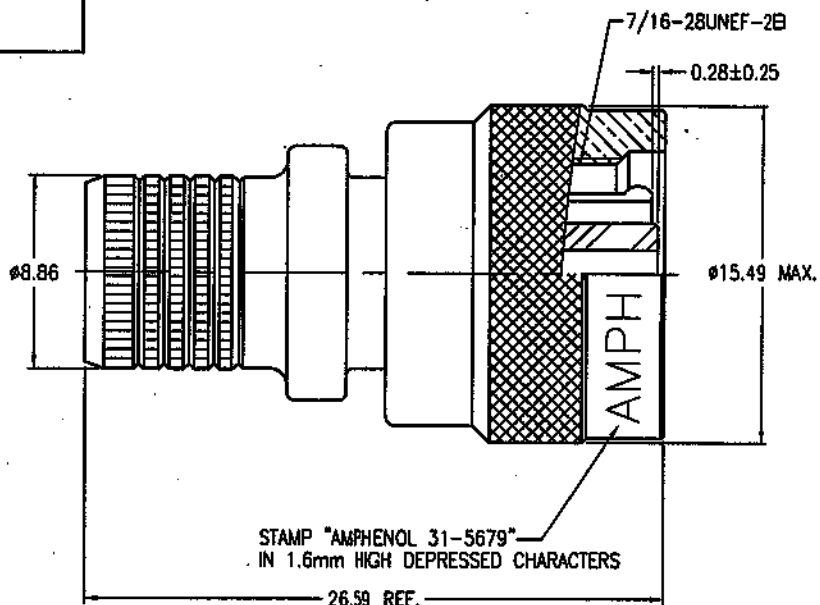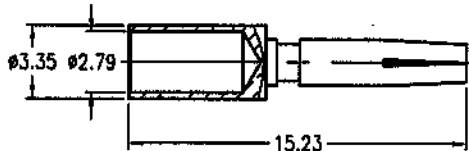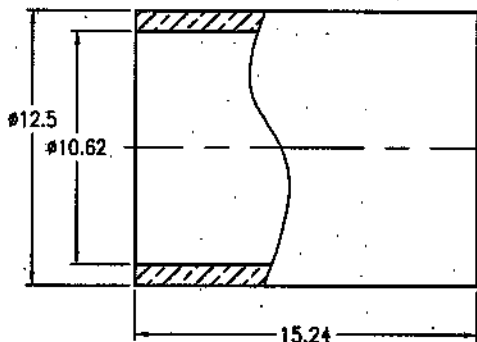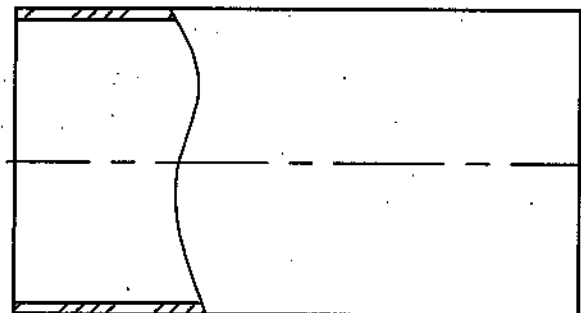

**CUSTOMER OUTLINE DRAWING**  
 ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 - 6mm ±0.1mm    6 - 30mm ±0.2mm    30 - 120mm ±0.3mm    ANGLES ±1°	MATERIAL	DRAWN ROCKY	DATE 23-Sep-05	TITLE TNC PLUG REVERSE INTERFACE (FOR BELDEN 9913 CABLE)			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com		
	REFERENCE	ENGINEER SCOTT.H	DATE 23-Sep-05	SCALE: 3/1	SHEET 2 OF 2		DRAWING NO. 31-5679		
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	FINISH	APPROVED SCOTT.H	DATE 23-Sep-05	DWG SIZE B	CODE ID 74868	REV E	ITEM NO. 31-5679		
		F:\DWG\CMPD\31\5679-ESZ						PART NO. 31-5679	