OVERVIEW OF BROEN HOSE FOR HANDHELD SHOWER

93 H XX XX XXXX

- 93 H — HAND HELD SHOWER
- XX — INLET CONNECTION
- XX — OUTLET CONNECTION
- XXXX — LENGTH

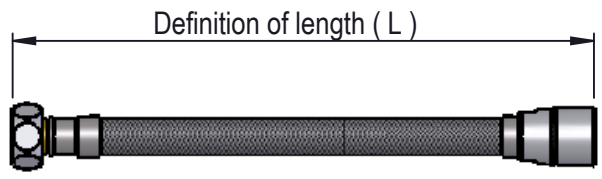

:Standard lengths of hoses (L):
0500 = 500mm
0700 = 700mm
1000 = 1000mm
1200 = 1200mm
1500 = 1500mm
2000 = 2000mm
2500 = 2500mm
3000 = 3000mm

:Length tolerance of hoses:
L = ≤400mm (- 0, +10mm)
L = 401mm to 1000mm (- 0, + 20mm)
L = >1000mm (- 0, + 30mm)

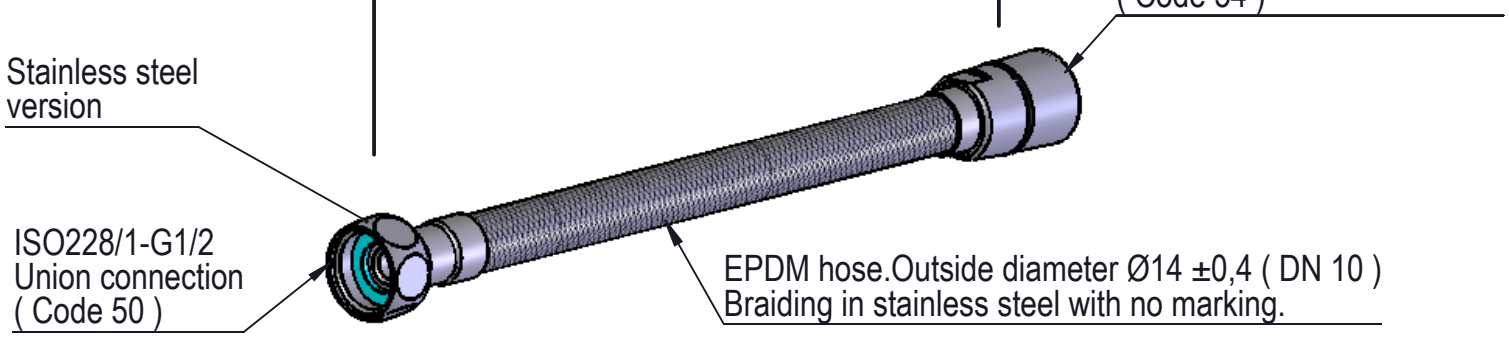

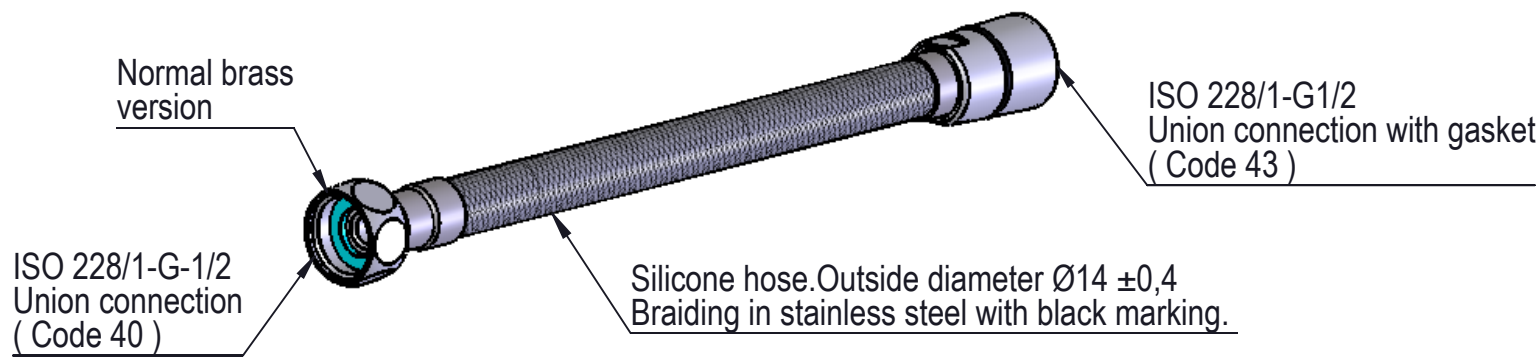

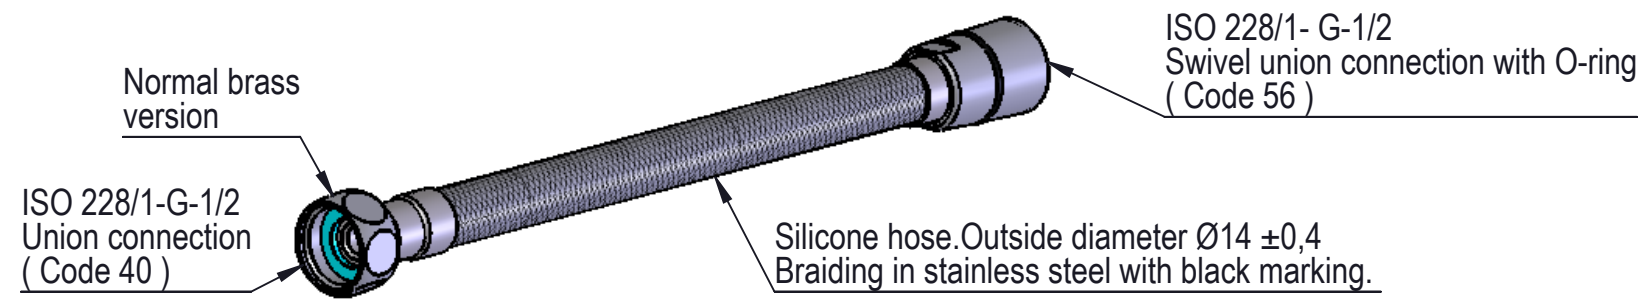

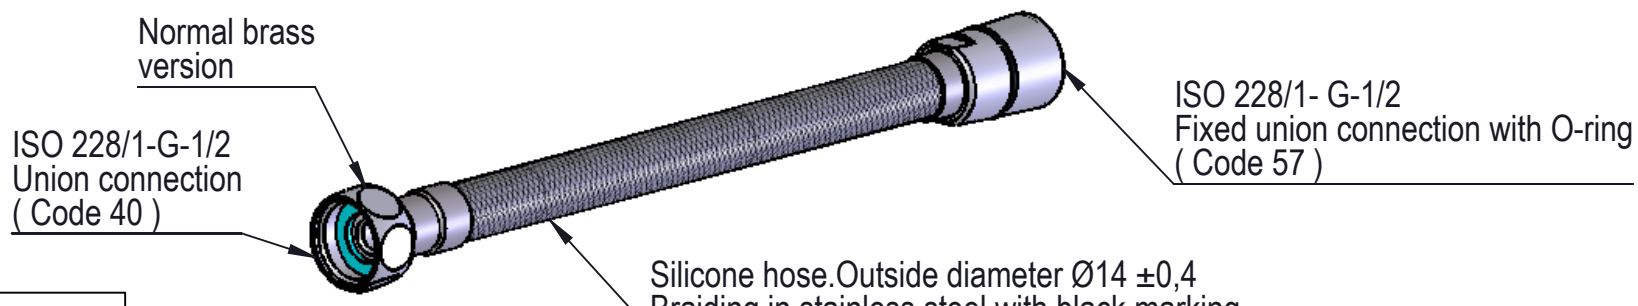

Technical details for hose:	
Inner hose material:	See hose
Braiding:	See hose
Hosematerials with media contact:	See hose
Sealing material	Aramide fibre / NBR
Inside diameter	Ø9,5 mm
Outside diameter	Ø14 mm
Max. working pressure	10 bar
Max. working temperature	70°C
Min. bending radius (inner)	40 mm
Min. length with connections	150 mm

Exampel of hose configuration:
1500mm hose with ISO 228/1-G½ Chrome union nut and chrome connection to hand shower 93H40431500.

Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:
B		20-12-16			MWA	

BROEN-LAB

This drawing is our property and cannot begiven to a third party, copied or otherwiseused without our permission. BROEN-LAB A/S.

Description:	General overview of hose design
Media:	ESS
Material:	
Specification:	
Comments:	
Drawing type:	Customer drawing
Weight:	Kg

All dimensions maked with ⬭ are inspection dimensions

Unspecified liniar tolerances:	Unspecified angular tolerances:

Designed by:	Drawn by:	Released on TM No.	Date:
?	BJP	6456	04-07-16

Format: A3 | Drawing No.: 93HXXXXXXXC

C:\LabGroup\02. SUB-ASSEMBLIES\Hoses\