




## Through-beam sensor transmitter

OGS-000A/LS-100-AK

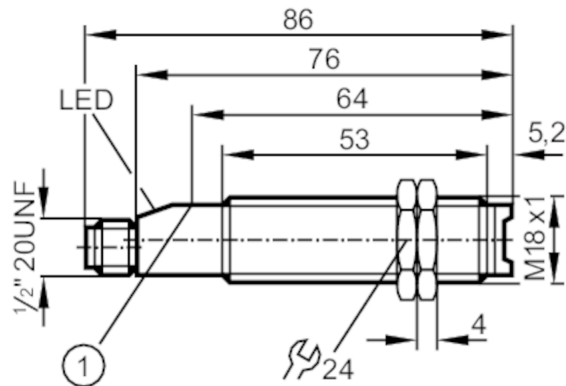

1 pushbutton without function



### Product characteristics

Type of light	infrared light
Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 76

### Application

Function principle	Through-beam sensor
--------------------	---------------------

### Electrical data

Frequency AC [Hz]	47...63
Operating voltage [V]	20...250 AC/DC
Current consumption [mA]	< 5
Protection class	II
Type of light	infrared light
Wave length [nm]	880

### Outputs

Short-circuit protection	no
Overload protection	no

### Detection zone

Transmitter / receiver	transmitter
Range [m]	< 15
Range adjustable	no
Max. light spot diameter [mm]	2000
Light spot dimensions refer to	at maximum range

### Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

### Tests / approvals

EMC	EN 60947-5-2
MTTF [years]	1662

# OG0030




## Through-beam sensor transmitter

OGS-000A/LS-100-AK

Mechanical data		
Weight	[g]	38
Housing		threaded type
Dimensions	[mm]	M18 x 1 / L = 76
Thread designation		M18 x 1
Materials		PBT
Lens material		PMMA
Displays / operating elements		
Display	operation	1 x LED, green
Accessories		
Accessories (supplied)		lock nuts: 2 x
Remarks		
Pack quantity		1 pcs.

### Electrical connection

Connector: 1 x 1/2"



### Connection

