

# LP and LT Xenon Beacons



553 9430  
9441  
9453  
9465

## technical specification - LP series:

MODEL	VOLTAGE	VOLTAGE RANGE	POWER OUTPUT	CURRENT CONSUMPTION (mA)					FLASH RATE
				@6V	@12V	@24V	@30V	@100V	
LP1X12/0.5	12	10 - 15 Vdc	0.5W	-	50	-	-	-	60/MIN
LP1XMV/0.5	MULTI	10 - 100 Vdc 20 - 72 Vac	0.5W	-	60	37	30	20	60/MIN
LP1X06/1	6	4.7 - 7.5 Vdc	1W	240	-	-	-	-	60/MIN
LP1X12/1	12	10 - 15 Vdc	1W	-	115	-	-	-	60/MIN
LP1X24/1	24	20 - 30 Vdc	1W	-	-	55	-	-	60/MIN
1205301 LP1XMV/1	MULTI	10 - 100 Vdc 20 - 72 Vac	1W	-	112	63	50	29	60/MIN
LP1X12/2	12	10-15 Vdc	2W	-	220	-	-	-	60/MIN
LP1X24/2	24	20 - 30 Vdc	2W	-	-	110	-	-	60/MIN
LP1X24/2ac	24ac	20 - 30 Vac	2W	-	-	100	-	-	60/MIN
LP1X50/2	50	40 - 55 Vdc	2W	-	-	-	55	-	60/MIN
LP1X110/2ac	110ac	90 - 125 Vac	2W	-	-	-	-	-	60/MIN
LP1X230/2ac	230ac	207 - 253 Vac	2W	-	-	-	-	-	60/MIN
1206201 LP4XMV/2	MULTI	10 - 100 Vdc 20 - 72 Vac	2W	-	130	95	83	37	75/MIN
1206301 LP3X12/5 Sync	12	10 - 15 Vdc	5W	-	360	-	-	-	90/MIN
LP3X24/5 Sync	24	20 - 30 Vdc	5W	-	-	160	-	-	90/MIN
LP4XMV/5	MULTI	10 - 100 Vdc 20 - 72 Vac	5W	-	250	200	112	60	75/MIN

Operating temperature -20°C - +55°C. Weight 0.1Kg (nominal).

OTHER FLASH RATES AVAILABLE TO SPECIAL ORDER

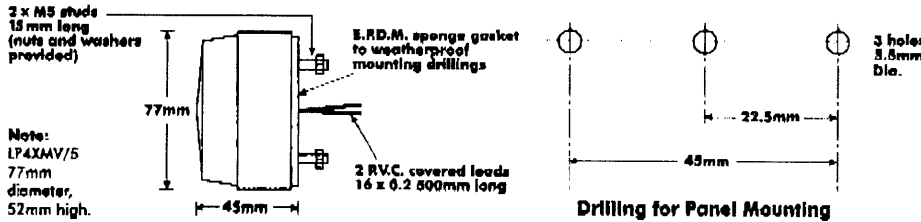

Note:  
LP4XMV/5  
77mm  
diameter,  
52mm high.

Drilling for Panel Mounting




High voltage transient and polarity reversal protection fitted.  
CE - Complies with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC, where appropriate.

## technical specification - LT series:

MODEL	VOLTAGE	VOLTAGE RANGE	POWER OUTPUT	CURRENT CONSUMPTION (mA)					FLASH RATE
				@6V	@12V	@24V	@30V	@100V	
LT4XMV/2	MULTI	10 - 100 Vdc 20 - 72 Vac	2W	-	130	95	83	37	75/MIN
LT2X06/5	6	4 - 7 Vdc	5W	1000	-	-	-	-	120/MIN
LT3X12/5	12	10 - 15 Vdc	5W	-	360	-	-	-	90/MIN
LT3X24/5	24	20 - 30 Vdc	5W	-	-	160	-	-	90/MIN
LT2X50/5	50	40 - 60 Vdc	5W	-	-	-	100	-	120/MIN
LT3X110/5ac	110ac	90 - 125 Vac	5W	-	-	-	-	-	90/MIN
LT3X230/5ac	230ac	207 - 253 Vdc	5W	-	-	-	-	-	90/MIN
LT4XMV/5	MULTI	10 - 100 Vdc 20 - 72 Vac	5W	-	255	190	112	70	75/MIN

Operating temperature -20°C - +55°C. Weight 0.2Kg (nominal).

OTHER FLASH RATES AVAILABLE TO SPECIAL ORDER

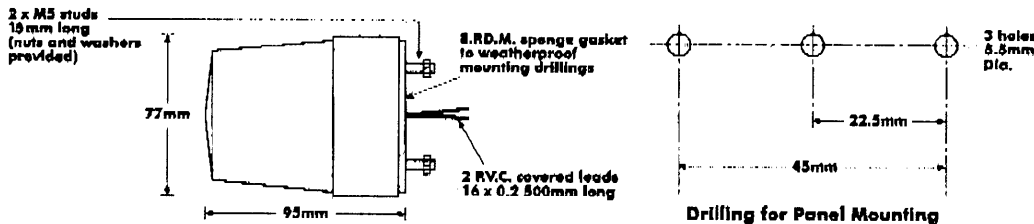

Drilling for Panel Mounting



High voltage transient and polarity reversal protection fitted.  
CE - Complies with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC, where appropriate.



Primrose Hill, Kings Langley, Herts WD4 8ST, England.

Tel: (U.K.) 01923 269522  
(Int.) +44 1923 269522

Fax: (U.K.) 01923 260167  
(Int.) +44 1923 260167

E-mail: sales@deltadesign.co.uk  
Web: http://www.deltadesign.co.uk



BS EN ISO 9001  
Certificate No. 2272

Your Delta Design distributor:




All specifications are nominal and subject to change without notice.

3539490

# Accessories for Xenon Beacons

Reference	Description	LP	LT	RB	EL	SQ	SC
FX1	Mounting Box, available in grey or white	•					
FX2	Mounting Base	•	•				
FX40	Mounting Bracket 52103402	•	•				
FX24	Surface Mount / Side Entry Kit						
FX9	Protector Guard			•			
FX10	Protector Guard						
FX23	Protector Guard						
FX7	Single Bolt Kit						
FX12	Single Bolt Kit						
FX14	Mounting Bracket						
FX28	Cable Entry Kit						
FX32	DC Sounder						
FX33	DC Sounder as FX28						
FX34	DC Sounder as FX28						
FX35	DC Sounder as FX28						
FX36	DC Sounder as FX28						
FX37	DC Sounder as FX28						
FX38	DC Sounder as FX28						
FX39	DC Sounder as FX28						
FX41	DC Sounder as FX28						
FX42	DC Sounder as FX28						
FX43	DC Sounder as FX28						
FX44	DC Sounder as FX28						
FX45	DC Sounder as FX28						
FX46	DC Sounder as FX28						
FX47	DC Sounder as FX28						
FX48	DC Sounder as FX28						
FX49	DC Sounder as FX28						
FX50	DC Sounder as FX28						
FX51	DC Sounder as FX28						
FX52	DC Sounder as FX28						
FX53	DC Sounder as FX28						
FX54	DC Sounder as FX28						
FX55	DC Sounder as FX28						
FX56	DC Sounder as FX28						
FX57	DC Sounder as FX28						
FX58	DC Sounder as FX28						
FX59	DC Sounder as FX28						
FX60	DC Sounder as FX28						
FX61	DC Sounder as FX28						
FX62	DC Sounder as FX28						
FX63	DC Sounder as FX28						
FX64	DC Sounder as FX28						
FX65	DC Sounder as FX28						
FX66	DC Sounder as FX28						
FX67	DC Sounder as FX28						
FX68	DC Sounder as FX28						
FX69	DC Sounder as FX28						
FX70	DC Sounder as FX28						
FX71	DC Sounder as FX28						
FX72	DC Sounder as FX28						
FX73	DC Sounder as FX28						
FX74	DC Sounder as FX28						
FX75	DC Sounder as FX28						
FX76	DC Sounder as FX28						
FX77	DC Sounder as FX28						
FX78	DC Sounder as FX28						
FX79	DC Sounder as FX28						
FX80	DC Sounder as FX28						
FX81	DC Sounder as FX28						
FX82	DC Sounder as FX28						
FX83	DC Sounder as FX28						
FX84	DC Sounder as FX28						
FX85	DC Sounder as FX28						
FX86	DC Sounder as FX28						
FX87	DC Sounder as FX28						
FX88	DC Sounder as FX28						
FX89	DC Sounder as FX28						
FX90	DC Sounder as FX28						
FX91	DC Sounder as FX28						
FX92	DC Sounder as FX28						
FX93	DC Sounder as FX28						
FX94	DC Sounder as FX28						
FX95	DC Sounder as FX28						
FX96	DC Sounder as FX28						
FX97	DC Sounder as FX28						
FX98	DC Sounder as FX28						
FX99	DC Sounder as FX28						
FX100	DC Sounder as FX28						

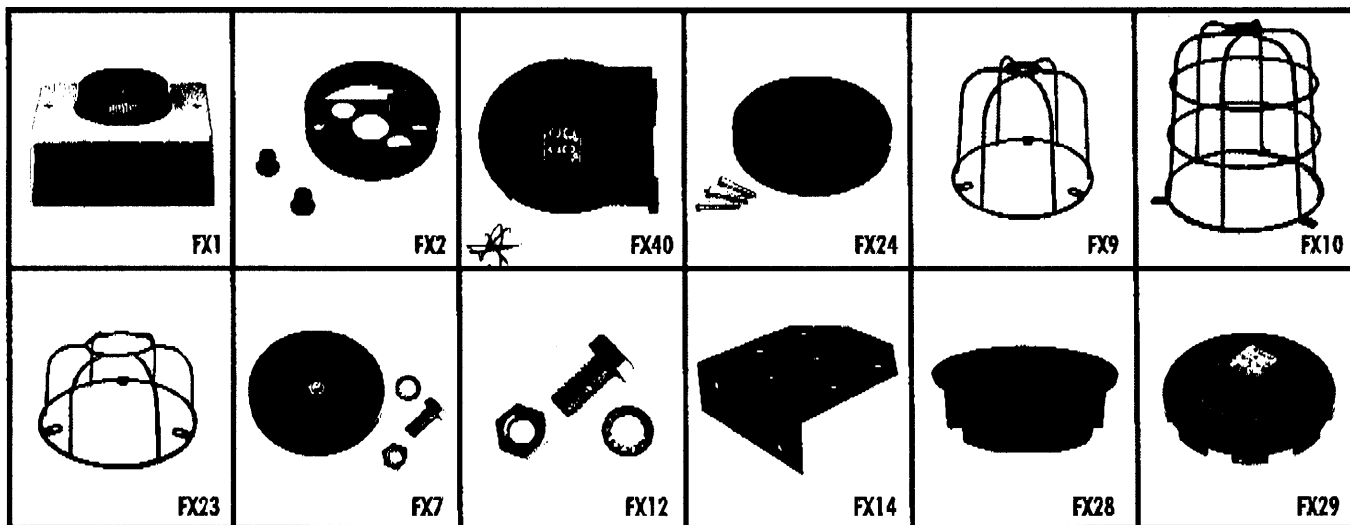

**delta design**  
 a division of NICOTECH Limited

Primrose Hill, Kings Langley, Herts WD4 8ST, England.  
 Tel: (U.K.) 01923 269522 (Int.) +44 1923 269522  
 Fax: (U.K.) 01923 260167 (Int.) +44 1923 260167  
 Email: sales@deltadesign.co.uk Web: http://www.deltadesign.co.uk

