



NPN General Purpose Amplifier **multicomp** PRO



Features

- For general AF applications
- Complementary PNP type available BC807
- High collector current
- High current gain
- Low collector-emitter saturation voltage



Applications

- General purpose medium power amplifier
- Switching requiring collector currents up to 1.2mA

Maximum Ratings

Parameter	Symbol	Value	Unit
Collector - Base Voltage	V_{CBO}	50	V
Collector - Emitter Voltage	V_{CEO}	45	
Emitter - Base Voltage	V_{ebo}	5	
Collector Current Continuous	I_C	500	mA
Collector Dissipation	P_C	300	mW
Junction and Storage Temperature	T_j, T_{stg}	-65 to +150	°C

Pin Configuration:

1. Base
2. Emitter
3. Collector

Electrical Characteristics ($T_{amb} = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Collector - Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=10\mu\text{A}, I_E=0$	50			V
Collector - Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=10\text{mA}, I_B=0$	45			
Emitter - Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=10\mu\text{A}, I_C=0$	5			
Collector Cut-off Current	I_{CBO}	$V_{CB}=25\text{V}, I_E=0$			-0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{CE}=4\text{V}, I_E=0$			-0.1	
DC Current Gain	h_{FE}	$V_{CE}=1\text{V}, I_C=-100\text{mA}$	100		600	
	BC817		100		250	
	BC817-16		160		400	
	BC817-40		250		600	
DC Current Gain	h_{FE}	$V_{CE}=1\text{V}, I_C=-300\text{mA}$	40			
	BC817		60			
	BC817-16		100			
	BC817-40		170			
Collector - Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			0.7	V
Base - Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=500\text{mA}, I_B=50\text{mA}$			1.2	

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro

multicomp PRO


NPN General Purpose Amplifier **multicomp** PRO

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Output Capacitance	C_{obo}	$V_{CB}=10V, f=1MHz$		6		pF
Transition Frequency	f_T	$V_{CE}=5V, I_C=50mA$ $f=100MHz$		170		MHz

Typical Characteristics: $T_{amb}=25^\circ C$ unless otherwise specified


Ratings & Characteristic Curves

Total power dissipation $P_{tot} = f(T_S)$

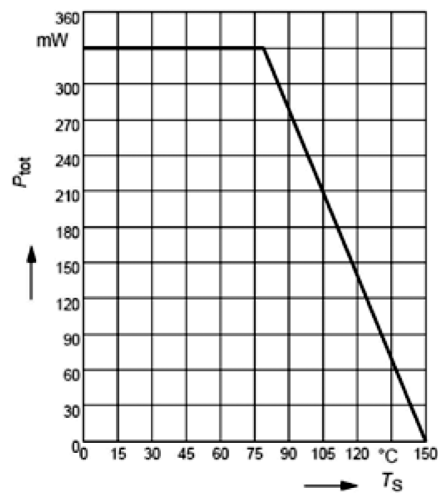


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

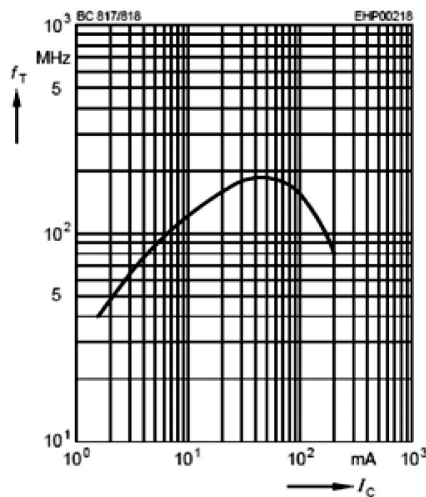


Permissible pulse load

$P_{totmax} / P_{totDC} = f(t_p)$

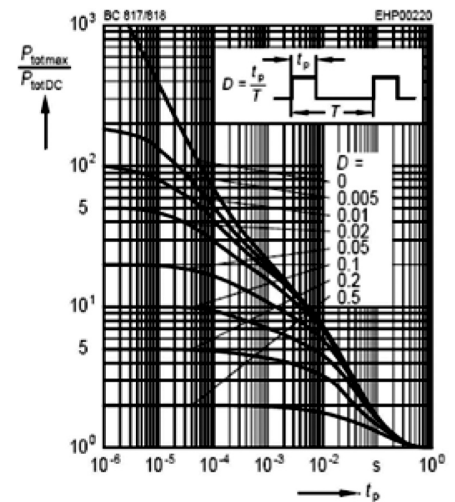


Collector cutoff current $I_{CBO} = f(T_A)$

$V_{CBO} = 25V$

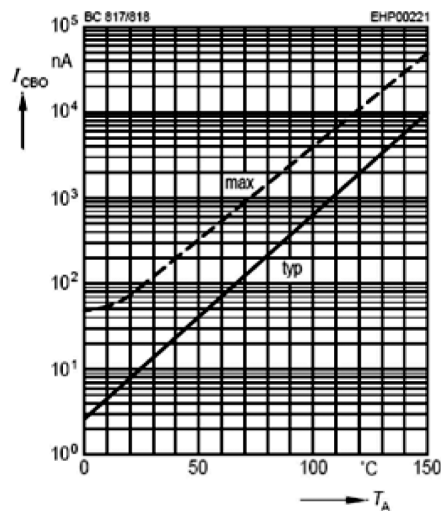


Base-emitter saturation voltage

$I_C = f(V_{BEsat}), h_{FE} = 10$

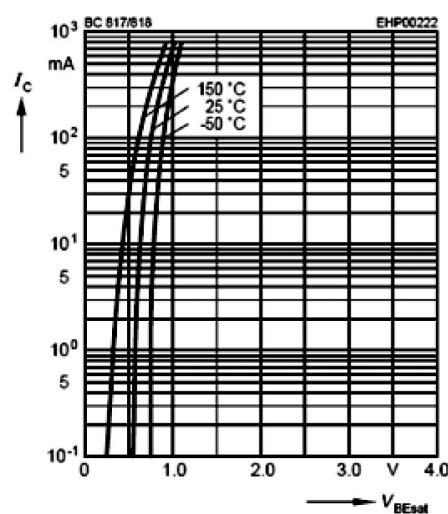

Collector-emitter saturation voltage


$I_C = f(V_{CEsat}), h_{FE} = 10$

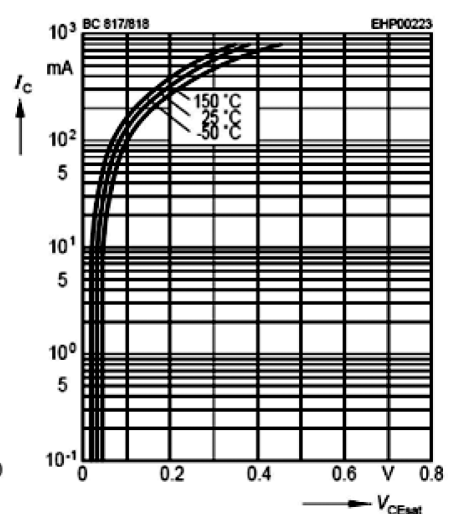

NPN General Purpose Amplifier **multicomp**PRO


DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 1V$

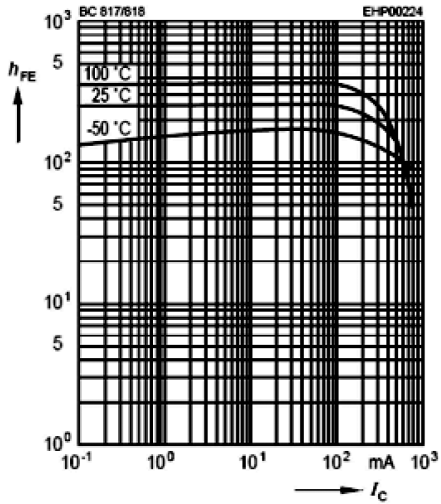


Package Outline

Plastic surface mounted package

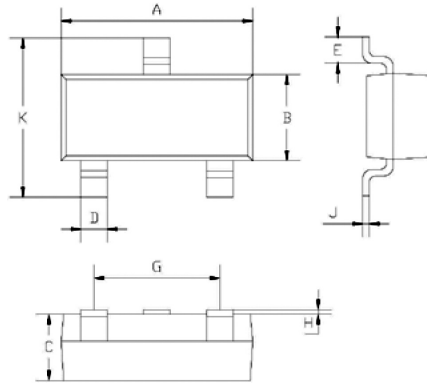

Dimensions	Min.	Max.
A	1.8	2.2
B	1.15	1.35
C	1 Typical	
D	0.15	0.35
E	0.25	0.4
G	1.2	1.4
H	0.02	0.1
J	0.1 Typical	
K	2.1	2.3

Soldering Footprint

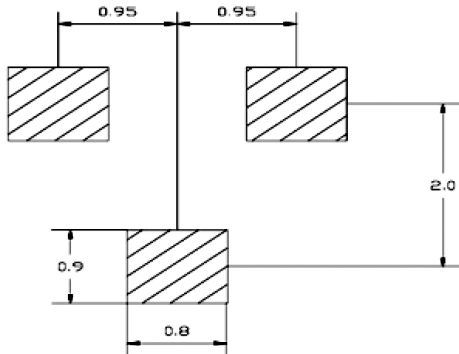

Dimensions : Millimetres

Part Number Table

Description	Part Number
Transistor, NPN, 0.5A, 45V, SOT23	BC817
	BC817-16
	BC817-25
	BC817-40

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicompPRO